arXiv:1405.1512v1 [cs.SE] 7 May 2014

Stream processing components: Isabelle/HOL formalisation and case studies

Maria Spichkova

May 8, 2014

Abstract

This set of theories presents an Isabelle/HOL+Isar formalisation of stream processing components introduces in FOCUS, a framework for formal specification and development of interactive systems. This is an extended and updated version of the formalisation, which was elaborated within the methodology "FOCUS on Isabelle". In addition, we also applied the formalisation on three case studies that cover different application areas: process control (Steam Boiler System), data transmission (FlexRay communication protocol), memory and processing components (Automotive-Gateway System).

Contents

1 Introduction **4**
1.1 Stream processing components 4
1.2 Case Study 1: Steam Boiler System 5
1.3 Case Study 2: FlexRay Communication Protocol 7
1.4 Case Study 3: Automotive-Gateway 10

2 Theory ArithExtras.thy **15**

3 Auxiliary Theory ListExtras.thy **15**

4 Auxiliary arithmetic lemmas **21**

5 FOCUS streams: operators and lemmas **23**
5.1 Definition of the FOCUS stream types 23
5.2 Definitions of operators 23
5.3 Properties of operators 35
5.3.1 Lemmas for concatenation operator 36
5.3.2 Lemmas for operators *ts* and *msg* 37
5.3.3 Lemmas for *inf_truncate* 39

5.3.4 Lemmas for *fin_make_untimed* 40
5.3.5 Lemmas for *inf_disj* and *inf_disjS* 42

6 Properties of time-synchronous streams of types bool and bit 43

7 Changing time granularity of the streams 45
7.1 Join time units 45
7.2 Split time units 49
7.3 Duality of the split and the join operators 50

8 Steam Boiler System: Specification 51

9 Steam Boiler System: Verification 52
9.1 Properties of the Boiler Component 52
9.2 Properties of the Controller Component 54
9.3 Properties of the Converter Component 65
9.4 Properties of the System 65
9.5 Proof of the Refinement Relation 68

10 FlexRay: Types 68

11 FlexRay: Specification 69
11.1 Auxiliary predicates 69
11.2 Specifications of the FlexRay components 70

12 FlexRay: Verification 72
12.1 Properties of the function Send 72
12.2 Properties of the component Scheduler 73
12.3 Disjoint Frames 74
12.4 Properties of the sheaf of channels nSend 76
12.5 Properties of the sheaf of channels nGet 80
12.6 Properties of the sheaf of channels nStore 82
12.7 Refinement Properties 87

13 Gateway: Types 89

14 Gateway: Specification 89

15 Gateway: Verification 94
15.1 Properties of the defined data types 94
15.2 Properties of the Delay component 96
15.3 Properties of the Loss component 98
15.4 Properties of the composition of Delay and Loss components 100
15.5 Auxiliary Lemmas 100

15.6 Properties of the ServiceCenter component 122
15.7 General properties of stream values 122
15.8 Properties of the Gateway 126
15.9 Proof of the Refinement Relation for the Gateway Requirements 134
15.10 Lemmas about Gateway Requirements 134
15.11 Properties of the Gateway System 135
15.12 Proof of the Refinement for the Gateway System 141

1 Introduction

The set of theories presented in this paper is an extended and updated Isabelle/HOL+Isar [7, 15] formalisation of stream processing components elaborated within the methodology "FOCUS on Isabelle" [12]. This paper is organised as follows: in the first section we give a general introduction to the FOCUS stream processing components [2] and briefly describe three case studies to show how the formalisation can be used for specification and verification of system properties applying the idea of refinement-based verification [11]. After that we present the Isabelle/HOL representation of these concepts and a number of auxiliary theories on lists and natural numbers useful for the proofs in the case studies. The last three sections introduce the case studies, where system properties are verified formally using the Isabelle theorem prover.

This approach can be used as a basis for the abstract modelling level within the development of cyber-physical systems, suggested in our other work [9, 8].

1.1 Stream processing components

The central concept in FOCUS is a *stream* representing a communication history of a *directed channel* between components. A system in FOCUS is specified by its components that are connected by channels, and are described in terms of its input/output behavior. The channels in this specification framework are *asynchronous communication links* without delays. They are *directed* and generally assumed to be *reliable*, and *order preserving*. Via these channels components exchange information in terms of *messages* of specified types. For any set of messages M, M^∞ and M^* denote the sets of all infinite and all finite untimed streams respectively:

$$M^\infty \stackrel{\text{def}}{=} \mathbb{N}_+ \to M \qquad M^* \stackrel{\text{def}}{=} \cup_{n\in\mathbb{N}}([1..n] \to M)$$

A *timed stream*, as suggested in our previous work [12], is represented by a sequence of *time intervals* counted from 0, each of them is a finite sequence of messages that are listed in their order of transmission:

$$M^{\infty\!\!*} \stackrel{\text{def}}{=} \mathbb{N}_+ \to M^* \qquad M^{*\!*} \stackrel{\text{def}}{=} \cup_{n\in\mathbb{N}}([1..n] \to M^*)$$

A specification can be elementary or composite – composite specifications are built hierarchically from the elementary ones. Any specification characterises the relation between the *communication histories* for the external *input* and *output channels*: the formal meaning of a specification is exactly the *input/output relation*. This is specified by the lists of input and output channel identifiers, I and O, while the syntactic interface of the specification S is denoted by $(I_S \rhd O_S)$.

To specify the behaviour of a real-time system we use *infinite timed streams* to represent the input and the output streams. The type of *finite timed streams* will be used only if some argumentation about a timed stream that was truncated at some point of time is needed. The type of *finite untimed streams* will be used to argue about a sequence of messages that are transmitted during a time interval. The type of *infinite untimed streams* will be used in the case of timed specifications only to represent local variables of FOCUS specification. Our definition in Isabelle/HOL of corresponding types is given below:

- Finite timed streams of type *'a* are represented by the type *'a fstream*, which is an abbreviation for the type *'a list list*.
- Finite untimed streams of type *'a* are represented by the list type: *'a list*.
- Infinite timed streams of type *'a* are represented by the type *'a istream*, which represents the functional type *nat* ⇒ *'a list*.
- Infinite untimed streams of type *'a* are represented by the functional type *nat* ⇒ *'a*.

All the operators defined in the presented theories are based on the standard Isabelle/HOL library.

1.2 Case Study 1: Steam Boiler System

A steam boiler control system can be represent as a distributed system consisting of a number of communicating components and must fulfil real time requirements. This case study shows how we can deal with local variables (system's states) and in which way we can represent mutually recursive functions to avoid problems in proofs. The main idea of the steam boiler specification was taken from [2]: The steam boiler has a water tank, which contains a number of gallons of water, and a pump, which adds 10 gallons of water per time unit to its water tank, if the pump is on. At most 10 gallons of water are consumed per time unit by the steam production, if the pump is off. The steam boiler has a sensor that measures the water level.

We specified the following components: *ControlSystem* (general requirements specification), *ControlSystemArch* (system architecture), *SteamBoiler*, *Converter*, and *Controller*. We present here the following Isabelle/HOL theories for this system:

- *SteamBoiler.thy* – specifications of the system components,
- *SteamBoiler_proof* – proof of refinement relation between the requirements and the architecture specifications.

The specification *ControlSystem* describes the requirements for the steam boiler system: in each time interval the system outputs it current water level in gallons and this level should always be between 200 and 800 gallons (the system works in the time-synchronous manner).

The specification *ControlSystemArch* describes a general architecture of the steam boiler system. The system consists of three components: a steam boiler, a converter, and a controller.

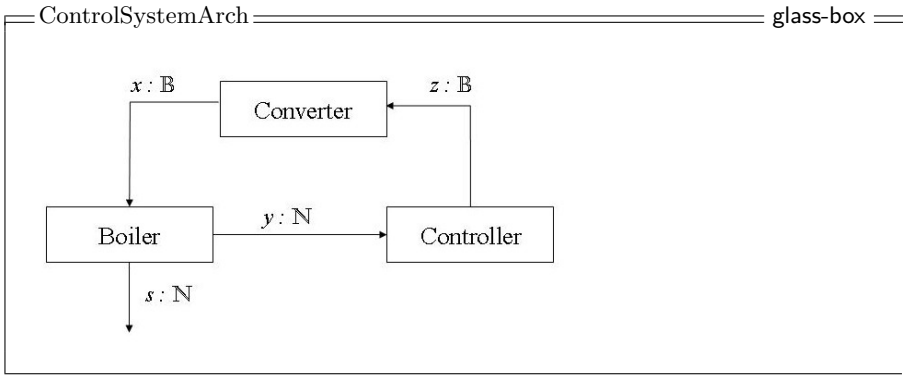

The *SteamBoiler* component works in time-synchronous manner: the current water level is controlled every time interval. The boiler has two output channels with equal streams ($y = s$) and it fixes the initial water level to be 500 gallons. For every point of time the following must be true: if the pump is off, the boiler consumes at most 10 gallons of water, otherwise (the pump is on) at most 10 gallons of water will be added to its water tank.

The *Converter* component converts the asynchronous output produced by the controller to time-synchronous input for the steam boiler. Initially the pump is off, and at every later point of time (from receiving the first instruction from the controller) the output will be the last input from the controller. The *Controller* component, contrary to the steam boiler component, behaves in a purely asynchronous manner to keep the number of control signals small, it means it might not be desirable to switch the pump on and off more often than necessary. The controller is responsible for switching the steam boiler pump on and off. If the pump is off: if the current water level is above 300 gallons the pump stays off, otherwise the pump is started and will run until the water level reaches 700 gallons. If the pump is on: if the current water level is below 700 gallons the pump stays on, otherwise the pump is turned off and will be off until the water level reaches 300 gallons.

To show that the specified system fulfills the requirements we need to show that the specification *ControlSystemArch* is a refinement of the specification *ControlSystem*. It follows from the definition of behavioral refinement (cf. [1]) that in order to verify that $ControlSystem \rightsquigarrow ControlSystemArch$ it is enough to prove that

$$[\![ControlSystemArch]\!] \Rightarrow [\![ControlSystem]\!]$$

Therefore, we have to prove a *lemma* that says the specification *ControlSystemArch* is a refinement of the specification *ControlSystem*:

lemma *L0-ControlSystem*: $[\![\ ControlSystemArch\ s]\!] \Longrightarrow ControlSystem\ s$

1.3 Case Study 2: FlexRay Communication Protocol

In this section we present a case study on FlexRay, communication protocol for safety-critical real-time applications. This protocol has been developed by the FlexRay Consortium [3] for embedded systems in vehicles, and its advantages are deterministic real-time message transmission, fault tolerance, integrated functionality for clock synchronisation and higher bandwidth.

FlexRay contains a set of complex algorithms to provide the communication services. From the view of the software layers above FlexRay only a few of these properties become visible. The most important ones are static cyclic communication schedules and system-wide synchronous clocks. These provide a suitable platform for distributed control algorithms as used e.g. in drive-by-wire applications. The formalization described here is based on the "Protocol Specification 2.0"[4].

The static message transmission model of FlexRay is based on *rounds*. FlexRay rounds consist of a constant number of time slices of the same length, so called *slots*. A node can broadcast its messages to other nodes at statically defined slots. At most one node can do it during any slot.

For the formalisation of FlexRay in FOCUS we would like to refer to [5, 13, 6]. To reduce the complexity of the system several aspects of FlexRay have been abstracted in this formalisation:

(1) There is no clock synchronization or start-up phase since clocks are assumed to be synchronous. This corresponds very well with the *time-synchronous* notion of FOCUS.

(2) The model does not contain bus guardians that protect channels on the physical layer from interference caused by communication that is not aligned with FlexRay schedules.

(3) Only the static segment of the communication cycle has been included not the dynamic, as we are mainly interested in time-triggered systems.

(4) The time-basis for the system is one slot i.e. one slot FlexRay corresponds to one tick in in the formalisation.

(5) The system contains only one FlexRay channel. Adding a second channel would mean simply doubling the FlexRay component with a different configuration and adding extra channels for the access to the *CNI_Buffer* component.

The system architecture consists of the following components, which describe the FlexRay components accordingly to the FlexRay standard [4]:

- *FlexRay* (general requirements specification),
- *FlexRayArch* (system architecture),
- *FlexRayArchitecture* (guarantee part of the system architecture),
- *Cable*,
- *Controller*,
- *Scheduler*, and
- *BusInterface*.

We present the following Isabelle/HOL theories in this case study:

- *FR_types.thy* – datatype definitions,
- *FR.thy* – specifications of the system components and auxiliary functions and predicates,
- *FR_proof* – proof of refinement relation between the requirements and the architecture specifications.

The type *Frame* that describes a FlexRay frame consists of a slot identifier of type $\mathbb{N}$ and the payload. The type of payload is defined as a finite list of type *Message*. The type *Config* represents the bus configuration and contains the scheduling table *schedule* of a node and the length of the communication round *cycleLength*. A scheduling table of a node consists of a number of slots in which this node should be sending a frame with the corresponding identifier (identifier that is equal to the slot).

$$\begin{aligned}
&\mathsf{type}\ \mathit{Message} &&= \mathit{msg}\ (\mathit{message_id} : \mathbb{N}, \mathit{ftcdata} : \mathit{Data})\\
&\mathsf{type}\ \mathit{Frame} &&= \mathit{frm}\ (\mathit{slot} : \mathbb{N}, \mathit{data} : \mathit{Data})\\
&\mathsf{type}\ \mathit{Config} &&= \mathit{conf}\ (\mathit{schedule} : \mathbb{N}^*, \mathit{cycleLength} : \mathbb{N})
\end{aligned}$$

We do not specify the type *Data* here to have a polymorphic specification of FlexRay (this type can be underspecified later to any datatype), therefore, in Isabelle/HOL it will be also defined as a polymorphic type $'a$. The types $'a$ *nFrame*, *nNat* and *nConfig* are used to represent sheaves of channels of types *Frame*, $\mathbb{N}$ and *Config* respectively. In the specification group will be used channels *recv* and *activations*, as well as sheaves of channels ($return_1$, ...,$return_n$), ($c_1, \ldots, c_n$), ($store_1, \ldots, store_n$), ($get_1, \ldots, get_n$), and ($send_1, \ldots, send_n$). We also need to declare some constant, *sN*, for the number of specification replication and the corresponding number of channels in sheaves, as well as to define the list of sheaf upper bounds, *sheafNumbers*.

The architecture of the FlexRay communication protocol is specified as the FOCUS specification *FlexRayArch*. Its assumption-part consists of three constraints: (i) all bus configurations have disjoint scheduling tables, (ii) all bus configurations have the equal length of the communication round, (iii) each FlexRay controller can receive tab most one data frame each time interval from the environment' of the FlexRay system. The guarantee-part

of *FlexRayArch* is represented by the specification *FlexRayArchitecture* (see below).

FlexRayArch (constant $c_1, ..., c_n \in$ Config) — timed

in $return_1, ..., return_n : Frame$

out $store_1, ..., store_n : Frame;\ get_1, ..., get_n : \mathbb{N}$

asm $\forall\, i \in [1..n] : \mathsf{msg}_1(return_i)$

$DisjointSchedules(c_1, \ldots, c_n)$

$IdenticCycleLength(c_1, \ldots, c_n)$

gar $(store_1, \ldots, store_n, get_1, \ldots, get_n) :=$

$FlexRayArchitecture(c_1, \ldots, c_n)(return_1, dots, return_n)$

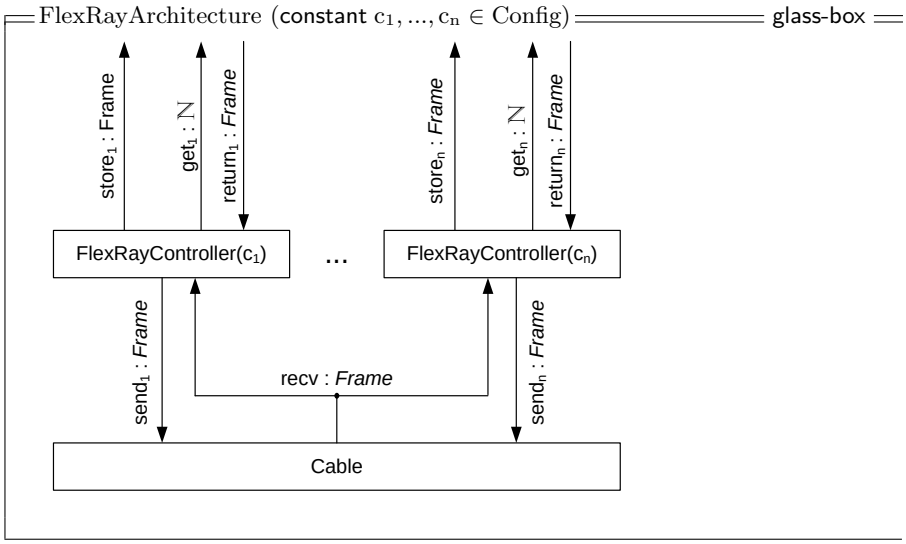

The component *Cable* simulate the broadcast properties of the physical network cable – every received FlexRay frame is resent to all connected nodes. Thus, if one *FlexRayController* send some frame, this frame will be resent to all nodes (to all *FlexRayController*s of the system). The assumption is that all input streams of the component *Cable* are disjoint – this holds by the properties of the *FlexRayController* components and the overall system assumption that the scheduling tables of all nodes are disjoint. The guarantee is specified by the predicate *Broadcast*.

The FOCUS specification *FlexRayController* represent the controller component for a single node of the system. It consists of the components *Scheduler* and *BusInterface*. The *Scheduler* signals the *BusInterface*, that is responsible for the interaction with other nodes of the system (i.e. for the real send and receive of frames), on which time which FlexRay frames must be

send from the node. The *Scheduler* describes the communication scheduler. It sends at every time t interval, which is equal modulo the length of the communication cycle to some FlexRay frame identifier (that corresponds to the number of the slot in the communication round) from the scheduler table, this frame identifier.

The specification *FlexRay* represents requirements on the protocol: If the scheduling tables are correct in terms of the predicates *DisjointSchedules* (all bus configurations have disjoint scheduling tables) and *IdenticCycleLength* (all bus configurations have the equal length of the communication round), and also the FlexRay component receives in every time interval at most one message from each node (via channels $return_i$, $1 \leq i \leq n$), then

- the frame transmission by FlexRay must be correct in terms of the predicate *FrameTransmission*: if the time t is equal modulo the length of the cycle (FlexRay communication round) to the element of the scheduler table of the node k, then this and only this node can send a data atn the tth time interval;
- FlexRay component sends in every time interval at most one message to each node via channels get_i and $store_i$, $1 \leq i \leq n$).

To show that the specified system fulfill the requirements we need to show that the specification *FlexRayArch* is a refinement of the specification *FlexRay*. It follows from the definition of behavioral refinement that in order to verify that $FlexRay \rightsquigarrow FlexRayArch$ it is enough to prove that

$$[\![FlexRayArch]\!] \Rightarrow [\![FlexRay]\!]$$

Therefore, we have to define and to prove a lemma, that says the specification *FlexRayArch* is a refinement of the specification *FlexRay*:

lemma *main-fr-refinement*:
FlexRayArch n nReturn nC nStore nGet $\Longrightarrow$ *FlexRay n nReturn nC nStore nGet*

1.4 Case Study 3: Automotive-Gateway

This section introduces the case study on telematics (electronic data transmission) gateway that was done for the Verisoft project[14]. If the gateway receives from a ECall application of a vehicle a signal about crash (more precise, the command to initiate the call to the Emergency Service Center, ESC), and after the establishing the connection it receives the command to send the crash data, received from sensors. These data are restored in the internal buffer of the gateway and should be resent to the ESC and the voice communication will be established, assuming that there is no connection fails. The system description consists of the following specifications:

- *GatewaySystem* (gateway system architecture),
- *GatewaySystemReq* (gateway system requirements),
- *ServiceCenter* (Emergency Service Center),
- *Gateway* (gateway architecture),
- *GatewayReq* (gateway requirements),
- *Sample* (the main component describing its logic),
- *Delay* (the component modelling the communication delay), and
- *Loss* (the component modelling the communication loss).

We present the following Isabelle/HOL theories in this case study:

- *Gateway_types.thy* – datatype definitions,
- *Gateway.thy* – specifications of the system components,
- *Gateway_proof* – proofs of refinement relations between the requirements and the architecture specifications (for the components *Gateway* and *GatewaySystem*).

The datatype *ECall_Info* represents a tuple, consisting of the data that the Emergency Service Center needs – here we specify these data to contain the vehicle coordinates and the collision speed, they can also extend by some other information. The datatype *GatewayStatus* represents the status (internal state) of the gateway.

$$
\begin{aligned}
&\textsf{type } \mathit{Coordinates} &&= \mathbb{N} \times \mathbb{N} \\
&\textsf{type } \mathit{CollisionSpeed} &&= \mathbb{N} \\
&\textsf{type } \mathit{ECall_Info} &&= \mathit{ecall}(\mathit{coord} \in \mathit{Coordinates}, \mathit{speed} \in \mathit{CollisionSpeed}) \\
&\textsf{type } \mathit{GatewayStatus} &&= \{\ \mathit{init_state},\ \mathit{call},\ \mathit{connection_ok}, \\
& && \quad \mathit{sending_data},\ \mathit{voice_com}\ \}
\end{aligned}
$$

To specify the automotive gateway we will use a number of datatypes consisting of one or two elements: $\{init, send\}$, $\{stop_vc\}$, $\{vc_com\}$ and $\{sc_ack\}$. We name these types *reqType*, *stopType*, *vcType* and *aType* correspondingly.

The FOCUS specification of the general gateway system architecture is presented below:

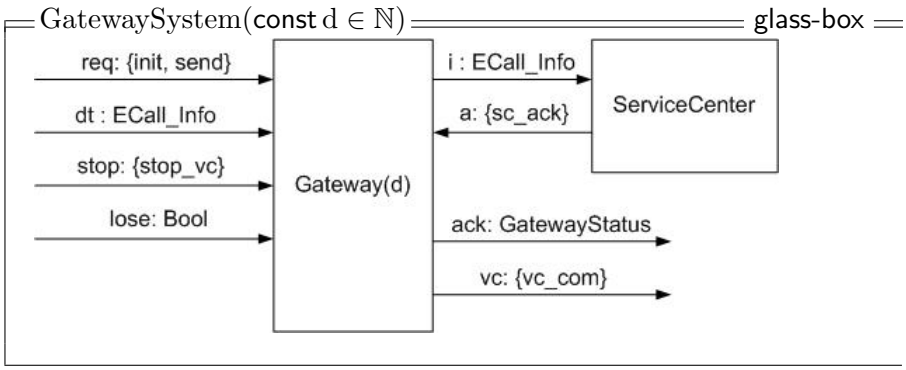

The stream *loss* is specified to be a time-synchronous one (exactly one message each time interval). It represents the connection status: the message true at the time interval t corresponds to the connection failure at this time interval, the message false at the time interval t means that at this time interval no data loss on the gateway connection.

The specification *GatewaySystemReq* specifies the requirements for the component *GatewaySystem*: Assuming that the input streams *req* and *stop* can contain at every time interval at most one message, and assuming that the stream *lose* contains at every time interval exactly one message. If

- at any time interval t the gateway system is in the initial state,
- at time interval $t+1$ the signal about crash comes at first time (more precise, the command to initiate the call to the ESC,
- after $3+m$ time intervals the command to send the crash data comes at first time,
- the gateway system has received until the time interval $t+2$ the crash data,
- there is no connection fails from the time interval t until the time interval $t+4+k+2d$,

then at time interval $t+4+k+2d$ the voice communication is established.

The component *ServiceCenter* represents the interface behaviour of the ESC (wrt. connection to the gateway): if at time t a message about a vehicle crash comes, it acknowledges this event by sending the at time $t+1$ message *sc_ack* that represents the attempt to establish the voice communication with the driver or a passenger of the vehicle. if there is no connection failure, after d time intervals the voice communication will be started.

We specify the gateway requirements (*GatewayReq*) as follows:

1. If at time t the gateway is in the initial state *init_state*, and it gets the command to establish the connection with the central station, and also there is no environment connection problems during the next 2 time intervals, it establishes the connection at the time interval $t+2$.

2. If at time t the gateway has establish the connection, and it gets the command to send the ECall data to the central station, and also there is no environment connection problems during the next $d+1$ time intervals, then it sends the last corresponding data. The central station becomes these date at the time $t+d$.

3. If the gateway becomes the acknowledgment from the central station that it has receives the sent ECall data, and also there is no environment connection problems, then the voice communication is started.

The specification of the gateway architecture, *Gateway*, is parameterised one: the parameter $d \in \mathbb{N}$ denotes the communication delay between the

central station and a vehicle. This component consists of three subcomponents: *Sample*, *Delay*, and *Loss*:

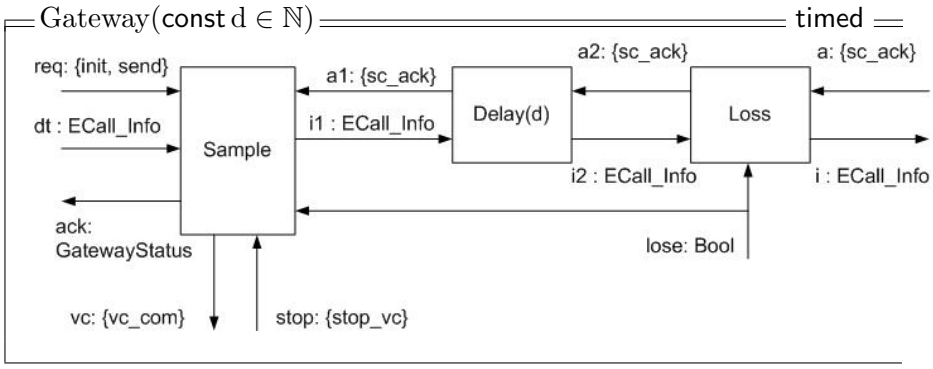

The component *Delay* models the communication delay. Its specification is parameterised one: it inherits the parameter of the component *Gateway*. This component simply delays all input messages on d time intervals. During the first d time intervals no output message will be produced.

The component *Loss* models the communication loss between the central station and the vehicle gateway: if during time interval t from the component *Loss* no message about a lost connection comes, the messages come during time interval t via the input channels a and $i2$ will be forwarded without any delay via channels $a2$ and i respectively. Otherwise all messages come during time interval t will be lost.

The component *Sample* represents the logic of the gateway component. If it receives from a ECall application of a vehicle the command to initiate the call to the ESC it tries to establish the connection. If the connection is established, and the component *Sample* receives from a ECall application of a vehicle the command to send the crash data, which were already received and stored in the internal buffer of the gateway, these data will be resent to the ESC. After that this component waits to the acknowledgment from the ESC. If the acknowledgment is received, the voice communication will be established, assuming that there is no connection fails.

For the component *Sample* we have the assumption, that the streams *req*, $a1$, and *stop* can contain at every time interval at most one message, and also that the stream *loss* must contain at every time interval exactly one message. This component uses local variables *st* and *buffer* (more precisely, a local variable *buffer* and a state variable *st*). The guarantee part of the component *Sample* can be specified as a timed state transition diagram (TSTS, cf. also [10]) and an expression which says how the local variable *buffer* is computed, or using the corresponding table representation, which is semantically equivalent to the TSTD.

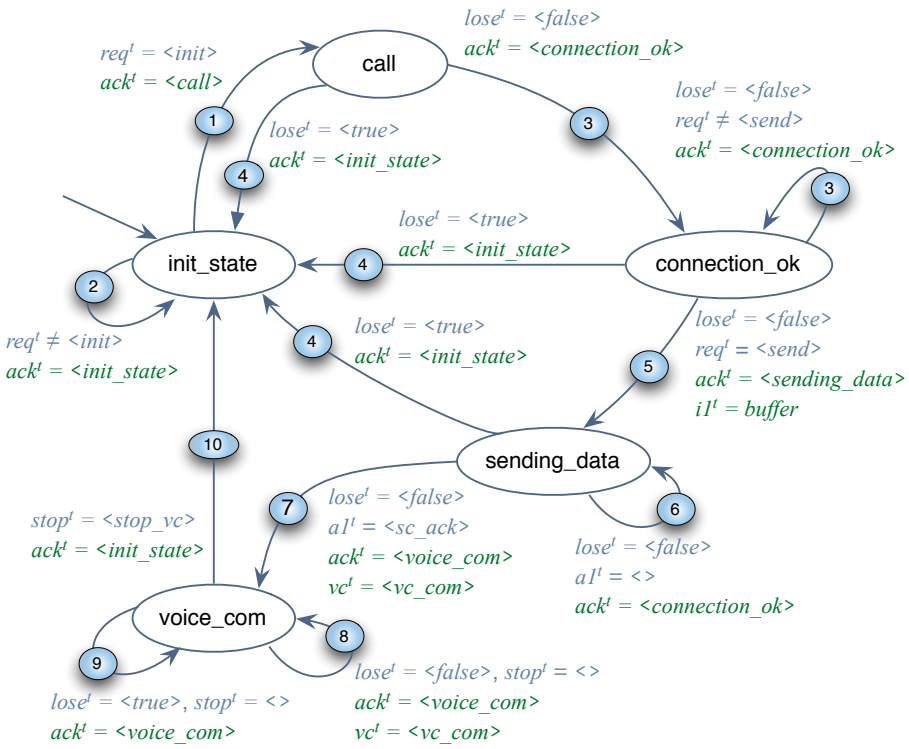

Figure 1: Timed state transition diagram for the component Sample

To show that the specified gateway architecture fulfils the requirements we need to show that the specification *Gateway* is a refinement of the specification *GatewayReq*. Therefore, we need to define and to prove the following lemma:

lemma *Gateway-L0*:
Gateway req dt a stop lose d ack i vc
$\Longrightarrow$ *GatewayReq req dt a stop lose d ack i vc*

To show that the specified gateway architecture fulfills the requirements we need to show that the specification *GatewaySystem* is a refinement of the specification *GatewaySystemReq*. Therefore, we need to define and to prove the following lemma:

lemma *GatewaySystem-L0*:
GatewaySystem req dt stop lose d ack vc
$\Longrightarrow$ *GatewaySystemReq req dt stop lose d ack vc*

2 Theory ArithExtras.thy

theory *ArithExtras*
imports *Main*
begin

datatype *natInf* = *Fin nat*
| *Infty* (∞)
primrec
nat2inat :: *nat list* ⇒ *natInf list*
where
nat2inat [] = [] |
nat2inat (*x*#*xs*) = (*Fin x*) # (*nat2inat xs*)

end

3 Auxiliary Theory ListExtras.thy

theory *ListExtras*
imports *Main*
begin

definition
disjoint :: *'a list* ⇒ *'a list* ⇒ *bool*
where
disjoint x y ≡ (*set x*) ∩ (*set y*) = {}

primrec
mem :: *'a* ⇒ *'a list* ⇒ *bool* (**infixr** *mem 65*)
where
x mem [] = *False* |
x mem (*y* # *l*) = ((*x* = *y*) ∨ (*x mem l*))

definition
memS :: *'a* ⇒ *'a list* ⇒ *bool*
where
memS x l ≡ *x* ∈ (*set l*)

lemma *mem-memS-eq*: *x mem l* ≡ *memS x l*
proof (*induct l*)
case *Nil*
from *this* **show** *?case*
by (*simp add*: *memS-def*)
next
fix *a la* **case** (*Cons a la*)
from *Cons* **show** *?case*
by (*simp add*: *memS-def*)
qed

lemma *mem-set-1*:
  assumes *h1*:*a mem l*
  shows *a* ∈ *set l*
using *assms*
proof (*induct l*)
  case *Nil*
  from *this* **show** *?case*
  by *auto*
next
  fix *a la* **case** (*Cons a la*)
  from *Cons* **show** *?case*
  by *auto*
qed

lemma *mem-set-2*:
  assumes *h1*:*a* ∈ *set l*
  shows *a mem l*
using *assms*
proof (*induct l*)
  case *Nil*
  from *this* **show** *?case*
  by *auto*
next
  fix *a la* **case** (*Cons a la*)
  from *Cons* **show** *?case*
  by *auto*
qed

lemma *set-inter-mem*:
  assumes *h1*:*x mem l1*
      and *h2*:*x mem l2*
  shows *set l1* ∩ *set l2* ≠ {}
using *assms*
proof (*induct l1*)
  case *Nil*
  from *this* **show** *?case*
  by *auto*
next
  fix *a la* **case** (*Cons a la*)
  from *Cons* **show** *?case*
  by (*auto*, *simp add*: *mem-set-1*)
 qed

lemma *mem-notdisjoint*:
  assumes *h1*:*x mem l1*
      and *h2*:*x mem l2*
  shows ¬ *disjoint l1 l2*

```
proof
  assume sg0:disjoint l1 l2
  from h1 and h2 have  sg1:set l1 ∩ set l2 ≠ {}
    by (simp add: set-inter-mem)
  from h1 and h2 and sg1 and sg0 show False
   by (simp add: disjoint-def)
qed

lemma mem-notdisjoint2:
  assumes h1:disjoint (schedule A) (schedule B)
      and h2:x mem schedule A
  shows ¬ x mem schedule B
proof −
  { assume a1: x mem schedule B
    from h2 and a1 have sg1:¬  disjoint (schedule A) (schedule B)
      by (simp add: mem-notdisjoint)
    from h1 and sg1 have False by simp
   } from this have sg2:¬ x mem schedule B by blast
  from this show ?thesis by simp
qed

lemma Add-Less:
  assumes 0 < b
  shows (Suc a − b < Suc a) = True
using assms by arith

lemma list-length-hint1:
  assumes l ~= []
  shows 0 < length l
using assms by simp
lemma list-length-hint1a:
  assumes l ~= []
  shows 0 < length l
using assms by simp

lemma list-length-hint2:
  assumes h1:length x  = Suc 0
  shows [hd x] = x
using assms
proof (induct x)
  case Nil
  from this show ?case
  by auto
next
  fix a la case (Cons a la)
  from Cons show ?case
  by auto
qed
```

lemma *list-length-hint2a*:
  assumes *h1*:*length l* = *Suc 0*
  shows *tl l* = []
using *assms*
proof (*induct l*)
  case *Nil*
  from *this* **show** *?case*
  by *auto*
next
  fix *a la* **case** (*Cons a la*)
  from *Cons* **show** *?case*
  by *auto*
qed

lemma *list-length-hint3*:
  assumes *length l* = *Suc 0*
  shows *l* ≠ []
using *assms*
proof (*induct l*)
  case *Nil*
  from *this* **show** *?case*
  by *auto*
next
  fix *a la* **case** (*Cons a la*)
  from *Cons* **show** *?case*
  by *auto*
qed

lemma *list-length-hint4*:
  assumes *h1*:*length x* ≤ *Suc 0*
      and *h2*:*x* ≠ []
   shows *length x* = *Suc 0*
using *assms*
proof (*induct x*)
  case *Nil*
  from *this* **show** *?case*
  by *auto*
next
  fix *a la* **case** (*Cons a la*)
  from *Cons* **show** *?case*
  by *auto*
qed

lemma *length-nonempty*:
  assumes *h1*:*x* ≠ []
  shows *Suc 0* ≤ *length x*
using *assms*
proof (*induct x*)
  case *Nil*

from *this* **show** *?case*
by *auto*
next
fix *a la* **case** (*Cons a la*)
from *Cons* **show** *?case*
by *auto*
qed

lemma *last-nth-length*:
assumes $x \neq []$
shows $x\ !\ ((length\ x) - Suc\ 0) = last\ x$
using *assms*
proof (*induct x*)
case *Nil*
from *this* **show** *?case*
by *auto*
next
fix *a la* **case** (*Cons a la*)
from *Cons* **show** *?case*
by *auto*
qed

lemma *list-nth-append0*:
assumes *h1*:$i < length\ x$
shows $x\ !\ i = (x \bullet z)\ !\ i$
proof (*cases i*)
assume *i=0*
with *h1* **show** *?thesis* **by** (*simp add*: *nth-append*)
next
fix *ii* **assume** $i = Suc\ ii$
with *h1* **show** *?thesis* **by** (*simp add*: *nth-append*)
qed

lemma *list-nth-append1*:
assumes *h1*:$i < length\ x$
shows $(b\ \#\ x)\ !\ i = (b\ \#\ x \bullet y)\ !\ i$
proof −
from *h1* **have** *sg1*:$i < length\ (b\ \#\ x)$ **by** *auto*
from *this* **have** *sg2*: $(b\ \#\ x)\ !\ i = ((b\ \#\ x) \bullet y)\ !\ i$
by (*rule list-nth-append0*)
from *this* **show** *?thesis* **by** *simp*
qed

lemma *list-nth-append2*:
assumes *h1*:$i < Suc\ (length\ x)$
shows $(b\ \#\ x)\ !\ i = (b\ \#\ x \bullet a\ \#\ y)\ !\ i$
proof −
from *h1* **have** *sg1*:$i < length\ (b\ \#\ x)$ **by** *auto*
from *this* **have** *sg2*: $(b\ \#\ x)\ !\ i = ((b\ \#\ x) \bullet (a\ \#\ y))\ !\ i$

by (*rule list-nth-append0*)
from *this* **show** *?thesis* **by** *simp*
qed

lemma *list-nth-append3*:
assumes *h1*:¬ *i* < *Suc* (*length x*)
and *h2*:*i* − *Suc* (*length x*) < *Suc* (*length y*)
shows (*a* # *y*) ! (*i* − *Suc* (*length x*)) = (*b* # *x* • *a* # *y*) ! *i*
proof (*cases i*)
assume *i=0*
with *h1* **show** *?thesis* **by** (*simp add*: *nth-append*)
next
fix *ii* **assume** *i* = *Suc ii*
with *h1* **show** *?thesis* **by** (*simp add*: *nth-append*)
qed

lemma *list-nth-append4*:
assumes *h1*:*i* < *Suc* (*length x* + *length y*)
and *h2*:¬ *i* − *Suc* (*length x*) < *Suc* (*length y*)
shows *False*
using *assms* **by** *arith*

lemma *list-nth-append5*:
assumes *h1*:*i* − *length x* < *Suc* (*length y*)
and *h2*:¬ *i* − *Suc* (*length x*) < *Suc* (*length y*)
shows ¬ *i* < *Suc* (*length x* + *length y*)
using *assms* **by** *arith*

lemma *list-nth-append6*:
assumes *h1*:¬ *i* − *length x* < *Suc* (*length y*)
and *h2*:¬ *i* − *Suc* (*length x*) < *Suc* (*length y*)
shows ¬ *i* < *Suc* (*length x* + *length y*)
using *assms* **by** *arith*

lemma *list-nth-append6a*:
assumes *h1*:*i* < *Suc* (*length x* + *length y*)
and *h2*:¬ *i* − *length x* < *Suc* (*length y*)
shows *False*
using *assms* **by** *arith*

lemma *list-nth-append7*:
assumes *h1*:*i* − *length x* < *Suc* (*length y*)
and *h2*:*i* − *Suc* (*length x*) < *Suc* (*length y*)
shows *i* < *Suc* (*Suc* (*length x* + *length y*))
using *assms* **by** *arith*

lemma *list-nth-append8*:
assumes *h1*:¬ *i* < *Suc* (*length x* + *length y*)
and *h2*:*i* < *Suc* (*Suc* (*length x* + *length y*))

shows $i = Suc\ (length\ x + length\ y)$
using *assms* **by** *arith*

lemma *list-nth-append9*:
assumes *h1*:$i - Suc\ (length\ x) < Suc\ (length\ y)$
shows $i < Suc\ (Suc\ (length\ x + length\ y))$
using *assms* **by** *arith*

lemma *list-nth-append10*:
assumes *h1*:$\neg\ i < Suc\ (length\ x)$
and *h2*:$\neg\ i - Suc\ (length\ x) < Suc\ (length\ y)$
shows $\neg\ i < Suc\ (Suc\ (length\ x + length\ y))$
using *assms* **by** *arith*

end

4 Auxiliary arithmetic lemmas

theory *arith-hints*
imports *Main*
begin

lemma *arith-mod-neq*:
assumes *h1*:$a\ mod\ n \neq b\ mod\ n$
shows $a \neq b$
using *assms* **by** *auto*

lemma *arith-mod-nzero*:
fixes i::*nat*
assumes *h1*: $i < n$
and *h2*:$0 < i$
shows $0 < (n * t + i)\ mod\ n$
proof −
from *h1* **and** *h2* **have** *sg1*:$(i + n * t)\ mod\ n = i$
by (*simp add*: *mod-mult-self2*)
also have *sg2*:$n * t + i = i + n * t$ **by** *simp*
from *this* **and** *h1* **and** *h2* **show** *?thesis*
by (*simp* (*no-asm-simp*))
qed

lemma *arith-mult-neq-nzero1*:
fixes i::*nat*
assumes *h1*:$i < n$
and *h2*:$0 < i$
shows $i + n * t \neq n * q$
proof −
from *h1* **and** *h2* **have** *sg1*:$(i + n * t)\ mod\ n = i$
by (*simp add*: *mod-mult-self2*)
also have *sg2*:$(n * q)\ mod\ n = 0$ **by** *simp*

```
  from this and h1 and h2 have (i + n * t) mod n ≠ (n * q) mod n
    by simp
  from this show ?thesis  by (rule arith-mod-neq)
qed

lemma arith-mult-neq-nzero2:
  fixes i::nat
  assumes h1:i < n
      and h2:0 < i
  shows n * t + i ≠ n * q
proof −
  from h1 and h2 have i + n * t ≠ n * q
    by (rule arith-mult-neq-nzero1)
  from this show ?thesis by simp
qed

lemma arith-mult-neq-nzero3:
  fixes i::nat
  assumes h1:i < n  and h2:0 < i
  shows n + n * t + i ≠ n * qc
proof −
   from h1 and h2 have sg1: n *(Suc t) + i  ≠ n * qc
     by (rule arith-mult-neq-nzero2)
   have sg2: n + n * t + i = n *(Suc t) + i by simp
   from sg1 and sg2  show ?thesis  by arith
qed

lemma arith-modZero1:
  (t + n * t) mod Suc n = 0
proof −
  have ((Suc n) * t) mod Suc n = 0 by (rule mod-mult-self1-is-0)
  from this show ?thesis by simp
qed

lemma arith-modZero2:
  Suc (n + (t + n * t)) mod Suc n = 0
proof −
  have ((Suc n) * (Suc t)) mod Suc n = 0 by (rule mod-mult-self1-is-0)
  from this show ?thesis by simp
qed

lemma arith1:
  assumes h1:Suc n * t = Suc n * q
  shows t = q
proof −
  have Suc n * t = Suc n * q = (t = q | (Suc n) = (0::nat))
    by (rule mult-cancel1)
  from this and h1 show ?thesis by simp
qed
```

lemma *arith2*:
fixes $t\ n\ q :: nat$
assumes *h1*:$t + n * t = q + n * q$
shows $t = q$
proof −
have *sg1*:$t + n * t = (Suc\ n) * t$ **by** *auto*
have *sg2*:$q + n * q = (Suc\ n) * q$ **by** *auto*
from *h1* **and** *sg1* **and** *sg2* **have** $Suc\ n * t = Suc\ n * q$ **by** *arith*
from *this* **show** *?thesis* **by** (*rule arith1*)
qed

end

5 FOCUS streams: operators and lemmas

theory *stream*
imports *ListExtras ArithExtras*
begin

5.1 Definition of the FOCUS stream types

— Finite timed FOCUS stream
type-synonym *'a fstream* = *'a list list*

— Infinite timed FOCUS stream
type-synonym *'a istream* = $nat \Rightarrow$ *'a list*

— Infinite untimed FOCUS stream
type-synonym *'a iustream* = $nat \Rightarrow$ *'a*

— FOCUS stream (general)
datatype *'a stream* =
FinT 'a fstream — finite timed streams
| *FinU 'a list* — finite untimed streams
| *InfT 'a istream* — infinite timed streams
| *InfU 'a iustream* — infinite untimed streams

5.2 Definitions of operators

— domain of an infinite untimed stream
definition
infU-dom :: *natInf set*
where
infU-dom $\equiv \{x.\ \exists\ i.\ x = (Fin\ i)\} \cup \{\infty\}$

— domain of a finite untimed stream (using natural numbers enriched by Infinity)
definition
finU-dom-natInf :: *'a list* $\Rightarrow$ *natInf set*

where
finU-dom-natInf $s \equiv \{x.\ \exists\ i.\ x = (Fin\ i) \wedge i < (length\ s)\}$

— domain of a finite untimed stream
primrec
finU-dom :: *'a list* ⇒ *nat set*
where
finU-dom [] = {} |
finU-dom $(x\#xs) = \{length\ xs\} \cup (finU\text{-}dom\ xs)$

— range of a finite timed stream
primrec
finT-range :: *'a fstream* ⇒ *'a set*
where
finT-range [] = {} |
finT-range $(x\#xs) = (set\ x) \cup finT\text{-}range\ xs$

— range of a finite untimed stream
definition
finU-range :: *'a list* ⇒ *'a set*
where
finU-range $x \equiv set\ x$

— range of an infinite timed stream
definition
infT-range :: *'a istream* ⇒ *'a set*
where
infT-range $s \equiv \{y.\ \exists\ i{::}nat.\ y\ mem\ (s\ i)\}$

— range of a finite untimed stream
definition
infU-range :: (*nat* ⇒ *'a*) ⇒ *'a set*
where
infU-range $s \equiv \{\ y.\ \exists\ i{::}nat.\ y = (s\ i)\ \}$

— range of a (general) stream
definition
stream-range :: *'a stream* ⇒ *'a set*
where
stream-range s ≡ *case s of*
FinT x ⇒ *finT-range x*
| *FinU x* ⇒ *finU-range x*
| *InfT x* ⇒ *infT-range x*
| *InfU x* ⇒ *infU-range x*

— finite timed stream that consists of n empty time intervals
primrec
nticks :: *nat* ⇒ *'a fstream*
where

```
  nticks 0 = [] |
  nticks (Suc i) = [] # (nticks i)
```

— removing the first element from an infinite stream
— in the case of an untimed stream: removing the first data element
— in the case of a timed stream: removing the first time interval

```
definition
   inf-tl :: (nat ⇒ 'a) ⇒ (nat ⇒ 'a)
where
  inf-tl s ≡ (λ i. s (Suc i))
```

— removing i first elements from an infinite stream s
— in the case of an untimed stream: removing i first data elements
— in the case of a timed stream: removing i first time intervals

```
definition
   inf-drop :: nat ⇒ (nat ⇒ 'a) ⇒ (nat ⇒ 'a)
where
  inf-drop i s ≡  λ j. s (i+j)
```

— finding the first nonempty time interval in a finite timed stream

```
primrec
 fin-find1nonemp :: 'a fstream ⇒ 'a list
where
 fin-find1nonemp [] = [] |
 fin-find1nonemp (x#xs) =
    ( if x = []
      then fin-find1nonemp xs
      else x )
```

— finding the first nonempty time interval in an infinite timed stream

```
definition
  inf-find1nonemp :: 'a istream ⇒ 'a list
where
 inf-find1nonemp s
  ≡
  ( if (∃ i. s i ≠ [])
    then s (LEAST i. s i ≠ [])
    else [] )
```

— finding the index of the first nonempty time interval in a finite timed stream

```
primrec
 fin-find1nonemp-index :: 'a fstream ⇒ nat
where
 fin-find1nonemp-index [] = 0 |
 fin-find1nonemp-index (x#xs) =
    ( if x = []
      then Suc (fin-find1nonemp-index xs)
      else 0 )
```

— finding the index of the first nonempty time interval in an infinite timed stream

definition
inf-find1nonemp-index :: *'a istream* ⇒ *nat*
where
inf-find1nonemp-index s
≡
(*if* (∃ *i*. *s i* ≠ [])
then (*LEAST i*. *s i* ≠ [])
else 0)

— length of a finite timed stream: number of data elements in this stream
primrec
fin-length :: *'a fstream* ⇒ *nat*
where
fin-length [] = *0* |
fin-length (*x*#*xs*) = (*length x*) + (*fin-length xs*)

— length of a (general) stream
definition
stream-length :: *'a stream* ⇒ *natInf*
where
stream-length s ≡
case s of
(*FinT x*) ⇒ *Fin* (*fin-length x*)
| (*FinU x*) ⇒ *Fin* (*length x*)
| (*InfT x*) ⇒ ∞
| (*InfU x*) ⇒ ∞

— removing the first k elements from a finite (nonempty) timed stream
primrec
fin-nth :: *'a fstream* ⇒ *nat* ⇒ *'a*
where
fin-nth-Cons:
fin-nth (*hds* # *tls*) *k* =
(*if hds* = []
then fin-nth tls k
else (*if* (*k* < (*length hds*))
then nth hds k
else fin-nth tls (*k* − *length hds*)))

— removing i first data elements from an infinite timed stream s
primrec
inf-nth :: *'a istream* ⇒ *nat* ⇒ *'a*
where
inf-nth s 0 = *hd* (*s* (*LEAST i*.(*s i*) ≠ [])) |
inf-nth s (*Suc k*) =
(*if* ((*Suc k*) < (*length* (*s 0*)))
then (*nth* (*s 0*) (*Suc k*))

```
      else ( if (s 0) = []
             then (inf-nth (inf-tl (inf-drop
                  (LEAST i. (s i) ≠ []) s)) k )
             else inf-nth (inf-tl s) k ))

— removing the first k data elements from a (general) stream
definition
    stream-nth :: 'a stream ⇒ nat ⇒ 'a
where
   stream-nth s k ≡
        case s of (FinT x) ⇒ fin-nth x k
                | (FinU x) ⇒ nth x k
                | (InfT x) ⇒ inf-nth x k
                | (InfU x) ⇒ x k

— prefix of an infinite stream
primrec
  inf-prefix :: 'a list ⇒ (nat ⇒ 'a) ⇒ nat ⇒ bool
where
  inf-prefix [] s k = True |
  inf-prefix (x#xs) s k = ( (x = (s k)) ∧ (inf-prefix xs s (Suc k)) )

— prefix of a finite stream
primrec
  fin-prefix :: 'a list ⇒ 'a list ⇒ bool
where
  fin-prefix [] s = True |
  fin-prefix (x#xs) s =
     (if (s = [])
      then False
      else (x = (hd s)) ∧ (fin-prefix xs s) )

— prefix of a (general) stream
definition
   stream-prefix :: 'a stream ⇒ 'a stream ⇒ bool
where
  stream-prefix p s ≡
   (case p of
       (FinT x) ⇒
       (case s of (FinT y) ⇒  (fin-prefix x y)
                | (FinU y) ⇒ False
                | (InfT y) ⇒ inf-prefix x y 0
                | (InfU y) ⇒ False )
     | (FinU x) ⇒
       (case s of (FinT y) ⇒ False
                | (FinU y) ⇒  (fin-prefix x y)
                | (InfT y) ⇒ False
                | (InfU y) ⇒  inf-prefix x y 0 )
     | (InfT x) ⇒
```

```
      (case s of (FinT y) ⇒ False
               | (FinU y) ⇒ False
               | (InfT y) ⇒ (∀ i. x i = y i)
               | (InfU y) ⇒ False )
   | (InfU x) ⇒
     (case s of (FinT y) ⇒ False
               | (FinU y) ⇒ False
               | (InfT y) ⇒ False
               | (InfU y) ⇒ (∀ i. x i = y i) )  )
```

— truncating a finite stream after the n-th element
primrec
fin-truncate :: *'a list* ⇒ *nat* ⇒ *'a list*
where
fin-truncate [] *n* = [] |
fin-truncate (*x*#*xs*) *i* =
(*case i of 0* ⇒ []
| (*Suc n*) ⇒ *x* # (*fin-truncate xs n*))

— truncating a finite stream after the n-th element
— n is of type of natural numbers enriched by Infinity
definition
fin-truncate-plus :: *'a list* ⇒ *natInf* ⇒ *'a list*
where
fin-truncate-plus s n
≡
case n of (*Fin i*) ⇒ *fin-truncate s i* | ∞ ⇒ *s*

— truncating an infinite stream after the n-th element
primrec
inf-truncate :: (*nat* ⇒ *'a*) ⇒ *nat* ⇒ *'a list*
where
inf-truncate s 0 = [*s 0*] |
inf-truncate s (*Suc k*) = (*inf-truncate s k*) • [*s* (*Suc k*)]

— truncating an infinite stream after the n-th element
— n is of type of natural numbers enriched by Infinity
definition
inf-truncate-plus :: *'a istream* ⇒ *natInf* ⇒ *'a stream*
where
inf-truncate-plus s n
≡
case n of (*Fin i*) ⇒ *FinT* (*inf-truncate s i*)
| ∞ ⇒ *InfT s*

— concatanation of a finite and an infinite stream
definition
fin-inf-append ::
'a list ⇒ (*nat* ⇒ *'a*) ⇒ (*nat* ⇒ *'a*)

where
fin-inf-append us s ≡
(λ *i*. (*if* (*i* < (*length us*))
then (*nth us i*)
else s (*i* − (*length us*))))

— insuring that the infinite timed stream is time-synchronous
definition
ts :: *'a istream* ⇒ *bool*
where
ts s ≡ ∀ *i*. (*length* (*s i*) = *1*)

— insuring that each time interval of an infinite timed stream contains at most n data elements
definition
msg :: *nat* ⇒ *'a istream* ⇒ *bool*
where
msg n s ≡ ∀ *t*. *length* (*s t*) ≤ *n*

— insuring that each time interval of a finite timed stream contains at most n data elements
primrec
fin-msg :: *nat* ⇒ *'a list list* ⇒ *bool*
where
fin-msg n [] = *True* |
fin-msg n (*x*#*xs*) = (((*length x*) ≤ *n*) ∧ (*fin-msg n xs*))

— making a finite timed stream to a finite untimed stream
definition
fin-make-untimed :: *'a fstream* ⇒ *'a list*
where
fin-make-untimed x ≡ *concat x*

— making an infinite timed stream to an infinite untimed stream
— (auxiliary function)
primrec
inf-make-untimed1 :: *'a istream* ⇒ *nat* ⇒ *'a*
where
inf-make-untimed1-0:
inf-make-untimed1 s 0 = *hd* (*s* (*LEAST i*.(*s i*) ≠ [])) |
inf-make-untimed1-Suc:
inf-make-untimed1 s (*Suc k*) =
(*if* ((*Suc k*) < *length* (*s 0*))
then nth (*s 0*) (*Suc k*)
else (*if* (*s 0*) = []
then (*inf-make-untimed1* (*inf-tl* (*inf-drop*
(*LEAST i*. ∀ *j*. *j* < *i* ⟶ (*s j*) = [])
s)) *k*)
else inf-make-untimed1 (*inf-tl s*) *k*))

```
— making an infinite timed stream to an infinite untimed stream
— (main function)
definition
   inf-make-untimed :: 'a istream ⇒ (nat ⇒ 'a)
where
  inf-make-untimed s
   ≡
   λ i. inf-make-untimed1 s i


— making a (general) stream untimed
definition
    make-untimed :: 'a stream  ⇒ 'a stream
where
   make-untimed s ≡
      case s of (FinT x) ⇒ FinU (fin-make-untimed x)
              | (FinU x) ⇒ FinU x
              | (InfT x) ⇒
                (if (∃ i.∀ j. i < j ⟶ (x j) = [])
                 then FinU (fin-make-untimed (inf-truncate x
                                (LEAST i.∀ j. i < j ⟶ (x j) = [])))
                 else InfU (inf-make-untimed x))
              | (InfU x) ⇒ InfU x


— finding the index of the time interval that contains the k-th data element
— defined over a finite timed stream
primrec
  fin-tm :: 'a fstream ⇒ nat ⇒ nat
where
  fin-tm [] k = k |
  fin-tm (x#xs) k =
    (if k = 0
     then 0
     else (if (k ≤ length x)
           then (Suc 0)
           else Suc(fin-tm xs (k − length x))))

— auxiliary lemma for the definition of the truncate operator
lemma inf-tm-hint1:
  assumes i2 = Suc i − length a
      and ¬ Suc i ≤ length a
      and a ≠ []
  shows i2 < Suc i
using assms
by auto
```

— filtering a finite timed stream
definition
finT-filter :: *'a set => 'a fstream => 'a fstream*
where
finT-filter m s ≡ map (λ s. filter (λ y. y ∈ m) s) s

— filtering an infinite timed stream
definition
infT-filter :: *'a set => 'a istream => 'a istream*
where
infT-filter m s ≡ (λi.(filter (λ x. x ∈ m) (s i)))

— removing duplications from a finite timed stream
definition
finT-remdups :: *'a fstream => 'a fstream*
where
finT-remdups s ≡ map (λ s. remdups s) s

— removing duplications from an infinite timed stream
definition
infT-remdups :: *'a istream => 'a istream*
where
infT-remdups s ≡ (λi.(remdups (s i)))

— removing duplications from a time interval of a stream
primrec
fst-remdups :: *'a list ⇒ 'a list*
where
fst-remdups [] = [] |
fst-remdups (x#xs) =
(if xs = []
then [x]
else (if x = (hd xs)
then fst-remdups xs
else (x#xs)))

— time interval operator
definition
ti :: *'a fstream ⇒ nat ⇒ 'a list*
where
ti s i ≡
(if s = [] then [] else (nth s i))

— insuring that a sheaf of channels is correctly defined
definition
CorrectSheaf :: *nat ⇒ bool*
where
CorrectSheaf n ≡ 0 < n

— insuring that all channels in a sheaf are disjunct
— indices in the sheaf are represented using an extra specified set
definition
inf-disjS :: *'b set* ⇒ (*'b* ⇒ *'a istream*) ⇒ *bool*
where
inf-disjS IdSet nS
≡
∀ (*t*::*nat*) *i j*. (*i*:*IdSet*) ∧ (*j*:*IdSet*) ∧
((*nS i*) *t*) ≠ [] ⟶ ((*nS j*) *t*) = []

— insuring that all channels in a sheaf are disjunct
— indices in the sheaf are represented using natural numbers
definition
inf-disj :: *nat* ⇒ (*nat* ⇒ *'a istream*) ⇒ *bool*
where
inf-disj n nS
≡
∀ (*t*::*nat*) (*i*::*nat*) (*j*::*nat*).
i < *n* ∧ *j* < *n* ∧ *i* ≠ *j* ∧ ((*nS i*) *t*) ≠ [] ⟶
((*nS j*) *t*) = []

— taking the prefix of n data elements from a finite timed stream
— (defined over natural numbers)
fun *fin-get-prefix* :: (*'a fstream* × *nat*) ⇒ *'a fstream*
where
fin-get-prefix([], *n*) = [] |
fin-get-prefix(*x*#*xs*, *i*) =
(*if* (*length x*) < *i*
then x # *fin-get-prefix*(*xs*, (*i* − (*length x*)))
else [*take i x*])

— taking the prefix of n data elements from a finite timed stream
— (defined over natural numbers enriched by Infinity)
definition
fin-get-prefix-plus :: *'a fstream* ⇒ *natInf* ⇒ *'a fstream*
where
fin-get-prefix-plus s n
≡
case n of (*Fin i*) ⇒ *fin-get-prefix*(*s*, *i*)
| ∞ ⇒ *s*

— auxiliary lemmas
lemma *length-inf-drop-hint1*:
assumes *s k* ≠ []
shows *length* (*inf-drop k s 0*) ≠ *0*
using *assms*
by (*auto simp*: *inf-drop-def*)

```
lemma length-inf-drop-hint2:
(s 0 ≠ [] ⟶ length (inf-drop 0 s 0) < Suc i
  ⟶ Suc i − length (inf-drop 0 s 0) < Suc i)
  by (simp add: inf-drop-def list-length-hint1)


— taking the prefix of n data elements from an infinite timed stream
— (defined over natural numbers)
fun infT-get-prefix :: ('a istream × nat) ⇒ 'a fstream
where
  infT-get-prefix(s, 0) = []
|
  infT-get-prefix(s, Suc i) =
    ( if (s 0) = []
      then ( if (∀ i. s i = [])
             then []
             else (let
                     k = (LEAST k. s k ≠ [] ∧ (∀ i. i < k ⟶ s i = []));
                     s2 = inf-drop (k+1) s
                   in (if (length (s k)=0)
                       then []
                       else (if (length (s k) < (Suc i))
                             then s k # infT-get-prefix (s2,Suc i − length (s k))
                             else [take (Suc i) (s k)] )))
         )
      else
        (if ((length (s 0)) < (Suc i))
         then (s 0) # infT-get-prefix( inf-drop 1 s, (Suc i) − (length (s 0)))
         else [take (Suc i) (s 0)]
         )
     )


— taking the prefix of n data elements from an infinite untimed stream
— (defined over natural numbers)
primrec
  infU-get-prefix :: (nat ⇒ 'a) ⇒ nat ⇒ 'a list
where
  infU-get-prefix s 0 = [] |
  infU-get-prefix s (Suc i)
        = (infU-get-prefix s i) • [s i]

— taking the prefix of n data elements from an infinite timed stream
— (defined over natural numbers enriched by Infinity)
definition
  infT-get-prefix-plus :: 'a istream ⇒ natInf ⇒ 'a stream
where
```

```
infT-get-prefix-plus s n
  ≡
  case n of (Fin i) ⇒ FinT (infT-get-prefix(s, i))
          | ∞      ⇒ InfT s

— taking the prefix of n data elements from an infinite untimed stream
— (defined over natural numbers enriched by Infinity)
definition
  infU-get-prefix-plus :: (nat ⇒ 'a) ⇒ natInf ⇒ 'a stream
where
 infU-get-prefix-plus s n
  ≡
  case n of (Fin i) ⇒ FinU (infU-get-prefix s i)
          | ∞      ⇒ InfU s

— taking the prefix of n data elements from an infinite stream
— (defined over natural numbers enriched by Infinity)
definition
  take-plus :: natInf ⇒ 'a list ⇒ 'a list
where
 take-plus n s
  ≡
  case n of (Fin i) ⇒ (take i s)
          | ∞      ⇒ s

— taking the prefix of n data elements from a (general) stream
— (defined over natural numbers enriched by Infinity)
definition
   get-prefix :: 'a stream ⇒ natInf ⇒ 'a stream
where
   get-prefix s k ≡
       case s of (FinT x) ⇒ FinT (fin-get-prefix-plus x k)
                | (FinU x) ⇒ FinU (take-plus k x)
                | (InfT x) ⇒ infT-get-prefix-plus x k
                | (InfU x) ⇒ infU-get-prefix-plus x k

— merging time intervals of two finite timed streams
primrec
   fin-merge-ti :: 'a fstream ⇒ 'a fstream ⇒ 'a fstream
where
 fin-merge-ti [] y = y |
 fin-merge-ti (x#xs) y =
    ( case y of [] ⇒ (x#xs)
        | (z#zs) ⇒ (x•z) # (fin-merge-ti xs zs))

— merging time intervals of two infinite timed streams
definition
 inf-merge-ti :: 'a istream ⇒ 'a istream ⇒ 'a istream
where
```

inf-merge-ti x y
≡
λ *i*. (*x i*)•(*y i*)

— the last time interval of a finite timed stream
primrec
fin-last-ti :: ('*a list*) *list* ⇒ *nat* ⇒ '*a list*
where
fin-last-ti s 0 = *hd s* |
fin-last-ti s (*Suc i*) =
(*if s*!(*Suc i*) ≠ []
then s!(*Suc i*)
else fin-last-ti s i)

— the last nonempty time interval of a finite timed stream
— (can be applied to the streams which time intervals are empty from some moment)
primrec
inf-last-ti :: '*a istream* ⇒ *nat* ⇒ '*a list*
where
inf-last-ti s 0 = *s 0* |
inf-last-ti s (*Suc i*) =
(*if s* (*Suc i*) ≠ []
then s (*Suc i*)
else inf-last-ti s i)

5.3 Properties of operators

lemma *inf-last-ti-nonempty-k*:
assumes *inf-last-ti dt t* ≠ []
shows *inf-last-ti dt* (*t* + *k*) ≠ []
using *assms* **by** (*induct k*, *auto*)

lemma *inf-last-ti-nonempty*:
assumes *s t* ≠ []
shows *inf-last-ti s* (*t* + *k*) ≠ []
using *assms* **by** (*induct k*, *auto*, *induct t*, *auto*)

lemma *arith-sum-t2k*:
t + *2* + *k* = (*Suc t*) + (*Suc k*)
by *arith*

lemma *inf-last-ti-Suc2*:
assumes *h1*:*dt* (*Suc t*) ≠ [] ∨ *dt* (*Suc* (*Suc t*)) ≠ []
shows *inf-last-ti dt* (*t* + *2* + *k*) ≠ []
proof (*cases dt* (*Suc t*) ≠ [])
assume *a1*:*dt* (*Suc t*) ≠ []
from *a1* **have** *sg2*:*inf-last-ti dt* ((*Suc t*) + (*Suc k*)) ≠ []

by (*rule inf-last-ti-nonempty*)
from *sg2* **show** *?thesis* **by** (*simp add*: *arith-sum-t2k*)
next
assume *a2*:¬ *dt* (*Suc t*) ≠ []
from *a2* **and** *h1* **have** *sg1*:*dt* (*Suc* (*Suc t*)) ≠ [] **by** *simp*
from *sg1* **have** *sg2*:*inf-last-ti dt* (*Suc* (*Suc t*) + *k*) ≠ []
by (*rule inf-last-ti-nonempty*)
from *sg2* **show** *?thesis* **by** *auto*
qed

5.3.1 Lemmas for concatenation operator

lemma *fin-length-append*:
fin-length (*x*•*y*) = (*fin-length x*) + (*fin-length y*)
by (*induct x*, *auto*)

lemma *fin-append-Nil*:
fin-inf-append [] *z* = *z*
by (*simp add*: *fin-inf-append-def*)

lemma *correct-fin-inf-append1*:
assumes *s1* = *fin-inf-append* [*x*] *s*
shows *s1* (*Suc i*) = *s i*
using *assms* **by** (*simp add*: *fin-inf-append-def*)

lemma *correct-fin-inf-append2*:
fin-inf-append [*x*] *s* (*Suc i*) = *s i*
by (*simp add*: *fin-inf-append-def*)

lemma *fin-append-com-Nil1*:
fin-inf-append [] (*fin-inf-append y z*)
= *fin-inf-append* ([] • *y*) *z*
by (*simp add*: *fin-append-Nil*)

lemma *fin-append-com-Nil2*:
fin-inf-append x (*fin-inf-append* [] *z*) = *fin-inf-append* (*x* • []) *z*
by (*simp add*: *fin-append-Nil*)

lemma *fin-append-com-i*:
fin-inf-append x (*fin-inf-append y z*) *i* = *fin-inf-append* (*x* • *y*) *z i*
proof (*cases x*)
assume *Nil*:*x* = []
thus *?thesis* **by** (*simp add*: *fin-append-com-Nil1*)
next
fix *a l* **assume** *Cons*:*x* = *a* # *l*
thus *?thesis*
proof (*cases y*)
assume *y* = []

thus *?thesis* **by** (*simp add*: *fin-append-com-Nil2*)
next
fix *aa la* **assume** *Cons2*:*y* = *aa* # *la*
show *?thesis*
apply (*simp add*: *fin-inf-append-def*, *auto*, *simp add*: *list-nth-append0*)
by (*simp add*: *nth-append*)
qed
qed

5.3.2 Lemmas for operators *ts* and *msg*

lemma *ts-msg1*:
assumes *ts p*
shows *msg 1 p*
using *assms* **by** (*simp add*: *ts-def msg-def*)

lemma *ts-inf-tl*:
assumes *ts x*
shows *ts* (*inf-tl x*)
using *assms* **by** (*simp add*: *ts-def inf-tl-def*)

lemma *ts-length-hint1*:
assumes *h1*:*ts x*
shows *x i* ≠ []
proof −
from *h1* **have** *sg1*:*length* (*x i*) = *Suc 0* **by** (*simp add*: *ts-def*)
thus *?thesis* **by** *auto*
qed

lemma *ts-length-hint2*:
assumes *h1*:*ts x*
shows *length* (*x i*) = *Suc* (*0*::*nat*)
using *assms*
by (*simp add*: *ts-def*)

lemma *ts-Least-0*:
assumes *h1*:*ts x*
shows (*LEAST i*. (*x i*) ≠ []) = (*0*::*nat*)
using *assms*
proof −
from *h1* **have** *sg1*:*x 0* ≠ [] **by** (*rule ts-length-hint1*)
thus *?thesis*
apply (*simp add*: *Least-def*)
by *auto*
qed

lemma *inf-tl-Suc*:
inf-tl x i = *x* (*Suc i*)
by (*simp add*: *inf-tl-def*)

lemma *ts-Least-Suc0*:
assumes *h1*:*ts x*
shows (*LEAST i*. *x* (*Suc i*) ≠ []) = *0*
proof −
from *h1* **have** *sg1*:*x* (*Suc 0*) ≠ [] **by** (*simp add*: *ts-length-hint1*)
thus *?thesis* **by** (*simp add*: *Least-def*, *auto*)
qed

lemma *ts-inf-make-untimed-inf-tl*:
assumes *h1*:*ts x*
shows *inf-make-untimed* (*inf-tl x*) *i* = *inf-make-untimed x* (*Suc i*)
using *assms*
apply (*simp add*: *inf-make-untimed-def*)
proof (*induct i*)
case *0*
from *h1* **show** *?case*
by (*simp add*: *ts-length-hint1 ts-length-hint2*)
next
case (*Suc i*)
from *h1* **show** *?case*
by (*simp add*: *ts-length-hint1 ts-length-hint2*)
qed

lemma *ts-inf-make-untimed1-inf-tl*:
assumes *h1*:*ts x*
shows *inf-make-untimed1* (*inf-tl x*) *i* = *inf-make-untimed1 x* (*Suc i*)
using *assms*
proof (*induct i*)
case *0*
from *h1* **show** *?case*
by (*simp add*: *ts-length-hint1 ts-length-hint2*)
next
case (*Suc i*)
from *h1* **show** *?case*
by (*simp add*: *ts-length-hint1 ts-length-hint2*)
qed

lemma *msg-nonempty1*:
assumes *h1*:*msg* (*Suc 0*) *a* **and** *h2*:*a t* = *aa* # *l*
shows *l* = []
proof −
from *h1* **have** *sg1*:*length* (*a t*) ≤ *Suc 0* **by** (*simp add*: *msg-def*)
from *h2* **and** *sg1* **show** *?thesis* **by** *auto*
qed

lemma *msg-nonempty2*:
assumes *h1*:*msg* (*Suc 0*) *a* **and** *h2*:*a t* $\neq$ []
shows *length* (*a t*) = (*Suc 0*)
proof −
from *h1* **have** *sg1*:*length* (*a t*) $\leq$ *Suc 0* **by** (*simp add*: *msg-def*)
from *h2* **have** *sg2*:*length* (*a t*) $\neq$ *0* **by** *auto*
from *sg1* **and** *sg2* **show** *?thesis* **by** *arith*
qed

5.3.3 Lemmas for *inf_truncate*

lemma *inf-truncate-nonempty*:
assumes *h1*:*z i* $\neq$ []
shows *inf-truncate z i* $\neq$ []
proof (*induct i*)
case *0*
from *h1* **show** *?case* **by** *auto*
next
case (*Suc i*)
from *h1* **show** *?case* **by** *auto*
qed

lemma *concat-inf-truncate-nonempty*:
assumes *h1*: *z i* $\neq$ []
shows *concat* (*inf-truncate z i*) $\neq$ []
using *assms*
proof (*induct i*)
case *0*
thus *?case* **by** *auto*
next
case (*Suc i*)
thus *?case* **by** *auto*
qed

lemma *concat-inf-truncate-nonempty-a*:
assumes *h1*:*z i* = [*a*]
shows *concat* (*inf-truncate z i*) $\neq$ []
using *assms*
proof (*induct i*)
case *0*
thus *?case* **by** *auto*
next
case (*Suc i*)
thus *?case* **by** *auto*
qed

lemma *concat-inf-truncate-nonempty-el*:
assumes *h1*:*z i* ≠ []
shows *concat* (*inf-truncate z i*) ≠ []
using *assms*
proof (*induct i*)
case *0*
thus *?case* **by** *auto*
next
case (*Suc i*)
thus *?case* **by** *auto*
qed

lemma *inf-truncate-append*:
(*inf-truncate z i* • [*z* (*Suc i*)]) = *inf-truncate z* (*Suc i*)
proof (*induct i*)
case *0*
thus *?case* **by** *auto*
next
case (*Suc i*)
thus *?case* **by** *auto*
qed

5.3.4 Lemmas for *fin_make_untimed*

lemma *fin-make-untimed-append*:
assumes *h1*:*fin-make-untimed x* ≠ []
shows *fin-make-untimed* (*x* • *y*) ≠ []
using *assms* **by** (*simp add*: *fin-make-untimed-def*)

lemma *fin-make-untimed-inf-truncate-Nonempty*:
assumes *h1*:*z k* ≠ []
and *h2*:*k* ≤ *i*
shows *fin-make-untimed* (*inf-truncate z i*) ≠ []
using *assms*
apply (*simp add*: *fin-make-untimed-def*)
proof (*induct i*)
case *0*
thus *?case* **by** *auto*
next
case (*Suc i*)
thus *?case*
proof *cases*
assume *k* ≤ *i*
from *Suc* **and** *this* **show** ∃ *xs*∈*set* (*inf-truncate z* (*Suc i*)). *xs* ≠ []
by *auto*

```
    next
      assume ¬ k ≤ i
      from Suc and this have sg1:k = Suc i by arith
      from Suc and this show ∃ xs∈set (inf-truncate z (Suc i)). xs ≠ []
        by auto
     qed
qed


lemma last-fin-make-untimed-append:
last (fin-make-untimed (z • [[a]])) = a
  by (simp add: fin-make-untimed-def)


lemma last-fin-make-untimed-inf-truncate:
  assumes h1:z i = [a]
  shows last (fin-make-untimed (inf-truncate z i)) = a
using assms
proof (induction i)
  case 0
    from this show ?case by (simp add: fin-make-untimed-def)
next
    case (Suc i)
    thus ?case
    by (simp add: fin-make-untimed-def)
qed


lemma fin-make-untimed-append-empty:
fin-make-untimed (z • [[]]) = fin-make-untimed z
  by (simp add: fin-make-untimed-def)


lemma fin-make-untimed-inf-truncate-append-a:
fin-make-untimed (inf-truncate z i • [[a]]) !
  (length (fin-make-untimed (inf-truncate z i • [[a]])) − Suc 0) = a
  by (simp add: fin-make-untimed-def)


lemma fin-make-untimed-inf-truncate-Nonempty-all:
  assumes h1:z k ≠ []
  shows ∀ i. k ≤ i ⟶ fin-make-untimed (inf-truncate z i) ≠ []
using assms by (simp add:  fin-make-untimed-inf-truncate-Nonempty)


lemma fin-make-untimed-inf-truncate-Nonempty-all0:
  assumes h1:z 0 ≠ []
  shows ∀ i. fin-make-untimed (inf-truncate z i) ≠ []
using assms by (simp add: fin-make-untimed-inf-truncate-Nonempty)
```

lemma *fin-make-untimed-inf-truncate-Nonempty-all0a*:
assumes *h1*:$z\ 0 = [a]$
shows $\forall\ i.$ *fin-make-untimed* (*inf-truncate z i*) $\neq []$
using *assms* **by** (*simp add*: *fin-make-untimed-inf-truncate-Nonempty-all0*)

lemma *fin-make-untimed-inf-truncate-Nonempty-all-app*:
assumes *h1*:$z\ 0 = [a]$
shows $\forall\ i.$ *fin-make-untimed* (*inf-truncate z i* $\bullet$ $[z\ (Suc\ i)]$) $\neq []$
proof
fix *i*
from *h1* **have** *sg1*:*fin-make-untimed* (*inf-truncate z i*) $\neq []$
by (*simp add*: *fin-make-untimed-inf-truncate-Nonempty-all0a*)
from *h1* **and** *sg1* **show** *fin-make-untimed* (*inf-truncate z i* $\bullet$ $[z\ (Suc\ i)]$) $\neq []$
by (*simp add*: *fin-make-untimed-append*)
qed

lemma *fin-make-untimed-nth-length*:
assumes *h1*:$z\ i = [a]$
shows
fin-make-untimed (*inf-truncate z i*) !
(*length* (*fin-make-untimed* (*inf-truncate z i*)) $-$ *Suc 0*)
$= a$
proof $-$
from *h1* **have** *sg1*:*last* (*fin-make-untimed* (*inf-truncate z i*)) $= a$
by (*simp add*: *last-fin-make-untimed-inf-truncate*)
from *h1* **have** *sg2*:*concat* (*inf-truncate z i*) $\neq []$
by (*rule concat-inf-truncate-nonempty-a*)
from *h1* **and** *sg1* **and** *sg2* **show** *?thesis*
by (*simp add*: *fin-make-untimed-def last-nth-length*)
qed

5.3.5 Lemmas for *inf_disj* and *inf_disjS*

lemma *inf-disj-index*:
assumes *h1*:*inf-disj n nS*
and *h2*:$nS\ k\ t \neq []$
and *h3*:$k < n$
shows (*SOME i*. $i < n \wedge\ nS\ i\ t \neq []$) $= k$
proof $-$
from *h1* **have** $\forall\ j.\ k < n \wedge j < n \wedge k \neq j \wedge nS\ k\ t \neq [] \longrightarrow nS\ j\ t = []$
by (*simp add*: *inf-disj-def*, *auto*)
from *this* **and** *assms* **show** *?thesis* **by** *auto*
qed

lemma *inf-disjS-index*:
assumes *h1*:*inf-disjS IdSet nS*
and *h2*:*k*:*IdSet*
and *h3*:*nS k t* ≠ []
shows (*SOME i*. (*i*:*IdSet*) ∧ *nSend i t* ≠ []) = *k*
proof −
from *h1* **have** ∀ *j*. *k* ∈ *IdSet* ∧ *j* ∈ *IdSet* ∧ *nS k t* ≠ [] ⟶ *nS j t* = []
by (*simp add*: *inf-disjS-def*, *auto*)
from *this* **and** *assms* **show** *?thesis* **by** *auto*
qed

end

6 Properties of time-synchronous streams of types bool and bit

theory *BitBoolTS*
imports *Main stream*
begin

datatype *bit* = *Zero* | *One*

primrec
negation :: *bit* ⇒ *bit*
where
negation Zero = *One* |
negation One = *Zero*

lemma *ts-bit-stream-One*:
assumes *h1*:*ts x*
and *h2*:*x i* ≠ [*Zero*]
shows *x i* = [*One*]
proof −
from *h1* **have** *sg1*:*length* (*x i*) = *Suc 0*
by (*simp add*: *ts-def*)
from *this* **and** *h2* **show** *?thesis*
proof (*cases x i*)
assume *Nil*:*x i* = []
from *this* **and** *sg1* **show** *?thesis* **by** *simp*
next
fix *a l* **assume** *Cons*:*x i* = *a* # *l*
from *this* **and** *sg1* **and** *h2* **show** *?thesis*
proof (*cases a*)
assume *a* = *Zero*
from *this* **and** *sg1* **and** *h2* **and** *Cons* **show** *?thesis* **by** *auto*
next

```
    assume a = One
    from this and sg1 and Cons show ?thesis by auto
  qed
 qed
qed


lemma ts-bit-stream-Zero:
 assumes h1:ts x
     and h2:x i ≠ [One]
 shows x i = [Zero]
proof −
 from h1 have sg1:length (x i) = Suc 0
  by (simp add: ts-def)
 from this and h2 show ?thesis
 proof (cases x i)
  assume Nil:x i = []
  from this and sg1 show ?thesis by simp
 next
 fix a l assume Cons:x i = a # l
  from this and sg1 and h2 show ?thesis
  proof (cases a)
   assume a = Zero
   from this and sg1 and Cons show ?thesis by auto
  next
   assume a = One
   from this and sg1 and h2 and Cons show ?thesis by auto
  qed
 qed
qed


lemma ts-bool-True:
 assumes h1:ts x
     and h2:x i ≠ [False]
 shows x i = [True]
proof −
 from h1 have sg1:length (x i) = Suc 0
  by (simp add: ts-def)
 from this and h2 show ?thesis
 proof (cases x i)
  assume Nil:x i = []
  from this and sg1 show ?thesis by simp
 next
 fix a l assume Cons:x i = a # l
  from this and sg1 have sg2:x i = [a] by simp
  from this and h2 show ?thesis by auto
 qed
qed
```

lemma *ts-bool-False*:
assumes *h1*:*ts x*
and *h2*:*x i* ≠ [*True*]
shows *x i* = [*False*]
proof −
from *h1* **have** *sg1*:*length* (*x i*) = *Suc 0*
by (*simp add*: *ts-def*)
from *this* **and** *h2* **show** *?thesis*
proof (*cases x i*)
assume *Nil*:*x i* = []
from *this* **and** *sg1* **show** *?thesis* **by** *simp*
next
fix *a l* **assume** *Cons*:*x i* = *a* # *l*
from *this* **and** *sg1* **have** *sg2*:*x i* = [*a*] **by** *simp*
from *this* **and** *h2* **show** *?thesis* **by** *auto*
qed
qed

lemma *ts-bool-True-False*:
fixes *x*::*bool istream*
assumes *h1*:*ts x*
shows *x i* = [*True*] ∨ *x i* = [*False*]
proof (*cases x i* = [*True*])
assume *x i* = [*True*]
from *this* **and** *h1* **show** *?thesis* **by** *simp*
next
assume *x i* ≠ [*True*]
from *this* **and** *h1* **show** *?thesis* **by** (*simp add*: *ts-bool-False*)
qed

end

7 Changing time granularity of the streams

theory *JoinSplitTime*
imports *stream arith-hints*
begin

7.1 Join time units

primrec
join-ti ::*'a istream* ⇒ *nat* ⇒ *nat* ⇒ *'a list*
where
join-ti-0:
join-ti s x 0 = *s x* |
join-ti-Suc:

join-ti s x (Suc i) = (join-ti s x i) • (s (x + (Suc i)))

primrec
fin-join-ti ::*'a fstream* ⇒ *nat* ⇒ *nat* ⇒ *'a list*
where
fin-join-ti-0:
fin-join-ti s x 0 = nth s x |
fin-join-ti-Suc:
fin-join-ti s x (Suc i) = (fin-join-ti s x i) • (nth s (x + (Suc i)))

definition
join-time ::*'a istream* ⇒ *nat* ⇒ *'a istream*
where
join-time s n t ≡
(*case n of*
0 ⇒ []
|(*Suc i*) ⇒ *join-ti s* (*n*∗*t*) *i*)

lemma *join-ti-hint1*:
assumes *join-ti s x* (*Suc i*) = []
shows *join-ti s x i* = []
using *assms* **by** *auto*

lemma *join-ti-hint2*:
assumes *join-ti s x* (*Suc i*) = []
shows *s* (*x* + (*Suc i*)) = []
using *assms* **by** *auto*

lemma *join-ti-hint3*:
assumes *join-ti s x* (*Suc i*) = []
shows *s* (*x* + *i*) = []
using *assms* **by** (*induct i*, *auto*)

lemma *join-ti-empty-join*:
assumes *h1*:*i* ≤ *n*
and *h2*:*join-ti s x n* = []
shows *s* (*x*+*i*) = []
using *assms*
proof (*induct n*)
case *0*
from *this* **show** *?case* **by** *auto*
next
case (*Suc n*)
from *this* **show** *?case*
proof (*cases i* = *Suc n*)

```
    assume a1:i = Suc n
    from a1 and Suc show ?thesis by simp
  next
    assume a2:i ≠ Suc n
    from a2 and Suc show ?thesis by simp
  qed
qed

lemma join-ti-empty-ti:
  assumes ∀ i ≤ n. s (x+i) = []
  shows    join-ti s x n = []
using assms by (induct n, auto)


lemma join-ti-1nempty:
  assumes ∀ i. 0 < i ∧ i < Suc n ⟶ s (x+i) = []
  shows   join-ti s x n = s x
using assms by (induct n, auto)


lemma join-time1t: ∀ t. join-time s (1::nat) t = s t
by (simp add: join-time-def)


lemma join-time1: join-time s 1 = s
by (simp add: fun-eq-iff join-time-def)


lemma join-time-empty1:
  assumes h1:i < n
      and h2:join-time s n t = []
  shows      s (n*t + i) = []
proof (cases n)
  assume a1:n = 0
  from assms and a1 show ?thesis by (simp add: join-time-def)
next
  fix x
  assume a2:n = Suc x
  from assms and a2 have sg1:join-ti s (t + x * t) x = []
    by (simp add: join-time-def)
  from a2 and h1 have sg2:i ≤ x by simp
  from sg2 and sg1 and a2 show ?thesis by (simp add: join-ti-empty-join)
qed


lemma fin-join-ti-hint1:
  assumes fin-join-ti s x (Suc i) = []
  shows   fin-join-ti s x i = []
using assms by auto
```

lemma *fin-join-ti-hint2*:
assumes *fin-join-ti s x* (*Suc i*) = []
shows *nth s* (*x* + (*Suc i*)) = []
using *assms* **by** *auto*

lemma *fin-join-ti-hint3*:
assumes *fin-join-ti s x* (*Suc i*) = []
shows *nth s* (*x* + *i*) = []
using *assms* **by** (*induct i*, *auto*)

lemma *fin-join-ti-empty-join*:
assumes *h1*:*i* ≤ *n*
and *h2*:*fin-join-ti s x n* = []
shows *nth s* (*x*+*i*) = []
using *assms*
proof (*induct n*)
case *0*
from *this* **show** *?case* **by** *auto*
next
case (*Suc n*)
from *this* **show** *?case*
proof (*cases i* = *Suc n*)
assume *a1*:*i* = *Suc n*
from *Suc* **and** *a1* **show** *?thesis* **by** *simp*
next
assume *a2*:*i* ≠ *Suc n*
from *Suc* **and** *a2* **show** *?thesis* **by** *simp*
qed
qed

lemma *fin-join-ti-empty-ti*:
assumes ∀ *i* ≤ *n*. *nth s* (*x*+*i*) = []
shows *fin-join-ti s x n* = []
using *assms* **by** (*induct n*, *auto*)

lemma *fin-join-ti-1nempty*:
assumes ∀ *i*. *0* < *i* ∧ *i* < *Suc n* ⟶ *nth s* (*x*+*i*) = []
shows *fin-join-ti s x n* = *nth s x*
using *assms* **by** (*induct n*, *auto*)

7.2 Split time units

definition
split-time :: *'a istream* ⇒ *nat* ⇒ *'a istream*
where
split-time s n t ≡
(*if* (*t mod n* = *0*)
then s (*t div n*)
else [])

lemma *split-time1t*: ∀ *t*. *split-time s 1 t* = *s t*
by (*simp add*: *split-time-def*)

lemma *split-time1*: *split-time s 1* = *s*
by (*simp add*: *fun-eq-iff split-time-def*)

lemma *split-time-mod*:
assumes *t mod n* ≠ *0*
shows *split-time s n t* = []
using *assms* **by** (*simp add*: *split-time-def*)

lemma *split-time-nempty*:
assumes *0* < *n*
shows *split-time s n* (*n* ∗ *t*) = *s t*
using *assms* **by** (*simp add*: *split-time-def*)

lemma *split-time-nempty-Suc*:
assumes *0* < *n*
shows *split-time s* (*Suc n*) ((*Suc n*) ∗ *t*) = *split-time s n* (*n* ∗ *t*)
proof −
have *sg0*:*0* < *Suc n* **by** *simp*
from *sg0* **have** *sg1*:*split-time s* (*Suc n*) ((*Suc n*) ∗ *t*) = *s t*
by (*rule split-time-nempty*)
from *assms* **have** *sg2*:*split-time s n* (*n* ∗ *t*) = *s t*
by (*rule split-time-nempty*)
from *sg1* **and** *sg2* **show** *?thesis* **by** *simp*
qed

lemma *split-time-empty*:
assumes *h1*:*i* < *n* **and** *h2*:*0* < *i*
shows *split-time s n* (*n* ∗ *t* + *i*) = []
proof −
from *assms* **have** *sg1*:*0* < (*n* ∗ *t* + *i*) *mod n* **by** (*simp add*: *arith-mod-nzero*)
from *assms* **and** *sg1* **show** *?thesis* **by** (*simp add*: *split-time-def*)
qed

lemma *split-time-empty-Suc*:
assumes *h1*:*i* < *n* **and** *h2*:*0* < *i*
shows *split-time s* (*Suc n*) ((*Suc n*)∗ *t* + *i*) = *split-time s n* (*n* ∗ *t* + *i*)
proof −

from *h1* **have** *sg1*:$i < Suc\ n$ **by** *simp*
from *sg1* **and** *h2* **have** *sg2*:*split-time* $s\ (Suc\ n)\ (Suc\ n * t + i) = []$
by (*rule split-time-empty*)
from *assms* **have** *sg3*:*split-time* $s\ n\ (n * t + i) = []$
by (*rule split-time-empty*)
from *sg3* **and** *sg2* **show** *?thesis* **by** *simp*
qed

lemma *split-time-hint1*:
assumes $n = Suc\ m$
shows *split-time* $s\ (Suc\ n)\ (i + n * i + n) = []$
proof −
have *sg1*:$i + n * i + n = (Suc\ n) * i + n$ **by** *simp*
have *sg2*:$n < Suc\ n$ **by** *simp*
from *assms* **have** *sg3*:$0 < n$ **by** *simp*
from *sg2* **and** *sg3* **have** *sg4*:*split-time* $s\ (Suc\ n)\ (Suc\ n * i + n) = []$
by (*rule split-time-empty*)
from *sg1* **and** *sg4* **show** *?thesis* **by** *auto*
qed

7.3 Duality of the split and the join operators

lemma *join-split-i*:
assumes $0 < n$
shows *join-time* $(split\text{-}time\ s\ n)\ n\ i = s\ i$
proof (*cases n*)
assume *a1*:$n = 0$
from *this* **and** *assms* **show** *?thesis* **by** *simp*
next
fix *k*
assume *a2*:$n = Suc\ k$
have *sg0*:$0 < Suc\ k$ **by** *simp*
from *sg0* **have** *sg1*:$(split\text{-}time\ s\ (Suc\ k))\ (Suc\ k * i) = s\ i$
by (*rule split-time-nempty*)
have *sg2*:$i + k * i = (Suc\ k) * i$ **by** *simp*
have *sg3*:$\forall\ j.\ 0 < j \wedge j < Suc\ k \longrightarrow split\text{-}time\ s\ (Suc\ k)\ (Suc\ k * i + j) = []$
by (*clarify*, *rule split-time-empty*, *auto*)
from *sg3* **have** *sg4*:*join-ti* $(split\text{-}time\ s\ (Suc\ k))\ ((Suc\ k) * i)\ k =$
$(split\text{-}time\ s\ (Suc\ k))\ (Suc\ k * i)$
by (*rule join-ti-1nempty*)
from *a2* **and** *sg4* **and** *sg1* **show** *?thesis* **by** (*simp add*: *join-time-def*)
qed

lemma *join-split*:
assumes $0 < n$
shows *join-time* $(split\text{-}time\ s\ n)\ n = s$
using *assms* **by** (*simp add*: *fun-eq-iff join-split-i*)

end

8 Steam Boiler System: Specification

theory *SteamBoiler*
imports *stream BitBoolTS*
begin

definition
ControlSystem :: *nat istream* ⇒ *bool*
where
ControlSystem s ≡
(*ts s*) ∧
(∀ (*j*::*nat*). (*200*::*nat*) ≤ *hd* (*s j*) ∧ *hd* (*s j*) ≤ (*800*:: *nat*))

definition
SteamBoiler :: *bit istream* ⇒ *nat istream* ⇒ *nat istream* ⇒ *bool*
where
SteamBoiler x s y ≡
ts x
⟶
((*ts y*) ∧ (*ts s*) ∧ (*y* = *s*) ∧
((*s 0*) = [*500*::*nat*]) ∧
(∀ (*j*::*nat*). (∃ (*r*::*nat*).
(*0*::*nat*) < *r* ∧ *r* ≤ (*10*::*nat*) ∧
hd (*s* (*Suc j*)) =
(*if hd* (*x j*) = *Zero*
then (*hd* (*s j*)) − *r*
else (*hd* (*s j*)) + *r*))))

definition
Converter :: *bit istream* ⇒ *bit istream* ⇒ *bool*
where
Converter z x
≡
(*ts x*)
∧
(∀ (*t*::*nat*).
hd (*x t*) =
(*if* (*fin-make-untimed* (*inf-truncate z t*) = [])
then
Zero
else
(*fin-make-untimed* (*inf-truncate z t*)) !
((*length* (*fin-make-untimed* (*inf-truncate z t*))) − (*1*::*nat*))
))

definition
Controller-L ::
nat istream ⇒ *bit iustream* ⇒ *bit iustream* ⇒ *bit istream* ⇒ *bool*
where

```
Controller-L y lIn lOut z
 ≡
 (z 0 = [Zero])
 ∧
 (∀ (t::nat).
 ( if (lIn t) = Zero
   then ( if 300 < hd (y t)
          then (z t) = []     ∧ (lOut t) = Zero
          else (z t) = [One] ∧ (lOut t) = One
        )
   else ( if  hd (y t) < 700
          then (z t) = []      ∧ (lOut t) = One
          else (z t) = [Zero] ∧ (lOut t) = Zero ) ))

definition
  Controller :: nat istream ⇒ bit istream ⇒ bool
where
 Controller y z
 ≡
 (ts y)
 ⟶
 (∃ l. Controller-L y (fin-inf-append [Zero] l) l z)

definition
  ControlSystemArch :: nat istream ⇒ bool
where
 ControlSystemArch s
 ≡
 ∃ x z :: bit istream. ∃ y :: nat istream.
   ( SteamBoiler x s y ∧ Controller y z ∧ Converter z x )

end
```

9 Steam Boiler System: Verification

```
theory SteamBoiler-proof
imports SteamBoiler
begin
```

9.1 Properties of the Boiler Component

```
lemma L1-Boiler:
  assumes h1: SteamBoiler x s y
      and h2: ts x
  shows ts s
using assms  by (simp add: SteamBoiler-def)

lemma L2-Boiler:
  assumes h1: SteamBoiler x s y
```

```
    and h2: ts x
  shows ts y
using assms  by (simp add: SteamBoiler-def)


lemma L3-Boiler:
  assumes h1:SteamBoiler x s y
    and h2:ts x
  shows 200 ≤ hd (s 0)
using assms by (simp add: SteamBoiler-def)


lemma L4-Boiler:
  assumes h1:SteamBoiler x s y
    and h2:ts x
  shows hd (s 0) ≤ 800
using assms by (simp add: SteamBoiler-def)

lemma L5-Boiler:
  assumes h1:SteamBoiler x s y
    and h2:ts x
    and h3:hd (x j) = Zero
  shows (hd (s j)) ≤ hd (s (Suc j)) + (10::nat)
proof −
  from h1 and h2 obtain r where
    a1:r ≤ 10  and
    a2:hd (s (Suc j)) = (if hd (x j) = Zero then hd (s j) − r else hd (s j) + r)
    by (simp add: SteamBoiler-def, auto)
  from a2 and h3 have sg1:hd (s (Suc j)) = hd (s j) − r by simp
  from sg1 and a1 show ?thesis by auto
qed


lemma L6-Boiler:
  assumes h1:SteamBoiler x s y
    and h2:ts x
    and h3:hd (x j) = Zero
  shows (hd (s j)) − (10::nat) ≤ hd (s (Suc j))
proof −
  from h1 and h2 obtain r where
    a1:r ≤ 10  and
    a2:hd (s (Suc j)) = (if hd (x j) = Zero then hd (s j) − r else hd (s j) + r)
    by (simp add: SteamBoiler-def, auto)
  from a2 and h3 have sg1:hd (s (Suc j)) = hd (s j) − r by simp
  from sg1 and a1 show ?thesis by auto
qed
```

lemma *L7-Boiler*:
assumes *h1*:*SteamBoiler x s y*
and *h2*:*ts x*
and *h3*:*hd (x j)* $\neq$ *Zero*
shows *(hd (s j))* $\geq$ *hd (s (Suc j))* $-$ *(10::nat)*
using *assms*
proof $-$
from *h1* **and** *h2* **obtain** *r* **where**
a1:*r* $\leq$ *10* **and**
a2:*hd (s (Suc j))* = *(if hd (x j)* = *Zero then hd (s j)* $-$ *r else hd (s j)* + *r)*
by *(simp add: SteamBoiler-def, auto)*
from *a2* **and** *h3* **have** *sg1*:*hd (s (Suc j))* = *hd (s j)* + *r* **by** *simp*
from *sg1* **and** *a1* **show** *?thesis* **by** *auto*
qed

lemma *L8-Boiler*:
assumes *h1*:*SteamBoiler x s y*
and *h2*:*ts x*
and *h3*:*hd (x j)* $\neq$ *Zero*
shows *(hd (s j))* + *(10::nat)* $\geq$ *hd (s (Suc j))*
proof $-$
from *h1* **and** *h2* **obtain** *r* **where**
a1:*r* $\leq$ *10* **and**
a2:*hd (s (Suc j))* = *(if hd (x j)* = *Zero then hd (s j)* $-$ *r else hd (s j)* + *r)*
by *(simp add: SteamBoiler-def, auto)*
from *a2* **and** *h3* **have** *sg1*:*hd (s (Suc j))* = *hd (s j)* + *r* **by** *simp*
from *sg1* **and** *a1* **show** *?thesis* **by** *auto*
qed

9.2 Properties of the Controller Component

lemma *L1-Controller*:
assumes *h1*:*Controller-L s (fin-inf-append [Zero] l) l z*
shows *fin-make-untimed (inf-truncate z i)* $\neq$ []
proof $-$
from *h1* **have** $\forall$ *i. 0* $\leq$ *i* $\longrightarrow$ *fin-make-untimed (inf-truncate z i)* $\neq$ []
by *(simp add: Controller-L-def fin-make-untimed-inf-truncate-Nonempty-all0a)*
from *this* **show** *?thesis* **by** *simp*
qed

lemma *L2-Controller-Zero*:
assumes *h1*:*Controller-L y (fin-inf-append [Zero] l) l z*
and *h2*:*l t* = *Zero*
and *h3*:*300* $<$ *hd (y (Suc t))*
shows *z (Suc t)* = []
proof $-$
from *h2* **have** *sg1*:*fin-inf-append [Zero] l (Suc t)* = *Zero*

by (*simp add*: *correct-fin-inf-append1*)
from *h1* **and** *sg1* **and** *h3* **show** *?thesis* **by** (*simp add*: *Controller-L-def*)
qed

lemma *L2-Controller-One*:
assumes *h1*:*Controller-L y* (*fin-inf-append* [*Zero*] *l*) *l z*
and *h2*:*l t* = *One*
and *h3*:*hd* (*y* (*Suc t*)) < *700*
shows *z* (*Suc t*) = []
proof −
from *h2* **have** *sg1*:*fin-inf-append* [*Zero*] *l* (*Suc t*) ≠ *Zero*
by (*simp add*: *correct-fin-inf-append1*)
from *h1* **and** *sg1* **and** *h3* **show** *?thesis* **by** (*simp add*: *Controller-L-def*)
qed

lemma *L3-Controller-Zero*:
assumes *h1*:*Controller-L y* (*fin-inf-append* [*Zero*] *l*) *l z*
and *h2*:*l t* = *Zero*
and *h3*:¬ *300* < *hd* (*y* (*Suc t*))
shows *z* (*Suc t*) = [*One*]
proof −
from *h2* **have** *sg1*:*fin-inf-append* [*Zero*] *l* (*Suc t*) = *Zero*
by (*simp add*: *correct-fin-inf-append1*)
from *h1* **and** *sg1* **and** *h3* **show** *?thesis* **by** (*simp add*: *Controller-L-def*)
qed

lemma *L3-Controller-One*:
assumes *h1*:*Controller-L y* (*fin-inf-append* [*Zero*] *l*) *l z*
and *h2*:*l t* = *One*
and *h3*:¬ *hd* (*y* (*Suc t*)) < *700*
shows *z* (*Suc t*) = [*Zero*]
proof −
from *h2* **have** *sg1*:*fin-inf-append* [*Zero*] *l* (*Suc t*) ≠ *Zero*
by (*simp add*: *correct-fin-inf-append1*)
from *h1* **and** *sg1* **and** *h3* **show** *?thesis* **by** (*simp add*: *Controller-L-def*)
qed

lemma *L4-Controller-Zero*:
assumes *h1*:*Controller-L y* (*fin-inf-append* [*Zero*] *l*) *l z*
and *h2*:*l* (*Suc t*) = *Zero*
shows (*z* (*Suc t*) = [] ∧ *l t* = *Zero*) ∨ (*z* (*Suc t*) = [*Zero*] ∧ *l t* = *One*)
proof (*cases l t*)
assume *a1*:*l t* = *Zero*
from *this* **and** *h1* **and** *h2* **show** *?thesis*
proof −

```
    from a1 have sg1:fin-inf-append [Zero] l (Suc t) = Zero
      by (simp add: correct-fin-inf-append1)
    from h1 and sg1 have sg2:
      if 300 < hd (y (Suc t))
       then z (Suc t) = [] ∧ l (Suc t) = Zero
       else z (Suc t) = [One] ∧ l (Suc t) = One
       by (simp add: Controller-L-def)
    show ?thesis
    proof (cases 300 < hd (y (Suc t)))
      assume a11:300 < hd (y (Suc t))
      from a11 and sg2 have sg3:z (Suc t) = [] ∧ l (Suc t) = Zero by simp
      from this and a1 show ?thesis by simp
    next
      assume a12:¬ 300 < hd (y (Suc t))
      from a12 and sg2 have sg4:z (Suc t) = [One] ∧ l (Suc t) = One by simp
      from this and h2 show ?thesis by simp
    qed
  qed
next
  assume a2:l t = One
  from this and h1 and h2 show ?thesis
  proof −
    from a2 have sg5:fin-inf-append [Zero] l (Suc t) ≠ Zero
      by (simp add: correct-fin-inf-append1)
    from h1 and sg5 have sg6:
      if hd (y (Suc t)) < 700
       then z (Suc t) = [] ∧ l (Suc t) = One
       else z (Suc t) = [Zero] ∧ l (Suc t) = Zero
       by (simp add: Controller-L-def)
    show ?thesis
    proof (cases hd (y (Suc t)) < 700)
      assume a21:hd (y (Suc t)) < 700
      from a21 and sg6 have sg7:z (Suc t) = [] ∧ l (Suc t) = One by simp
      from this and h2 show ?thesis by simp
    next
      assume a22:¬ hd (y (Suc t)) < 700
      from a22 and sg6 have sg8:z (Suc t) = [Zero] ∧ l (Suc t) = Zero by simp
      from this and a2 show ?thesis by simp
    qed
  qed
qed


lemma L4-Controller-One:
  assumes h1:Controller-L y (fin-inf-append [Zero] l) l z
      and h2:l (Suc t) = One
  shows      (z (Suc t) = [] ∧ l t = One) ∨ (z (Suc t) = [One] ∧ l t = Zero)
proof (cases l t)
  assume a1:l t = Zero
```

```
  from this and h1 and h2 show ?thesis
  proof −
    from a1 have sg1:fin-inf-append [Zero] l (Suc t) = Zero
      by (simp add: correct-fin-inf-append1)
    from h1 and sg1 have sg2:
      if 300 < hd (y (Suc t))
       then z (Suc t) = [] ∧ l (Suc t) = Zero
       else z (Suc t) = [One] ∧ l (Suc t) = One
       by (simp add: Controller-L-def)
    show ?thesis
    proof (cases 300 < hd (y (Suc t)))
      assume a11:300 < hd (y (Suc t))
      from a11 and sg2 have sg3:z (Suc t) = [] ∧ l (Suc t) = Zero by simp
      from this and h2 show ?thesis by simp
    next
      assume a12:¬ 300 < hd (y (Suc t))
      from a12 and sg2 have sg4:z (Suc t) = [One] ∧ l (Suc t) = One by simp
      from this and a1 show ?thesis by simp
    qed
  qed
next
  assume a2:l t = One
  from this and h1 and h2 show ?thesis
  proof −
    from a2 have sg5:fin-inf-append [Zero] l (Suc t) ≠ Zero
      by (simp add: correct-fin-inf-append1)
    from h1 and sg5 have sg6:
      if hd (y (Suc t)) < 700
       then z (Suc t) = [] ∧ l (Suc t) = One
       else z (Suc t) = [Zero] ∧ l (Suc t) = Zero
       by (simp add: Controller-L-def)
    show ?thesis
    proof (cases hd (y (Suc t)) < 700)
      assume a21:hd (y (Suc t)) < 700
      from a21 and sg6 have sg7:z (Suc t) = [] ∧ l (Suc t) = One by simp
      from this and a2 show ?thesis by simp
    next
      assume a22:¬ hd (y (Suc t)) < 700
      from a22 and sg6 have sg8:z (Suc t) = [Zero] ∧ l (Suc t) = Zero by simp
      from this and h2 show ?thesis by simp
    qed
  qed
qed

lemma L5-Controller-Zero:
  assumes h1:Controller-L y lIn lOut z
      and h2:lOut t = Zero
      and h3:z t = []
  shows lIn t = Zero
```

proof (*cases lIn t*)
assume *a1*:*lIn t* = *Zero*
from *this* **show** *?thesis* **by** *simp*
next
assume *a2*:*lIn t* = *One*
from *a2* **and** *h1* **have** *sg1*:
if hd (*y t*) < *700*
then z t = [] ∧ *lOut t* = *One*
else z t = [*Zero*] ∧ *lOut t* = *Zero*
by (*simp add*: *Controller-L-def*)
show *?thesis*
proof (*cases hd* (*y t*) < *700*)
assume *a3*:*hd* (*y t*) < *700*
from *a3* **and** *sg1* **have** *sg2*:*z t* = [] ∧ *lOut t* = *One* **by** *simp*
from *this* **and** *h2* **show** *?thesis* **by** *simp*
next
assume *a4*:¬ *hd* (*y t*) < *700*
from *a4* **and** *sg1* **have** *sg3*:*z t* = [*Zero*] ∧ *lOut t* = *Zero* **by** *simp*
from *this* **and** *h3* **show** *?thesis* **by** *simp*
qed
qed

lemma *L5-Controller-One*:
assumes *h1*:*Controller-L y lIn lOut z*
and *h2*:*lOut t* = *One*
and *h3*:*z t* = []
shows *lIn t* = *One*
proof (*cases lIn t*)
assume *a1*:*lIn t* = *Zero*
from *a1* **and** *h1* **have** *sg1*:
if 300 < *hd* (*y t*)
then z t = [] ∧ *lOut t* = *Zero*
else z t = [*One*] ∧ *lOut t* = *One*
by (*simp add*: *Controller-L-def*)
show *?thesis*
proof (*cases* 300 < *hd* (*y t*))
assume *a3*:300 < *hd* (*y t*)
from *a3* **and** *sg1* **have** *sg2*:*z t* = [] ∧ *lOut t* = *Zero* **by** *simp*
from *this* **and** *h2* **show** *?thesis* **by** *simp*
next
assume *a4*:¬ 300 < *hd* (*y t*)
from *a4* **and** *sg1* **have** *sg3*:*z t* = [*One*] ∧ *lOut t* = *One* **by** *simp*
from *this* **and** *h3* **show** *?thesis* **by** *simp*
qed
next
assume *a2*:*lIn t* = *One*
from *this* **show** *?thesis* **by** *simp*
qed

lemma *L5-Controller*:
assumes *h1*:*Controller-L y lIn lOut z*
and *h2*:*lOut t* = *a*
and *h3*:*z t* = []
shows *lIn t* = *a*
proof (*cases a*)
assume *a* = *Zero*
from *this* **and** *h1* **and** *h2* **and** *h3* **show** *?thesis*
by (*simp add*: *L5-Controller-Zero*)
next
assume *a* = *One*
from *this* **and** *h1* **and** *h2* **and** *h3* **show** *?thesis*
by (*simp add*: *L5-Controller-One*)
qed

lemma *L6-Controller-Zero*:
assumes *h1*:*Controller-L y* (*fin-inf-append* [*Zero*] *l*) *l z*
and *h2*:*l* (*Suc t*) = *Zero*
and *h3*:*z* (*Suc t*) = []
shows *l t* = *Zero*
proof −
from *h1* **and** *h2* **and** *h3* **have** (*fin-inf-append* [*Zero*] *l*) (*Suc t*) = *Zero*
by (*simp add*: *L5-Controller-Zero*)
from *this* **show** *?thesis*
by (*simp add*: *correct-fin-inf-append2*)
qed

lemma *L6-Controller-One*:
assumes *h1*:*Controller-L y* (*fin-inf-append* [*Zero*] *l*) *l z*
and *h2*:*l* (*Suc t*) = *One*
and *h3*:*z* (*Suc t*) = []
shows *l t* = *One*
proof −
from *h1* **and** *h2* **and** *h3* **have** (*fin-inf-append* [*Zero*] *l*) (*Suc t*) = *One*
by (*simp add*: *L5-Controller-One*)
from *this* **show** *?thesis*
by (*simp add*: *correct-fin-inf-append2*)
qed

lemma *L6-Controller*:
assumes *h1*:*Controller-L y* (*fin-inf-append* [*Zero*] *l*) *l z*
and *h2*:*l* (*Suc t*) = *a*
and *h3*:*z* (*Suc t*) = []
shows *l t* = *a*

```
proof (cases a)
  assume a = Zero
  from this and h1 and h2 and h3 show ?thesis
    by (simp add:  L6-Controller-Zero)
next
  assume a = One
  from this and h1 and h2 and h3 show ?thesis
    by (simp add:  L6-Controller-One)
qed


lemma L7-Controller-Zero:
  assumes h1:Controller-L y (fin-inf-append [Zero] l) l z
      and h2:l t = Zero
  shows      last (fin-make-untimed (inf-truncate z t)) = Zero
using assms
proof (induct t)
  case 0
  from h1 have sg1:z 0 = [Zero] by (simp add: Controller-L-def)
  from this show ?case by (simp add: fin-make-untimed-def)
next
   fix t
   case (Suc t)
   from this show ?case
   proof (cases l t)
     assume a1:l t = Zero
     from Suc have
       sg1:(z (Suc t) = [] ∧ l t = Zero) ∨ (z (Suc t) = [Zero] ∧ l t = One)
       by (simp add: L4-Controller-Zero)
     from this and a1 have sg2:z (Suc t) = []
       by simp
     from Suc and sg2 and a1 show ?case
       by (simp add: fin-make-untimed-append-empty)
   next
     assume a1:l t = One
     from Suc have
       sg1:(z (Suc t) = [] ∧ l t = Zero) ∨ (z (Suc t) = [Zero] ∧ l t = One)
       by (simp add: L4-Controller-Zero)
     from this and a1 have sg2:z (Suc t) = [Zero]  by simp
     from a1 and Suc and sg2 show ?case
       by (simp add: fin-make-untimed-def)
   qed
qed


lemma L7-Controller-One-l0:
  assumes h1:Controller-L y (fin-inf-append [Zero] l) l z
      and h2:y 0 = [500::nat]
  shows    l 0 = Zero
```

proof (*rule ccontr*)
assume *a1*: ¬ *l 0* = *Zero*
from *assms* **have** *sg1*:*z 0* = [*Zero*] **by** (*simp add*: *Controller-L-def*)
have *sg2*:*fin-inf-append* [*Zero*] *l* (*0*::*nat*) = *Zero* **by** (*simp add*: *fin-inf-append-def*)
from *assms* **and** *a1* **and** *sg1* **and** *sg2* **show** *False*
by (*simp add*: *Controller-L-def*)
qed

lemma *L7-Controller-One*:
assumes *h1*:*Controller-L y* (*fin-inf-append* [*Zero*] *l*) *l z*
and *h2*:*l t* = *One*
and *h3*:*y 0* = [*500*::*nat*]
shows *last* (*fin-make-untimed* (*inf-truncate z t*)) = *One*
using *assms*
proof (*induct t*)
case *0*
from *h1* **and** *h3* **have** *sg0*:*l 0* = *Zero* **by** (*simp add*: *L7-Controller-One-l0*)
from *this* **and** *0* **show** *?case* **by** *simp*
next
fix *t*
case (*Suc t*)
from *this* **show** *?case*
proof (*cases l t*)
assume *a1*:*l t* = *Zero*
from *Suc* **have**
sg1:(*z* (*Suc t*) = [] ∧ *l t* = *One*) ∨ (*z* (*Suc t*) = [*One*] ∧ *l t* = *Zero*)
by (*simp add*: *L4-Controller-One*)
from *this* **and** *a1* **have** *sg2*:*z* (*Suc t*) = [*One*]
by *simp*
from *Suc* **and** *sg2* **and** *a1* **show** *?case*
by (*simp add*: *fin-make-untimed-def*)
next
assume *a1*:*l t* = *One*
from *Suc* **have**
sg1:(*z* (*Suc t*) = [] ∧ *l t* = *One*) ∨ (*z* (*Suc t*) = [*One*] ∧ *l t* = *Zero*)
by (*simp add*: *L4-Controller-One*)
from *this* **and** *a1* **have** *sg2*:*z* (*Suc t*) = []
by *simp*
from *a1* **and** *Suc* **and** *sg2* **show** *?case*
by (*simp add*: *fin-make-untimed-def*)
qed
qed

lemma *L7-Controller*:
assumes *h1*:*Controller-L y* (*fin-inf-append* [*Zero*] *l*) *l z*
and *h2*:*y 0* = [*500*::*nat*]
shows *last* (*fin-make-untimed* (*inf-truncate z t*)) = *l t*

proof (*cases l t*)
assume *l t = Zero*
from *this* **and** *h1* **show** *?thesis*
by (*simp add*: *L7-Controller-Zero*)
next
assume *l t = One*
from *this* **and** *h1* **and** *h2* **show** *?thesis*
by (*simp add*: *L7-Controller-One*)
qed

lemma *L8-Controller*:
assumes *h1*:*Controller-L y* (*fin-inf-append* [*Zero*] *l*) *l z*
shows *z t* = [] ∨ *z t* = [*Zero*] ∨ *z t* = [*One*]
proof (*cases fin-inf-append* [*Zero*] *l t* = *Zero*)
assume *a1*:*fin-inf-append* [*Zero*] *l t* = *Zero*
from *a1* **and** *h1* **have** *sg1*:
if 300 < *hd* (*y t*)
then z t = [] ∧ *l t* = *Zero*
else z t = [*One*] ∧ *l t* = *One*
by (*simp add*: *Controller-L-def*)
show *?thesis*
proof (*cases 300* < *hd* (*y t*))
assume *a11*:*300* < *hd* (*y t*)
from *a11* **and** *sg1* **show** *?thesis* **by** *simp*
next
assume *a12*:¬ *300* < *hd* (*y t*)
from *a12* **and** *sg1* **show** *?thesis* **by** *simp*
qed
next
assume *a2*:*fin-inf-append* [*Zero*] *l t* ≠ *Zero*
from *a2* **and** *h1* **have** *sg2*:
if hd (*y t*) < *700*
then z t = [] ∧ *l t* = *One*
else z t = [*Zero*] ∧ *l t* = *Zero*
by (*simp add*: *Controller-L-def*)
show *?thesis*
proof (*cases hd* (*y t*) < *700*)
assume *a21*:*hd* (*y t*) < *700*
from *a21* **and** *sg2* **show** *?thesis* **by** *simp*
next
assume *a22*:¬ *hd* (*y t*) < *700*
from *a22* **and** *sg2* **show** *?thesis* **by** *simp*
qed
qed

```
lemma L9-Controller:
  assumes h1:Controller-L s (fin-inf-append [Zero] l) l z
      and h2:fin-make-untimed (inf-truncate z i) !
            (length (fin-make-untimed (inf-truncate z i)) - Suc 0) =  Zero
      and h3:last (fin-make-untimed (inf-truncate z i)) = l i
      and h4:200 ≤ hd (s i)
      and h5:hd (s (Suc i)) = hd (s i) - r
      and h6:fin-make-untimed (inf-truncate z i) ≠ []
      and h7:0 < r
      and h8:r ≤ 10
  shows 200 ≤ hd (s (Suc i))
proof -
  from h6 and h2 and h3 have sg0:l i = Zero
    by (simp add: last-nth-length)
  show ?thesis
  proof (cases fin-inf-append [Zero] l i = Zero)
    assume a1:fin-inf-append [Zero] l i = Zero
    from a1 and h1 have sg1:
      if 300 < hd (s i)
       then z i = [] ∧ l i = Zero
       else z i = [One] ∧ l i = One
       by (simp add: Controller-L-def)
    show ?thesis
    proof (cases 300 < hd (s i))
      assume a11:300 < hd (s i)
      from a11 and h5 and h8 show ?thesis by simp
    next
      assume a12:¬ 300 < hd (s i)
      from a12 and sg1 and sg0 show ?thesis by simp
    qed
  next
    assume a2:fin-inf-append [Zero] l i ≠ Zero
    from a2 and h1 have sg2:
      if hd (s i) < 700
       then z i = [] ∧ l i = One
       else z i = [Zero] ∧ l i = Zero
       by (simp add: Controller-L-def)
    show ?thesis
    proof (cases hd (s i) < 700)
      assume a21:hd (s i) < 700
      from this and sg2 and sg0 show ?thesis by simp
    next
      assume a22:¬ hd (s i) < 700
      from this and h5 and h8  show ?thesis by simp
    qed
  qed
qed
```

```
lemma L10-Controller:
  assumes h1:Controller-L s (fin-inf-append [Zero] l) l z
      and h2:fin-make-untimed (inf-truncate z i) !
            (length (fin-make-untimed (inf-truncate z i)) − Suc 0) ≠  Zero
      and h3:last (fin-make-untimed (inf-truncate z i)) = l i
      and h4:hd (s i) ≤ 800
      and h5:hd (s (Suc i)) = hd (s i) + r
      and h6:fin-make-untimed (inf-truncate z i) ≠ []
      and h7:0 < r
      and h8:r ≤ 10
  shows hd (s (Suc i)) ≤ 800
proof −
  from h6 and h2 and h3 have sg0:l i ≠  Zero
    by (simp add: last-nth-length)
  show ?thesis
  proof (cases fin-inf-append [Zero] l i = Zero)
    assume a1:fin-inf-append [Zero] l i = Zero
    from a1 and h1 have sg1:
      if 300 < hd (s i)
       then z i = [] ∧ l i = Zero
       else z i = [One] ∧ l i = One
       by (simp add: Controller-L-def)
    show ?thesis
    proof (cases 300 < hd (s i))
      assume a11:300 < hd (s i)
      from a11 and sg1 and sg0 show ?thesis by simp
    next
      assume a12:¬ 300 < hd (s i)
      from h5 and a12 and h8 show ?thesis by simp
    qed
  next
    assume a2:fin-inf-append [Zero] l i ≠ Zero
    from a2 and h1 have sg2:
      if hd (s i) < 700
       then z i = [] ∧ l i = One
       else z i = [Zero] ∧ l i = Zero
       by (simp add: Controller-L-def)
    show ?thesis
    proof (cases hd (s i) < 700)
      assume a21:hd (s i) < 700
      from this and h5 and h8 show ?thesis by simp
    next
      assume a22:¬ hd (s i) < 700
      from this and sg2 and sg0 show ?thesis by simp
    qed
  qed
qed
```

9.3 Properties of the Converter Component

lemma *L1-Converter*:
assumes *h1*:*Converter z x*
and *h2*:*fin-make-untimed* (*inf-truncate z t*) ≠ []
shows *hd* (*x t*) = (*fin-make-untimed* (*inf-truncate z t*)) !
((*length* (*fin-make-untimed* (*inf-truncate z t*))) − (*1*::*nat*))
using *assms*
by (*simp add*: *Converter-def*)

lemma *L1a-Converter*:
assumes *h1*:*Converter z x*
and *h2*:*fin-make-untimed* (*inf-truncate z t*) ≠ []
and *h3*:*hd* (*x t*) = *Zero*
shows (*fin-make-untimed* (*inf-truncate z t*)) !
((*length* (*fin-make-untimed* (*inf-truncate z t*))) − (*1*::*nat*))
= *Zero*
using *assms*
by (*simp add*: *L1-Converter*)

9.4 Properties of the System

lemma *L1-ControlSystem*:
assumes *h1*:*ControlSystemArch s*
shows *ts s*
proof −
from *h1* **obtain** *x z y*
where *a1*:*Converter z x* **and** *a2*: *SteamBoiler x s y*
by (*simp only*: *ControlSystemArch-def*, *auto*)
from *this* **have** *sg1*:*ts x*
by (*simp add*: *Converter-def*)
from *a2* **and** *sg1* **show** *?thesis* **by** (*rule L1-Boiler*)
qed

lemma *L2-ControlSystem*:
assumes *h1*:*ControlSystemArch s*
shows (*200*::*nat*) ≤ *hd* (*s i*)
proof −
from *h1* **obtain** *x z y*
where *a1*:*Converter z x* **and** *a2*: *SteamBoiler x s y* **and** *a3*:*Controller y z*
by (*simp only*: *ControlSystemArch-def*, *auto*)
from *this* **have** *sg1*:*ts x* **by** (*simp add*: *Converter-def*)
from *sg1* **and** *a2* **have** *sg2*:*ts y* **by** (*simp add*: *L2-Boiler*)
from *sg1* **and** *a2* **have** *sg3*:*y* = *s* **by** (*simp add*: *SteamBoiler-def*)
from *a1* **and** *a2* **and** *a3* **and** *sg1* **and** *sg2* **and** *sg3* **show** *200* ≤ *hd* (*s i*)
proof (*induction i*)
case *0*
from *this* **show** *?case* **by** (*simp add*: *L3-Boiler*)
next

```
    fix i
    case (Suc i)
    from this obtain l
      where a4: Controller-L s (fin-inf-append [Zero] l) l z
      by (simp add: Controller-def, atomize, auto)
    from Suc and a4 have sg4:fin-make-untimed (inf-truncate z i) ≠ []
      by (simp add: L1-Controller)
   from a2 and sg1 have y0asm:y 0 = [500::nat] by (simp add: SteamBoiler-def)
     from Suc and a4 and sg4 and y0asm have sg5: last (fin-make-untimed
(inf-truncate z i)) =  l i
      by (simp add: L7-Controller)
    from a2 and sg1 obtain r where
      aa0:0 < r and
      aa1:r ≤ 10 and
      aa2:hd (s (Suc i)) = (if hd (x i) = Zero then hd (s i) − r else hd (s i) + r)
       by (simp add: SteamBoiler-def, auto)
    from Suc and a4 and sg4 and sg5 show ?case
    proof (cases hd (x i) = Zero)
      assume aaZero:hd (x i) = Zero
      from a1 and sg4 and this have
        sg7:(fin-make-untimed (inf-truncate z i)) !
            ((length (fin-make-untimed (inf-truncate z i))) − Suc 0)  = Zero
        by (simp add: L1-Converter)
      from aa2 and aaZero have sg8:hd (s (Suc i)) = hd (s i) − r by simp
      from Suc have sgSuc:200 ≤ hd (s i) by simp
      from a4 and sg7 and sg5 and sgSuc and sg8 and sg4 and aa0 and aa1
      show ?thesis
        by (rule L9-Controller)
     next
      assume aaOne:hd (x i) ≠ Zero
      from a1 and sg4 and this have
        sg7:(fin-make-untimed (inf-truncate z i)) !
            ((length (fin-make-untimed (inf-truncate z i))) − Suc 0) ≠ Zero
        by (simp add: L1-Converter)
      from aa2 and aaOne have sg9:hd (s (Suc i)) = hd (s i) + r by simp
      from Suc and this show ?thesis by simp
     qed
  qed
qed


lemma L3-ControlSystem:
  assumes h1:ControlSystemArch s
  shows hd (s i) ≤ (800:: nat)
proof −
  from h1 obtain x z y
    where a1:Converter z x and a2: SteamBoiler x s y and a3:Controller y z
    by (simp only: ControlSystemArch-def, auto)
  from this have sg1:ts x  by (simp add: Converter-def)
```

```
  from sg1 and a2 have sg2:ts y  by (simp add: L2-Boiler)
  from sg1 and a2 have sg3:y = s by (simp add: SteamBoiler-def)
  from a1 and a2 and a3 and sg1 and sg2 and sg3 show hd (s i) ≤ (800::
nat)
  proof (induction i)
    case 0
    from this show ?case  by (simp add: L4-Boiler)
  next
    fix i
    case (Suc i)
    from this obtain l
      where a4: Controller-L s (fin-inf-append [Zero] l) l z
      by (simp add: Controller-def, atomize, auto)
    from a4 have sg4:fin-make-untimed (inf-truncate z i) ≠ []
      by (simp add:  L1-Controller)
   from a2 and sg1 have y0asm:y 0 = [500::nat] by (simp add: SteamBoiler-def)
     from Suc and a4 and sg4 and y0asm have sg5: last (fin-make-untimed
(inf-truncate z i)) =  l i
      by (simp add: L7-Controller)
    from a2 and sg1 obtain r where
      aa0:0 < r and
      aa1:r ≤ 10 and
      aa2:hd (s (Suc i)) = (if hd (x i) = Zero then hd (s i) − r else hd (s i) + r)
        by (simp add: SteamBoiler-def, auto)
    from this and Suc and a4 and sg4 and sg5 show ?case
    proof (cases hd (x i) = Zero)
      assume aaZero:hd (x i) = Zero
      from a1 and sg4 and this have
        sg7:(fin-make-untimed (inf-truncate z i)) !
            ((length (fin-make-untimed (inf-truncate z i))) − Suc 0)  = Zero
        by (simp add: L1-Converter)
      from aa2 and aaZero have sg8:hd (s (Suc i)) = hd (s i) − r by simp
      from this and Suc show ?thesis by simp
    next
      assume aaOne:hd (x i) ≠ Zero
      from a1 and sg4 and this have
        sg7:(fin-make-untimed (inf-truncate z i)) !
            ((length (fin-make-untimed (inf-truncate z i))) − Suc 0) ≠ Zero
        by (simp add: L1-Converter)
      from aa2 and aaOne have sg9:hd (s (Suc i)) = hd (s i) + r by simp
      from Suc have sgSuc:hd (s i) ≤ 800 by simp
      from a4 and sg7 and sg5 and sgSuc and sg9 and sg4 and aa0 and aa1
      show ?thesis
        by (rule L10-Controller)
    qed
  qed
qed
```

9.5 Proof of the Refinement Relation

lemma *L0-ControlSystem*:
assumes *h1*:*ControlSystemArch s*
shows *ControlSystem s*
apply (*simp add*: *ControlSystem-def*)
apply *auto*
proof −
from *h1* **show** *sg1*:*ts s* **by** (*rule L1-ControlSystem*)
next
fix *j*
from *h1* **show** *sg2*:(*200*::*nat*) ≤ *hd* (*s j*) **by** (*rule L2-ControlSystem*)
next
fix *j*
from *h1* **show** *sg3*:*hd* (*s j*) ≤ (*800*:: *nat*) **by** (*rule L3-ControlSystem*)
qed

end

10 FlexRay: Types

theory *FR-types*
imports *stream*
begin

record *'a Message* =
message-id :: *nat*
ftcdata :: *'a*

record *'a Frame* =
slot :: *nat*
dataF :: (*'a Message*) *list*

record *Config* =
schedule :: *nat list*
cycleLength :: *nat*

type-synonym *'a nFrame* = *nat* ⇒ (*'a Frame*) *istream*
type-synonym *nNat* = *nat* ⇒ *nat istream*
type-synonym *nConfig* = *nat* ⇒ *Config*

consts *sN* :: *nat*

definition
sheafNumbers :: *nat list*
where *sheafNumbers* ≡ [*sN*]

end

11 FlexRay: Specification

theory *FR*
imports *FR-types*
begin

11.1 Auxiliary predicates

— The predicate DisjointSchedules is true for sheaf of channels of type Config,
— if all bus configurations have disjoint scheduling tables.
definition
DisjointSchedules :: *nat* ⇒ *nConfig* ⇒ *bool*
where
DisjointSchedules n nC
≡
∀ *i j*. *i* < *n* ∧ *j* < *n* ∧ *i* ≠ *j* ⟶
disjoint (*schedule* (*nC i*)) (*schedule* (*nC j*))

— The predicate IdenticCycleLength is true for sheaf of channels of type Config,
— if all bus configurations have the equal length of the communication round.
definition
IdenticCycleLength :: *nat* ⇒ *nConfig* ⇒ *bool*
where
IdenticCycleLength n nC
≡
∀ *i j*. *i* < *n* ∧ *j* < *n* ⟶
cycleLength (*nC i*) = *cycleLength* (*nC j*)

— The predicate FrameTransmission defines the correct message transmission:
— if the time t is equal modulo the length of the cycle (Flexray communication round)
— to the element of the scheduler table of the node k, then this and only this node

— can send a data atn the *t*th time interval.
definition
FrameTransmission ::
nat ⇒ *'a nFrame* ⇒ *'a nFrame* ⇒ *nNat* ⇒ *nConfig* ⇒ *bool*
where
FrameTransmission n nStore nReturn nGet nC
≡
∀ (*t*::*nat*) (*k*::*nat*). *k* < *n* ⟶
(*let s* = *t mod* (*cycleLength* (*nC k*))
in
(*s mem* (*schedule* (*nC k*))
⟶
(*nGet k t*) = [*s*] ∧
(∀ *j*. *j* < *n* ∧ *j* ≠ *k* ⟶
((*nStore j*) *t*) = ((*nReturn k*) *t*))))

— The predicate Broadcast describes properties of FlexRay broadcast.
definition
Broadcast ::
nat ⇒ *'a nFrame* ⇒ *'a Frame istream* ⇒ *bool*
where
Broadcast n nSend recv
≡
∀ (*t*::*nat*).
(*if* ∃ *k*. *k* < *n* ∧ ((*nSend k*) *t*) ≠ []
then (*recv t*) = ((*nSend* (*SOME k*. *k* < *n* ∧ ((*nSend k*) *t*) ≠ [])) *t*)
else (*recv t*) = [])

— The predicate Receive defines the relations on the streams to represent
— data receive by FlexRay controller.
definition
Receive ::
'a Frame istream ⇒ *'a Frame istream* ⇒ *nat istream* ⇒ *bool*
where
Receive recv store activation
≡
∀ (*t*::*nat*).
(*if* (*activation t*) = []
then (*store t*) = (*recv t*)
else (*store t*) = [])

— The predicate Send defines the relations on the streams to represent
— sending data by FlexRay controller.
definition
Send ::
'a Frame istream ⇒ *'a Frame istream* ⇒ *nat istream* ⇒ *nat istream* ⇒ *bool*
where
Send return send get activation
≡
∀ (*t*::*nat*).
(*if* (*activation t*) = []
then (*get t*) = [] ∧ (*send t*) = []
else (*get t*) = (*activation t*) ∧ (*send t*) = (*return t*))

11.2 Specifications of the FlexRay components

definition
FlexRay ::
nat ⇒ *'a nFrame* ⇒ *nConfig* ⇒ *'a nFrame* ⇒ *nNat* ⇒ *bool*
where
FlexRay n nReturn nC nStore nGet
≡
(*CorrectSheaf n*) ∧
((∀ (*i*::*nat*). *i* < *n* ⟶ (*msg 1* (*nReturn i*))) ∧
(*DisjointSchedules n nC*) ∧ (*IdenticCycleLength n nC*)

$\longrightarrow$
$(FrameTransmission\ n\ nStore\ nReturn\ nGet\ nC) \wedge$
$(\forall\ (i{::}nat).\ i < n \longrightarrow (msg\ 1\ (nGet\ i)) \wedge (msg\ 1\ (nStore\ i)))\ )$

definition
$Cable :: nat \Rightarrow 'a\ nFrame \Rightarrow 'a\ Frame\ istream \Rightarrow bool$
where
$Cable\ n\ nSend\ recv$
$\equiv$
$(CorrectSheaf\ n)$
$\wedge$
$((inf\text{-}disj\ n\ nSend) \longrightarrow (Broadcast\ n\ nSend\ recv))$

definition
$Scheduler :: Config \Rightarrow nat\ istream \Rightarrow bool$
where
$Scheduler\ c\ activation$
$\equiv$
$\forall\ (t{::}nat).$
$(\ let\ s = (t\ mod\ (cycleLength\ c))$
in
$(\ if\ \ (s\ mem\ (schedule\ c))$
$then\ (activation\ t) = [s]$
$else\ (activation\ t) = [])\ )$

definition
$BusInterface ::$
$nat\ istream \Rightarrow 'a\ Frame\ istream \Rightarrow 'a\ Frame\ istream \Rightarrow$
$'a\ Frame\ istream \Rightarrow 'a\ Frame\ istream \Rightarrow nat\ istream \Rightarrow bool$
where
$BusInterface\ activation\ return\ recv\ \ store\ send\ get$
$\equiv$
$(Receive\ recv\ store\ activation) \wedge$
$(Send\ return\ send\ get\ activation)$

definition
$FlexRayController ::$
$'a\ Frame\ istream \Rightarrow 'a\ Frame\ istream \Rightarrow\ \ Config \Rightarrow$
$'a\ Frame\ istream \Rightarrow 'a\ Frame\ istream \Rightarrow nat\ istream \Rightarrow bool$
where
$FlexRayController\ return\ recv\ c\ store\ send\ get$
$\equiv$
$(\exists\ \ activation.$
$(Scheduler\ c\ activation) \wedge$
$(BusInterface\ activation\ return\ recv\ store\ send\ get))$

definition
FlexRayArchitecture ::
nat ⇒ *'a nFrame* ⇒ *nConfig* ⇒ *'a nFrame* ⇒ *nNat* ⇒ *bool*
where
FlexRayArchitecture n nReturn nC nStore nGet
≡
(*CorrectSheaf n*) ∧
(∃ *nSend recv*.
(*Cable n nSend recv*) ∧
(∀ (*i*::*nat*). *i* < *n* ⟶
FlexRayController (*nReturn i*) *recv* (*nC i*)
(*nStore i*) (*nSend i*) (*nGet i*)))

definition
FlexRayArch ::
nat ⇒ *'a nFrame* ⇒ *nConfig* ⇒ *'a nFrame* ⇒ *nNat* ⇒ *bool*
where
FlexRayArch n nReturn nC nStore nGet
≡
(*CorrectSheaf n*) ∧
((∀ (*i*::*nat*). *i* < *n* ⟶ *msg 1* (*nReturn i*)) ∧
(*DisjointSchedules n nC*) ∧ (*IdenticCycleLength n nC*)
⟶
(*FlexRayArchitecture n nReturn nC nStore nGet*))

end

12 FlexRay: Verification

theory *FR-proof*
imports *FR*
begin

12.1 Properties of the function Send

lemma *Send-L1*:
assumes *h1*:*Send return send get activation*
and *h2*:*send t* ≠ []
shows (*activation t*) ≠ []
using *assms* **by** (*simp add*: *Send-def*, *auto*)

lemma *Send-L2*:
assumes *h1*:*Send return send get activation*
and *h2*:(*activation t*) ≠ []
and *h3*:*return t* ≠ []
shows (*send t*) ≠ []
using *assms* **by** (*simp add*: *Send-def*)

12.2 Properties of the component Scheduler

lemma *Scheduler-L1*:
assumes *h1*:*Scheduler C activation*
and *h2*:(*activation t*) ≠ []
shows (*t mod* (*cycleLength C*)) *mem* (*schedule C*)
using *assms*
proof −
{ **assume** *a1*:¬ *t mod cycleLength C mem schedule C*
from *h1* **have** *sg1*:
if t mod cycleLength C mem schedule C
then activation t = [*t mod cycleLength C*]
else activation t = []
by (*simp add*: *Scheduler-def Let-def*)
from *a1* **and** *sg1* **have** *sg2*:*activation t* = [] **by** *simp*
from *sg2* **and** *h2* **have** *sg3*:*False* **by** *simp*
} **from** *this* **have** *sg4*:(*t mod* (*cycleLength C*)) *mem* (*schedule C*) **by** *blast*
from *this* **show** *?thesis* **by** *simp*
qed

lemma *Scheduler-L2*:
assumes *h1*:*Scheduler C activation*
and *h2*:¬ (*t mod cycleLength C*) *mem* (*schedule C*)
shows *activation t* = []
using *assms* **by** (*simp add*: *Scheduler-def Let-def*)

lemma *Scheduler-L3*:
assumes *h1*:*Scheduler C activation*
and *h2*:(*t mod cycleLength C*) *mem* (*schedule C*)
shows *activation t* ≠ []
using *assms* **by** (*simp add*: *Scheduler-def Let-def*)

lemma *Scheduler-L4*:
assumes *h1*:*Scheduler C activation*
and *h2*:(*t mod cycleLength C*) *mem* (*schedule C*)
shows *activation t* = [*t mod cycleLength C*]
using *assms* **by** (*simp add*: *Scheduler-def Let-def*)

lemma *correct-DisjointSchedules1*:
assumes *h1*:*DisjointSchedules n nC*
and *h2*:*IdenticCycleLength n nC*
and *h3*:(*t mod cycleLength* (*nC i*)) *mem schedule* (*nC i*)
and *h4*:*i* < *n*
and *h5*:*j* < *n*
and *h6*:*i* ≠ *j*
shows ¬ (*t mod cycleLength* (*nC j*) *mem schedule* (*nC j*))

proof −
from *h1* **and** *h4* **and** *h5* **and** *h6* **have** *sg1*:*disjoint* (*schedule* (*nC i*)) (*schedule* (*nC j*))
by (*simp add*: *DisjointSchedules-def*)
from *h2* **and** *h4* **and** *h5* **have** *sg2*:*cycleLength* (*nC i*) = *cycleLength* (*nC j*)
by (*simp only*: *IdenticCycleLength-def*, *blast*)
from *sg1* **and** *h3* **have** *sg3*:¬ (*t mod* (*cycleLength* (*nC i*))) *mem* (*schedule* (*nC j*))
by (*simp add*: *mem-notdisjoint2*)
from *sg2* **and** *sg3* **show** *?thesis* **by** *simp*
qed

12.3 Disjoint Frames

lemma *disjointFrame-L1*:
assumes *h1*:*DisjointSchedules n nC*
and *h2*:*IdenticCycleLength n nC*
and *h3*:∀ *i* < *n*. *FlexRayController* (*nReturn i*) *rcv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h4*:*nSend i t* ≠ []
and *h5*:*i* < *n*
and *h6*:*j* < *n*
and *h7*:*i* ≠ *j*
shows *nSend j t* = []
proof −
from *h3* **and** *h5* **have** *sg1*:
FlexRayController (*nReturn i*) *rcv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
by *auto*
from *h3* **and** *h6* **have** *sg2*:
FlexRayController (*nReturn j*) *rcv* (*nC j*) (*nStore j*) (*nSend j*) (*nGet j*)
by *auto*
from *sg1* **obtain** *activation1* **where**
a1:*Scheduler* (*nC i*) *activation1* **and**
a2:*BusInterface activation1* (*nReturn i*) *rcv* (*nStore i*) (*nSend i*) (*nGet i*)
by (*simp add*: *FlexRayController-def*, *auto*)
from *sg2* **obtain** *activation2* **where**
a3:*Scheduler* (*nC j*) *activation2* **and**
a4:*BusInterface activation2* (*nReturn j*) *rcv* (*nStore j*) (*nSend j*) (*nGet j*)
by (*simp add*: *FlexRayController-def*, *auto*)
from *h1* **and** *h5* **and** *h6* **and** *h7* **have** *sg3*:*disjoint* (*schedule* (*nC i*)) (*schedule* (*nC j*))
by (*simp add*: *DisjointSchedules-def*)
from *a2* **have** *sg4a*:*Send* (*nReturn i*) (*nSend i*) (*nGet i*) *activation1*
by (*simp add*: *BusInterface-def*)
from *sg4a* **and** *h4* **have** *sg5*:*activation1 t* ≠ [] **by** (*simp add*: *Send-L1*)
from *a1* **and** *sg5* **have** *sg6*:(*t mod* (*cycleLength* (*nC i*))) *mem* (*schedule* (*nC i*))
by (*simp add*: *Scheduler-L1*)
from *h2* **and** *h5* **and** *h6* **have** *sg7*:*cycleLength* (*nC i*) = *cycleLength* (*nC j*)

by (*simp only*: *IdenticCycleLength-def*, *blast*)
from *sg3* **and** *sg6* **have** *sg8*:¬ (*t mod* (*cycleLength* (*nC i*))) *mem* (*schedule* (*nC j*))
by (*simp add*: *mem-notdisjoint2*)
from *sg8* **and** *sg7* **have** *sg9*:¬ (*t mod* (*cycleLength* (*nC j*))) *mem* (*schedule* (*nC j*))
by *simp*
from *sg9* **and** *a3* **have** *sg10*:*activation2 t* = [] **by** (*simp add*: *Scheduler-L2*)
from *a4* **have** *sg11*:*Send* (*nReturn j*) (*nSend j*) (*nGet j*) *activation2*
by (*simp add*: *BusInterface-def*)
from *sg11* **and** *sg10* **show** *?thesis* **by** (*simp add*: *Send-def*)
qed

lemma *disjointFrame-L2*:
assumes *h1*:*DisjointSchedules n nC*
and *h2*:*IdenticCycleLength n nC*
and *h3*:∀ *i* < *n*. *FlexRayController* (*nReturn i*) *rcv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
shows *inf-disj n nSend*
using *assms*
apply (*simp add*: *inf-disj-def*, *clarify*)
by (*rule disjointFrame-L1*, *auto*)

lemma *disjointFrame-L3*:
assumes *h1*:*DisjointSchedules n nC*
and *h2*:*IdenticCycleLength n nC*
and *h3*:∀ *i* < *n*. *FlexRayController* (*nReturn i*) *rcv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h4*:*t mod cycleLength* (*nC i*) *mem schedule* (*nC i*)
and *h5*:*i* < *n*
and *h6*:*j* < *n*
and *h7*:*i* ≠ *j*
shows *nSend j t* = []
proof −
from *h2* **and** *h5* **and** *h6* **have** *sg1*:*cycleLength* (*nC i*) = *cycleLength* (*nC j*)
by (*simp only*: *IdenticCycleLength-def*, *blast*)
from *h1* **and** *h5* **and** *h6* **and** *h7* **have** *sg2*:*disjoint* (*schedule* (*nC i*)) (*schedule* (*nC j*))
by (*simp add*: *DisjointSchedules-def*)
from *sg2* **and** *h4* **have** *sg3*:¬ (*t mod* (*cycleLength* (*nC i*))) *mem* (*schedule* (*nC j*))
by (*simp add*: *mem-notdisjoint2*)
from *sg1* **and** *sg3* **have** *sg4*:¬ (*t mod* (*cycleLength* (*nC j*))) *mem* (*schedule* (*nC j*))
by *simp*
from *h3* **and** *h6* **have** *sg5*:
FlexRayController (*nReturn j*) *rcv* (*nC j*) (*nStore j*) (*nSend j*) (*nGet j*)

by *auto*
from *sg5* **obtain** *activation2* **where**
a1:*Scheduler* (*nC j*) *activation2* **and**
a2:*BusInterface activation2* (*nReturn j*) *rcv* (*nStore j*) (*nSend j*) (*nGet j*)
by (*simp add*: *FlexRayController-def*, *auto*)
from *sg4* **and** *a1* **have** *sg6*:*activation2 t* = [] **by** (*simp add*: *Scheduler-L2*)
from *a2* **have** *sg7*:*Send* (*nReturn j*) (*nSend j*) (*nGet j*) *activation2*
by (*simp add*: *BusInterface-def*)
from *sg7* **and** *sg6* **show** *?thesis* **by** (*simp add*: *Send-def*)
qed

12.4 Properties of the sheaf of channels nSend

lemma *fr-Send1*:
assumes *h1*:*FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:¬ (*t mod cycleLength* (*nC i*) *mem schedule* (*nC i*))
shows (*nSend i*) *t* = []
proof −
from *h1* **obtain** *activation* **where**
a1:*Scheduler* (*nC i*) *activation* **and**
a2:*BusInterface activation* (*nReturn i*) *recv* (*nStore i*) (*nSend i*) (*nGet i*)
by (*simp add*: *FlexRayController-def*, *auto*)
from *a1* **and** *h2* **have** *sg1*:*activation t* = [] **by** (*simp add*: *Scheduler-L2*)
from *a2* **have** *sg2*:*Send* (*nReturn i*) (*nSend i*) (*nGet i*) *activation*
by (*simp add*: *BusInterface-def*)
from *sg2* **and** *sg1* **show** *?thesis* **by** (*simp add*: *Send-def*)
qed

lemma *fr-Send2*:
assumes *h1*:∀ *i*<*n*. *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:*DisjointSchedules n nC*
and *h3*:*IdenticCycleLength n nC*
and *h4*:*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*)
and *h5*:*k* < *n*
shows *nSend k t* = *nReturn k t*
using *assms*
proof −
from *h1* **and** *h5* **have** *sg1*:
FlexRayController (*nReturn k*) *recv* (*nC k*) (*nStore k*) (*nSend k*) (*nGet k*)
by *auto*
from *sg1* **obtain** *activation* **where**
a1:*Scheduler* (*nC k*) *activation* **and**
a2:*BusInterface activation* (*nReturn k*) *recv* (*nStore k*) (*nSend k*) (*nGet k*)
by (*simp add*: *FlexRayController-def*, *auto*)
from *a1* **and** *h4* **have** *sg3*:*activation t* ≠ [] **by** (*simp add*: *Scheduler-L3*)
from *a2* **have** *sg4*:*Send* (*nReturn k*) (*nSend k*) (*nGet k*) *activation*

by (*simp add*: *BusInterface-def*)
from *sg4* **and** *sg3* **show** *?thesis* **by** (*simp add*: *Send-def*)
qed

lemma *fr-Send3*:
assumes *h1*:$\forall\, i{<}n.$ *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:*DisjointSchedules n nC*
and *h3*:*IdenticCycleLength n nC*
and *h4*:*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*)
and *h5*:$k < n$
and *h6*:*nReturn k t* $\neq$ []
shows *nSend k t* $\neq$ []
using *assms* **by** (*simp add*: *fr-Send2*)

lemma *fr-Send4*:
assumes *h1*:$\forall\, i{<}n.$ *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:*DisjointSchedules n nC*
and *h3*:*IdenticCycleLength n nC*
and *h4*:*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*)
and *h5*:$k < n$
and *h6*:*nReturn k t* $\neq$ []
shows $\exists\, k.\ k < n \longrightarrow$ *nSend k t* $\neq$ []
proof
from *assms* **show** $k < n \longrightarrow$ *nSend k t* $\neq$ [] **by** (*simp add*: *fr-Send3*)
qed

lemma *fr-Send5*:
assumes *h1*:$\forall\, i{<}n.$ *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:*DisjointSchedules n nC*
and *h3*:*IdenticCycleLength n nC*
and *h4*:*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*)
and *h5*:$k < n$
and *h6*:*nReturn k t* $\neq$ []
and *h7*:$\forall\, k{<}n.$ *nSend k t* $=$ []
shows *False*
proof −
from *h1* **and** *h2* **and** *h3* **and** *h4* **and** *h5* **and** *h6* **have** *sg1*:*nSend k t* $\neq$ []
by (*simp add*: *fr-Send2*)
from *h7* **and** *h5* **have** *sg2*:*nSend k t* $=$ [] **by** *blast*
from *sg1* **and** *sg2* **show** *?thesis* **by** *simp*
qed

lemma *fr-Send6*:
assumes *h1*:$\forall\, i{<}n.$ *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:*DisjointSchedules n nC*
and *h3*:*IdenticCycleLength n nC*
and *h4*:*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*)
and *h5*:$k < n$
and *h6*:*nReturn k t* $\neq$ []
shows $\exists\, k{<}n.$ *nSend k t* $\neq$ []
proof (*rule ccontr*)
assume $\neg$ ($\exists\, k{<}n.$ *nSend k t* $\neq$ [])
from *this* **and** *assms* **show** *False*
apply *auto*
by (*rule fr-Send5*, *auto*)
qed

lemma *fr-Send7*:
assumes *h1*:$\forall\, i{<}n.$ *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:*DisjointSchedules n nC*
and *h3*:*IdenticCycleLength n nC*
and *h4*:*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*)
and *h5*:$k < n$
and *h6*:$j < n$
and *h6*:*nReturn k t* = []
shows *nSend j t* = []
using *assms*
proof (*cases* $j = k$)
assume *a1*: $j = k$
from *assms* **have** *sg1*: *nSend k t* = *nReturn k t* **by** (*simp add*: *fr-Send2*)
from *sg1* **and** *a1* **and** *h6* **show** *?thesis* **by** *simp*
next
assume *a2*:$j \neq k$
from *assms* **and** *a2* **show** *?thesis* **by** (*simp add*: *disjointFrame-L3*)
qed

lemma *fr-Send8*:
assumes *h1*:$\forall\, i{<}n.$ *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:*DisjointSchedules n nC*
and *h3*:*IdenticCycleLength n nC*
and *h4*:*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*)
and *h5*:$k < n$
and *h6*:*nReturn k t* = []
shows $\neg$ ($\exists\, k{<}n.$ *nSend k t* $\neq$ [])
using *assms* **by** (*auto*, *simp add*: *fr-Send7*)

lemma *fr-nC-Send*:
assumes *h1*:$\forall\, i{<}n.$ *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:$k < n$
and *h3*:*DisjointSchedules n nC*
and *h4*:*IdenticCycleLength n nC*
and *h5*:*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*)
shows $\forall\, j.\ j < n \wedge j \neq k \longrightarrow$ (*nSend j*) $t = []$
using *assms* **by** (*clarify*, *simp add*: *disjointFrame-L3*)

lemma *length-nSend*:
assumes *h1*:*BusInterface activation* (*nReturn i*) *recv* (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:$\forall\, t.$ *length* (*nReturn i t*) $\leq$ *Suc 0*
shows *length* (*nSend i t*) $\leq$ *Suc 0*
proof −
from *h1* **have** *sg1*:*Send* (*nReturn i*) (*nSend i*) (*nGet i*) *activation*
by (*simp add*: *BusInterface-def*)
from *sg1* **have** *sg2*:
if activation t $= []$ *then nGet i t* $= [] \wedge$ *nSend i t* $= []$
else nGet i t $=$ *activation t* $\wedge$ *nSend i t* $=$ *nReturn i t*
by (*simp add*: *Send-def*)
show *?thesis*
proof (*cases activation t* $= []$)
assume *a1*:*activation t* $= []$
from *sg2* **and** *a1* **show** *?thesis* **by** *simp*
next
assume *a2*:*activation t* $\neq []$
from *h2* **have** *sg3*:*length* (*nReturn i t*) $\leq$ *Suc 0* **by** *auto*
from *sg2* **and** *a2* **and** *sg3* **show** *?thesis* **by** *simp*
qed
qed

lemma *msg-nSend*:
assumes *h1*:*BusInterface activation* (*nReturn i*) *recv* (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:*msg* (*Suc 0*) (*nReturn i*)
shows *msg* (*Suc 0*) (*nSend i*)
using *assms* **by** (*simp add*: *msg-def*, *clarify*, *simp add*: *length-nSend*)

lemma *Broadcast-nSend-empty1*:
assumes *h1*:*Broadcast n nSend recv*
and *h2*:$\forall\, k{<}n.$ *nSend k t* $= []$
shows *recv t* $= []$
proof −

from *h1* **have** *sg1*:
if $\exists k{<}n.\ nSend\ k\ t \neq []$
then $recv\ t = nSend\ (SOME\ k.\ k < n \wedge nSend\ k\ t \neq [])\ t$
else $recv\ t = []$
by (*simp add*: *Broadcast-def*)
from *sg1* **and** *h2* **show** *?thesis* **by** *simp*
qed

12.5 Properties of the sheaf of channels nGet

lemma *fr-nGet1a*:
assumes *h1*:*FlexRayController* (*nReturn k*) *recv* (*nC k*) (*nStore k*) (*nSend k*) (*nGet k*)
and *h2*:*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*)
shows $nGet\ k\ t = [t\ mod\ cycleLength\ (nC\ k)]$
proof −
from *h1* **obtain** *activation1* **where**
a1:*Scheduler* (*nC k*) *activation1* **and**
a2:*BusInterface activation1* (*nReturn k*) *recv* (*nStore k*) (*nSend k*) (*nGet k*)
by (*simp add*: *FlexRayController-def*, *auto*)
from *a2* **have** *sg1*:*Send* (*nReturn k*) (*nSend k*) (*nGet k*) *activation1*
by (*simp add*: *BusInterface-def*)
from *sg1* **have** *sg2*:
if $activation1\ t = []$ *then* $nGet\ k\ t = [] \wedge nSend\ k\ t = []$
else $nGet\ k\ t = activation1\ t \wedge nSend\ k\ t = nReturn\ k\ t$
by (*simp add*: *Send-def*)
from *a1* **and** *h2* **have** *sg3*:$activation1\ t = [t\ mod\ cycleLength\ (nC\ k)]$
by (*simp add*: *Scheduler-L4*)
from *sg2* **and** *sg3* **show** *?thesis* **by** *simp*
qed

lemma *fr-nGet1*:
assumes *h1*:$\forall\ i{<}n.\ FlexRayController\ (nReturn\ i)\ recv\ (nC\ i)\ (nStore\ i)\ (nSend\ i)\ (nGet\ i)$
and *h2*:*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*)
and *h3*:$k < n$
shows $nGet\ k\ t = [t\ mod\ cycleLength\ (nC\ k)]$
proof −
from *h1* **and** *h3* **have** *sg1*:
FlexRayController (*nReturn k*) *recv* (*nC k*) (*nStore k*) (*nSend k*) (*nGet k*)
by *auto*
from *sg1* **and** *h2* **show** *?thesis* **by** (*rule fr-nGet1a*)
qed

lemma *fr-nGet2a*:
assumes *h1*:*FlexRayController* (*nReturn k*) *recv* (*nC k*) (*nStore k*) (*nSend k*) (*nGet k*)

and *h2*:¬ (*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*))
shows *nGet k t* = []
proof −
from *h1* **obtain** *activation1* **where**
a1:*Scheduler* (*nC k*) *activation1* **and**
a2:*BusInterface activation1* (*nReturn k*) *recv* (*nStore k*) (*nSend k*) (*nGet k*)
by (*simp add*: *FlexRayController-def*, *auto*)
from *a2* **have** *sg2*:*Send* (*nReturn k*) (*nSend k*) (*nGet k*) *activation1*
by (*simp add*: *BusInterface-def*)
from *sg2* **have** *sg3*:
if activation1 t = [] *then nGet k t* = [] ∧ *nSend k t* = []
else nGet k t = *activation1 t* ∧ *nSend k t* = *nReturn k t*
by (*simp add*: *Send-def*)
from *a1* **and** *h2* **have** *sg4*:*activation1 t* = []
by (*simp add*: *Scheduler-L2*)
from *sg3* **and** *sg4* **show** *?thesis* **by** *simp*
qed

lemma *fr-nGet2*:
assumes *h1*:∀ *i*<*n*. *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:¬ (*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*))
and *h3*:*k* < *n*
shows *nGet k t* = []
proof −
from *h1* **and** *h3* **have** *sg1*:
FlexRayController (*nReturn k*) *recv* (*nC k*) (*nStore k*) (*nSend k*) (*nGet k*)
by *auto*
from *sg1* **and** *h2* **show** *?thesis* **by** (*rule fr-nGet2a*)
qed

lemma *length-nGet1*:
assumes *h1*:*FlexRayController* (*nReturn k*) *recv* (*nC k*) (*nStore k*) (*nSend k*) (*nGet k*)
shows *length* (*nGet k t*) ≤ *Suc 0*
proof (*cases t mod cycleLength* (*nC k*) *mem schedule* (*nC k*))
assume *a1*:*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*)
from *h1* **and** *a1* **have** *sg1*:*nGet k t* = [*t mod cycleLength* (*nC k*)]
by (*rule fr-nGet1a*)
from *sg1* **show** *?thesis* **by** *auto*
next
assume *a2*:¬ (*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*))
from *h1* **and** *a2* **have** *sg2*:*nGet k t* = [] **by** (*rule fr-nGet2a*)
from *sg2* **show** *?thesis* **by** *auto*
qed

lemma *msg-nGet1*:
assumes *h1*:*FlexRayController* (*nReturn k*) *recv* (*nC k*) (*nStore k*) (*nSend k*) (*nGet k*)
shows *msg* (*Suc 0*) (*nGet k*)
using *assms* **by** (*simp add*: *msg-def*, *auto*, *rule length-nGet1*)

lemma *msg-nGet2*:
assumes *h1*:$\forall\, i{<}n$. *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:$k < n$
shows *msg* (*Suc 0*) (*nGet k*)
proof −
from *h1* **and** *h2* **have** *sg1*:
FlexRayController (*nReturn k*) *recv* (*nC k*) (*nStore k*) (*nSend k*) (*nGet k*)
by *auto*
from *sg1* **show** *?thesis* **by** (*rule msg-nGet1*)
qed

12.6 Properties of the sheaf of channels nStore

lemma *fr-nStore-nReturn1*:
assumes *h0*:*Broadcast n nSend recv*
and *h1*:*inf-disj n nSend*
and *h2*:$\forall\, i{<}n$. *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h3*:*DisjointSchedules n nC*
and *h4*:*IdenticCycleLength n nC*
and *h5*:*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*)
and *h6*:$k < n$
and *h7*:$j < n$
and *h8*:$j \neq k$
shows *nStore j t* = *nReturn k t*
proof −
from *h2* **and** *h6* **have** *sg1*:
FlexRayController (*nReturn k*) *recv* (*nC k*) (*nStore k*) (*nSend k*) (*nGet k*)
by *auto*
from *h2* **and** *h7* **have** *sg2*:
FlexRayController (*nReturn j*) *recv* (*nC j*) (*nStore j*) (*nSend j*) (*nGet j*)
by *auto*
from *sg1* **obtain** *activation1* **where**
a1:*Scheduler* (*nC k*) *activation1* **and**
a2:*BusInterface activation1* (*nReturn k*) *recv* (*nStore k*) (*nSend k*) (*nGet k*)
by (*simp add*: *FlexRayController-def*, *auto*)
from *sg2* **obtain** *activation2* **where**
a3:*Scheduler* (*nC j*) *activation2* **and**
a4:*BusInterface activation2* (*nReturn j*) *recv* (*nStore j*) (*nSend j*) (*nGet j*)
by (*simp add*: *FlexRayController-def*, *auto*)
from *a4* **have** *sg3*:*Receive recv* (*nStore j*) *activation2*

by (*simp add*: *BusInterface-def*)
from *this* **have** *sg4*:
if activation2 t = [] *then nStore j t* = *recv t else nStore j t* = []
by (*simp add*: *Receive-def*)
from *a1* **and** *h5* **have** *sg5*:*activation1 t* ≠ []
by (*simp add*: *Scheduler-L3*)
from *h4* **and** *h6* **and** *h7* **have** *sg6*:*cycleLength* (*nC k*) = *cycleLength* (*nC j*)
by (*simp only*: *IdenticCycleLength-def*, *blast*)
from *h3* **and** *h6* **and** *h7* **and** *h8* **have** *sg7*:*disjoint* (*schedule* (*nC k*)) (*schedule* (*nC j*))
by (*simp add*: *DisjointSchedules-def*)
from *sg7* **and** *h5* **have** *sg8*:
¬ (*t mod* (*cycleLength* (*nC k*))) *mem* (*schedule* (*nC j*))
by (*simp add*: *mem-notdisjoint2*)
from *sg6* **and** *sg8* **have** *sg9*:
¬ (*t mod* (*cycleLength* (*nC j*))) *mem* (*schedule* (*nC j*))
by *simp*
from *sg9* **and** *a3* **have** *sg10*:*activation2 t* = [] **by** (*simp add*: *Scheduler-L2*)
from *sg10* **and** *sg4* **have** *sg11*:*nStore j t* = *recv t* **by** *simp*
from *h0* **have** *sg15*:
if ∃ *k*<*n*. *nSend k t* ≠ []
then recv t = *nSend* (*SOME k*. *k* < *n* ∧ *nSend k t* ≠ []) *t*
else recv t = []
by (*simp add*: *Broadcast-def*)
show *?thesis*
proof (*cases nReturn k t* = [])
assume *a5*: *nReturn k t* = []
from *h2* **and** *h3* **and** *h4* **and** *h5* **and** *h6* **and** *a5* **have** *sg16*:
¬ (∃ *k*<*n*. *nSend k t* ≠ [])
by (*simp add*: *fr-Send8*)
from *sg16* **and** *sg15* **have** *sg17*:*recv t* = [] **by** *simp*
from *sg11* **and** *sg17* **have** *sg18*:*nStore j t* = [] **by** *simp*
from *this* **and** *a5* **show** *?thesis* **by** *simp*
next
assume *a6*:*nReturn k t* ≠ []
from *h2* **and** *h3* **and** *h4* **and** *h5* **and** *h6* **and** *a6* **have** *sg19*:
∃ *k*<*n*. *nSend k t* ≠ []
by (*simp add*: *fr-Send6*)
from *h2* **and** *h3* **and** *h4* **and** *h5* **and** *h6* **and** *a6* **have** *sg20*:*nSend k t* ≠ []
by (*simp add*: *fr-Send3*)
from *h1* **and** *sg20* **and** *h6* **have** *sg21*:(*SOME k*. *k* < *n* ∧ *nSend k t* ≠ []) = *k*
by (*simp add*: *inf-disj-index*)
from *sg15* **and** *sg19* **have** *sg22*:
recv t = *nSend* (*SOME k*. *k* < *n* ∧ *nSend k t* ≠ []) *t*
by *simp*
from *sg22* **and** *sg21* **have** *sg23*:*recv t* = *nSend k t* **by** *simp*
from *h2* **and** *h3* **and** *h4* **and** *h5* **and** *h6* **have** *sg24*:*nSend k t* = *nReturn k t*
by (*simp add*: *fr-Send2*)
from *sg11* **and** *sg23* **and** *sg24* **show** *?thesis* **by** *simp*

```
  qed
qed

lemma fr-nStore-nReturn2:
 assumes h1:Cable n nSend recv
     and h2:∀ i<n. FlexRayController (nReturn i) recv (nC i) (nStore i) (nSend
i) (nGet i)
     and h3:DisjointSchedules n nC
     and h4:IdenticCycleLength n nC
     and h5:t mod cycleLength (nC k) mem schedule (nC k)
     and h6:k < n
     and h7:j < n
     and h8:j ≠ k
 shows  nStore j t = nReturn k t
proof −
  from h1 have sg1:inf-disj n nSend ⟶ Broadcast n nSend recv
    by (simp add: Cable-def)
  from  h3 and h4 and h2 have sg2:inf-disj n nSend
    by (simp add: disjointFrame-L2)
  from sg1 and sg2 have sg3:Broadcast n nSend recv by simp
  from sg3 and sg2 and assms show ?thesis  by (simp add: fr-nStore-nReturn1)
qed

lemma fr-nStore-empty1:
 assumes h1:Cable n nSend recv
     and h2:∀ i<n. FlexRayController (nReturn i) recv (nC i) (nStore i) (nSend
i) (nGet i)
     and h3:DisjointSchedules n nC
     and h4:IdenticCycleLength n nC
     and h5:(t mod cycleLength (nC k) mem schedule (nC k))
     and h6:k < n
 shows  nStore k t = []
proof −
  from h2 and h6 have sg1:
    FlexRayController (nReturn k) recv (nC k) (nStore k) (nSend k) (nGet k)
    by auto
   from sg1 obtain activation1 where
     a1:Scheduler (nC k) activation1 and
     a2:BusInterface activation1 (nReturn k) recv (nStore k) (nSend k) (nGet k)
     by (simp add: FlexRayController-def, auto)
  from a2 have sg2:Receive recv (nStore k) activation1
     by (simp add: BusInterface-def)
  from this have sg3:
   if activation1 t = [] then nStore k t = recv t else nStore k t = []
    by (simp add: Receive-def)
  from a1 and h5 have sg4:activation1 t ≠ []
     by (simp add: Scheduler-L3)
 from sg3 and sg4 show ?thesis by simp
qed
```

lemma *fr-nStore-nReturn3*:
assumes *h1*:*Cable n nSend recv*
and *h2*:∀ *i*<*n*. *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h3*:*DisjointSchedules n nC*
and *h4*:*IdenticCycleLength n nC*
and *h5*:*t mod cycleLength* (*nC k*) *mem schedule* (*nC k*)
and *h6*:*k* < *n*
shows ∀ *j*. *j* < *n* ∧ *j* ≠ *k* ⟶ *nStore j t* = *nReturn k t*
using *assms*
by (*clarify*, *simp add*: *fr-nStore-nReturn2*)

lemma *length-nStore*:
assumes *h1*:∀ *i*<*n*. *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:*DisjointSchedules n nC*
and *h3*:*IdenticCycleLength n nC*
and *h4*:*inf-disj n nSend*
and *h5*:*i* < *n*
and *h6*:∀ *i*<*n*. *msg* (*Suc 0*) (*nReturn i*)
and *h7*:*Broadcast n nSend recv*
shows *length* (*nStore i t*) ≤ *Suc 0*
proof −
from *h7* **have** *sg1*:
if ∃ *k*<*n*. *nSend k t* ≠ []
then recv t = *nSend* (*SOME k*. *k* < *n* ∧ *nSend k t* ≠ []) *t*
else recv t = []
by (*simp add*: *Broadcast-def*)
show *?thesis*
proof (*cases* ∃ *k*<*n*. *nSend k t* ≠ [])
assume *a1*:∃ *k*<*n*. *nSend k t* ≠ []
from *a1* **obtain** *k* **where** *a2*:*k*<*n* **and** *a3*:*nSend k t* ≠ [] **by** *auto*
from *h1* **and** *a2* **have** *sg4*:
FlexRayController (*nReturn k*) *recv* (*nC k*) (*nStore k*) (*nSend k*) (*nGet k*)
by *auto*
from *sg4* **obtain** *activation1* **where**
a4:*Scheduler* (*nC k*) *activation1* **and**
a5:*BusInterface activation1* (*nReturn k*) *recv* (*nStore k*) (*nSend k*) (*nGet k*)
by (*simp add*: *FlexRayController-def*, *auto*)
from *a5* **have** *sg5*:*Send* (*nReturn k*) (*nSend k*) (*nGet k*) *activation1*
by (*simp add*: *BusInterface-def*)
from *a5* **have** *sg6*:*Receive recv* (*nStore k*) *activation1*
by (*simp add*: *BusInterface-def*)
from *sg5* **and** *a3* **have** *sg7*:(*activation1 t*) ≠ [] **by** (*simp add*: *Send-L1*)
from *sg6* **have** *sg8*:
if activation1 t = []

then nStore k t = recv t else nStore k t = []
by (*simp add*: *Receive-def*)
from *sg8* **and** *sg7* **have** *sg9*:*nStore k t = []* **by** *simp*
from *a4* **and** *sg7* **have** *sg10*:(*t mod* (*cycleLength* (*nC k*))) *mem* (*schedule* (*nC k*))
by (*simp add*: *Scheduler-L1*)
show *?thesis*
proof (*cases i = k*)
assume *aa1*: *i = k*
from *sg9* **and** *aa1* **show** *?thesis* **by** *simp*
next
assume *aa2*:*i ≠ k*
from *h7* **and** *h4* **and** *h1* **and** *h2* **and** *h3* **and** *sg10* **and** *a2* **and** *h5* **and** *aa2* **have** *sg11*:
nStore i t = nReturn k t
by (*simp add*: *fr-nStore-nReturn1*)
from *h6* **and** *a2* **have** *sg12*:*msg* (*Suc 0*) (*nReturn k*) **by** *auto*
from *a2* **and** *h6* **have** *sg13*:*length* (*nReturn k t*) ≤ *Suc 0*
by (*simp add*: *msg-def*)
from *sg11* **and** *sg13* **show** *?thesis* **by** *simp*
qed
next
assume *a10*:¬ (∃ *k*<*n*. *nSend k t ≠ []*)
from *h7* **and** *a10* **have** *sg14*:*recv t = []* **by** (*simp add*: *Broadcast-nSend-empty1*)
from *h1* **and** *h5* **have** *sg15*:
FlexRayController (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
by *auto*
from *sg15* **obtain** *activation2* **where**
a11:*Scheduler* (*nC i*) *activation2* **and**
a12:*BusInterface activation2* (*nReturn i*) *recv* (*nStore i*) (*nSend i*) (*nGet i*)
by (*simp add*: *FlexRayController-def*, *auto*)
from *a12* **have** *sg16*:*Receive recv* (*nStore i*) *activation2*
by (*simp add*: *BusInterface-def*)
from *sg16* **have** *sg17*:
if activation2 t = []
then nStore i t = recv t else nStore i t = []
by (*simp add*: *Receive-def*)
show *?thesis*
proof (*cases activation2 t = []*)
assume *aa3*:*activation2 t = []*
from *sg17* **and** *aa3* **and** *sg14* **have** *sg18*:*nStore i t = []* **by** *simp*
from *this* **show** *?thesis* **by** *simp*
next
assume *aa4*:*activation2 t ≠ []*
from *sg17* **and** *aa4* **have** *sg18*:*nStore i t = []* **by** *simp*
from *this* **show** *?thesis* **by** *simp*
qed
qed
qed

lemma *msg-nStore*:
assumes *h1*: $\forall\, i{<}n$. *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h2*:*DisjointSchedules n nC*
and *h3*:*IdenticCycleLength n nC*
and *h4*:*inf-disj n nSend*
and *h5*:$i < n$
and *h6*:$\forall\ i{<}n$. *msg* (*Suc 0*) (*nReturn i*)
and *h7*:*Cable n nSend recv*
shows *msg* (*Suc 0*) (*nStore i*)
using *assms*
apply (*simp* (*no-asm*) *add*: *msg-def*, *simp add*: *Cable-def*, *clarify*)
by (*simp add*: *length-nStore*)

12.7 Refinement Properties

lemma *fr-refinement-FrameTransmission*:
assumes *h1*:*Cable n nSend recv*
and *h2*:$\forall\, i{<}n$. *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
and *h3*:*DisjointSchedules n nC*
and *h4*:*IdenticCycleLength n nC*
shows *FrameTransmission n nStore nReturn nGet nC*
using *assms*
apply (*simp add*: *FrameTransmission-def Let-def*, *auto*)
apply (*simp add*: *fr-nGet1*)
by (*simp add*: *fr-nStore-nReturn3*)

lemma *FlexRayArch-CorrectSheaf*:
assumes *h1*:*FlexRayArch n nReturn nC nStore nGet*
shows *CorrectSheaf n*
using *assms* **by** (*simp add*: *FlexRayArch-def*)

lemma *FlexRayArch-FrameTransmission*:
assumes *h1*:*FlexRayArch n nReturn nC nStore nGet*
and *h2*:$\forall\, i{<}n$. *msg* (*Suc 0*) (*nReturn i*)
and *h3*:*DisjointSchedules n nC*
and *h4*:*IdenticCycleLength n nC*
shows *FrameTransmission n nStore nReturn nGet nC*
proof −
from *assms* **obtain** *nSend recv* **where**
a1:*Cable n nSend recv* **and**
a2:$\forall\, i{<}n$. *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*) **by** (*simp add*: *FlexRayArch-def FlexRayArchitecture-def*, *auto*)
from *a1* **and** *a2* **and** *h3* **and** *h4* **show** *?thesis*
by (*rule fr-refinement-FrameTransmission*)
qed

lemma *FlexRayArch-nGet*:
assumes *h1*:*FlexRayArch n nReturn nC nStore nGet*
and *h2*:∀ *i*<*n*. *msg* (*Suc 0*) (*nReturn i*)
and *h3*:*DisjointSchedules n nC*
and *h4*:*IdenticCycleLength n nC*
and *h5*:*i* < *n*
shows *msg* (*Suc 0*) (*nGet i*)
proof −
from *assms* **obtain** *nSend recv* **where**
a1:*Cable n nSend recv* **and**
a2:∀ *i*<*n*. *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
by (*simp add*: *FlexRayArch-def FlexRayArchitecture-def*, *auto*)
from *a2* **and** *h5* **show** *?thesis* **by** (*rule msg-nGet2*)
qed

lemma *FlexRayArch-nStore*:
assumes *h1*:*FlexRayArch n nReturn nC nStore nGet*
and *h2*:∀ *i*<*n*. *msg* (*Suc 0*) (*nReturn i*)
and *h3*:*DisjointSchedules n nC*
and *h4*:*IdenticCycleLength n nC*
and *h5*:*i* < *n*
shows *msg* (*Suc 0*) (*nStore i*)
proof −
from *assms* **obtain** *nSend recv* **where**
a1:*Cable n nSend recv* **and**
a2:∀ *i*<*n*. *FlexRayController* (*nReturn i*) *recv* (*nC i*) (*nStore i*) (*nSend i*) (*nGet i*)
by (*simp add*: *FlexRayArch-def FlexRayArchitecture-def*, *auto*)
from *h3* **and** *h4* **and** *a2* **have** *sg1*:*inf-disj n nSend* **by** (*simp add*: *disjointFrame-L2*)
from *a2* **and** *h3* **and** *h4* **and** *sg1* **and** *h5* **and** *h2* **and** *a1* **show** *?thesis*
by (*rule msg-nStore*)
qed

theorem *main-fr-refinement*:
assumes *h1*:*FlexRayArch n nReturn nC nStore nGet*
shows *FlexRay n nReturn nC nStore nGet*
using *assms*
by (*simp add*: *FlexRay-def*
FlexRayArch-CorrectSheaf
FlexRayArch-FrameTransmission
FlexRayArch-nGet
FlexRayArch-nStore)

end

13 Gateway: Types

theory *Gateway-types*
imports *stream*
begin

type-synonym
  Coordinates = *nat* × *nat*
type-synonym
  CollisionSpeed = *nat*

record *ECall-Info* =
  coord :: *Coordinates*
  speed :: *CollisionSpeed*

datatype *GatewayStatus* =
   init-state
 | *call*
 | *connection-ok*
 | *sending-data*
 | *voice-com*

datatype *reqType* = *init* | *send*
datatype *stopType* = *stop-vc*
datatype *vcType* = *vc-com*
datatype *aType* = *sc-ack*

end

14 Gateway: Specification

theory *Gateway*
imports *Gateway-types*
begin

definition
 ServiceCenter ::
  ECall-Info istream ⇒ *aType istream* ⇒ *bool*
where
 ServiceCenter i a
 ≡
 ∀ (*t*::*nat*).
 a 0 = [] ∧ *a* (*Suc t*) = (*if* (*i t*) = [] *then* [] *else* [*sc-ack*])

definition
 Loss ::
  bool istream ⇒ *aType istream* ⇒ *ECall-Info istream* ⇒
   aType istream ⇒ *ECall-Info istream* ⇒ *bool*
where

Loss lose a i2 a2 i
≡
∀ (*t*::*nat*).
(*if lose t* = [*False*]
then a2 t = *a t* ∧ *i t* = *i2 t*
else a2 t = [] ∧ *i t* = [])

definition
Delay ::
aType istream ⇒ *ECall-Info istream* ⇒ *nat* ⇒
aType istream ⇒ *ECall-Info istream* ⇒ *bool*
where
Delay a2 i1 d a1 i2
≡
∀ (*t*::*nat*).
(*t* < *d* ⟶ *a1 t* = [] ∧ *i2 t* = []) ∧
(*t* ≥ *d* ⟶ (*a1 t* = *a2* (*t*−*d*)) ∧ (*i2 t* = *i1* (*t*−*d*)))

definition
tiTable-SampleT ::
reqType istream ⇒ *aType istream* ⇒
stopType istream ⇒ *bool istream* ⇒
(*nat* ⇒ *GatewayStatus*) ⇒ (*nat* ⇒ *ECall-Info list*) ⇒
GatewayStatus istream ⇒ *ECall-Info istream* ⇒ *vcType istream*
⇒ (*nat* ⇒ *GatewayStatus*) ⇒ *bool*
where
tiTable-SampleT req a1 stop lose st-in buffer-in
ack i1 vc st-out
≡
∀ (*t*::*nat*)
(*r*::*reqType list*) (*x*::*aType list*)
(*y*::*stopType list*) (*z*::*bool list*).
(∗*1*∗)
(*st-in t* = *init-state* ∧ *req t* = [*init*]
⟶ *ack t* = [*call*] ∧ *i1 t* = [] ∧ *vc t* = []
∧ *st-out t* = *call*)
∧
(∗*2*∗)
(*st-in t* = *init-state* ∧ *req t* ≠ [*init*]
⟶ *ack t* = [*init-state*] ∧ *i1 t* = [] ∧ *vc t* = []
∧ *st-out t* = *init-state*)
∧
(∗*3*∗)
((*st-in t* = *call* ∨ (*st-in t* = *connection-ok* ∧ *r* ≠ [*send*])) ∧
req t = *r* ∧ *lose t* = [*False*]
⟶ *ack t* = [*connection-ok*] ∧ *i1 t* = [] ∧ *vc t* = []
∧ *st-out t* = *connection-ok*)
∧
(∗*4*∗)

$(\ (st\text{-}in\ t = call \lor st\text{-}in\ t = connection\text{-}ok \lor st\text{-}in\ t = sending\text{-}data)$
$\ \ \land\ lose\ t = [True]$
$\ \ \longrightarrow\ \ ack\ t = [init\text{-}state] \land i1\ t = [] \land vc\ t = []$
$\ \ \ \ \land\ st\text{-}out\ t = init\text{-}state\ )$
$\land$
$(*5*)$
$(\ st\text{-}in\ t = connection\text{-}ok \land req\ t = [send] \land lose\ t = [False]$
$\ \ \longrightarrow ack\ t = [sending\text{-}data] \land i1\ t = buffer\text{-}in\ t \land vc\ t = []$
$\ \ \ \ \land\ st\text{-}out\ t = sending\text{-}data\ )$
$\land$
$(*6*)$
$(\ st\text{-}in\ t = sending\text{-}data \land a1\ t = [] \land lose\ t = [False]$
$\ \ \longrightarrow ack\ t = [sending\text{-}data] \land i1\ t = [] \land vc\ t = []$
$\ \ \ \ \land\ st\text{-}out\ t = sending\text{-}data\ )$
$\land$
$(*7*)$
$(\ st\text{-}in\ t = sending\text{-}data \land a1\ t = [sc\text{-}ack] \land lose\ t = [False]$
$\ \ \longrightarrow ack\ t = [voice\text{-}com] \land i1\ t = [] \land vc\ t = [vc\text{-}com]$
$\ \ \ \ \land\ st\text{-}out\ t = voice\text{-}com\ )$
$\land$
$(*8*)$
$(\ st\text{-}in\ t = voice\text{-}com \land stop\ t = [] \land lose\ t = [False]$
$\ \ \longrightarrow ack\ t = [voice\text{-}com] \land i1\ t = [] \land vc\ t = [vc\text{-}com]$
$\ \ \ \ \land\ st\text{-}out\ t = voice\text{-}com\ )$
$\land$
$(*9*)$
$(\ st\text{-}in\ t = voice\text{-}com \land stop\ t = [] \land lose\ t = [True]$
$\ \ \longrightarrow ack\ t = [voice\text{-}com] \land i1\ t = [] \land vc\ t = []$
$\ \ \ \ \land\ st\text{-}out\ t = voice\text{-}com\ )$
$\land$
$(*10*)$
$(\ st\text{-}in\ t = voice\text{-}com \land stop\ t = [stop\text{-}vc]$
$\ \ \longrightarrow ack\ t = [init\text{-}state] \land i1\ t = [] \land vc\ t = []$
$\ \ \ \ \land\ st\text{-}out\ t = init\text{-}state\ )$

definition
$Sample\text{-}L ::$
$reqType\ istream\ \Rightarrow\ ECall\text{-}Info\ istream \Rightarrow aType\ istream \Rightarrow$
$stopType\ istream \Rightarrow bool\ istream \Rightarrow$
$(nat \Rightarrow GatewayStatus) \Rightarrow\ (nat \Rightarrow ECall\text{-}Info\ list) \Rightarrow$
$GatewayStatus\ istream \Rightarrow ECall\text{-}Info\ istream \Rightarrow vcType\ istream$
$\Rightarrow (nat \Rightarrow GatewayStatus)\ \Rightarrow (nat \Rightarrow ECall\text{-}Info\ list)$
$\Rightarrow bool$
where
$Sample\text{-}L\ req\ dt\ a1\ stop\ lose\ st\text{-}in\ buffer\text{-}in$
$\ \ \ \ ack\ i1\ vc\ st\text{-}out\ buffer\text{-}out$
$\equiv$
$(\forall\ (t{::}nat).$
$\ buffer\text{-}out\ t =$

```
   (if dt t = [] then buffer-in t  else dt t) )
  ∧
  (tiTable-SampleT req a1 stop lose st-in buffer-in
                   ack i1 vc st-out)

definition
 Sample ::
 reqType istream  ⇒ ECall-Info istream ⇒ aType istream ⇒
  stopType istream ⇒ bool istream ⇒
  GatewayStatus istream ⇒ ECall-Info istream ⇒ vcType istream
  ⇒ bool
where
 Sample req dt a1 stop lose  ack i1 vc
  ≡
  ((msg (1::nat) req) ∧
   (msg (1::nat) a1)  ∧
   (msg (1::nat) stop))
  ⟶
  (∃ st buffer.
  (Sample-L req dt a1 stop lose
            (fin-inf-append [init-state] st)
            (fin-inf-append [[]] buffer)
            ack i1 vc st buffer) )

definition
 Gateway ::
   reqType istream ⇒ ECall-Info istream ⇒ aType istream ⇒
    stopType istream ⇒ bool istream ⇒ nat ⇒
    GatewayStatus istream ⇒ ECall-Info istream ⇒ vcType istream
    ⇒ bool
where
 Gateway req dt a stop lose d ack i vc
  ≡ ∃ i1 i2 x y.
    (Sample req dt x stop lose ack i1 vc) ∧
    (Delay y i1 d x i2) ∧
    (Loss lose a i2 y i)

definition
  GatewaySystem ::
   reqType istream ⇒ ECall-Info istream ⇒
    stopType istream ⇒ bool istream ⇒ nat ⇒
    GatewayStatus istream ⇒ vcType istream
    ⇒ bool
where
 GatewaySystem req dt stop lose d ack vc
  ≡
  ∃ a i.
 (Gateway req dt a stop lose d ack i vc) ∧
 (ServiceCenter i a)
```

definition
GatewayReq ::
reqType istream ⇒ *ECall-Info istream* ⇒ *aType istream* ⇒
stopType istream ⇒ *bool istream* ⇒ *nat* ⇒
GatewayStatus istream ⇒ *ECall-Info istream* ⇒ *vcType istream*
⇒ *bool*
where
GatewayReq req dt a stop lose d ack i vc
≡
((*msg* (*1*::*nat*) *req*) ∧ (*msg* (*1*::*nat*) *a*) ∧
(*msg* (*1*::*nat*) *stop*) ∧ (*ts lose*))
⟶
(∀ (*t*::*nat*).
(*ack t* = [*init-state*] ∧ *req* (*Suc t*) = [*init*] ∧
lose (*t*+*1*) = [*False*] ∧ *lose* (*t*+*2*) = [*False*]
⟶ *ack* (*t*+*2*) = [*connection-ok*])
∧
(*ack t* = [*connection-ok*] ∧ *req* (*Suc t*) = [*send*] ∧
(∀ (*k*::*nat*). *k* ≤ (*d*+*1*) ⟶ *lose* (*t*+*k*) = [*False*])
⟶ *i* ((*Suc t*) + *d*) = *inf-last-ti dt t*
∧ *ack* (*Suc t*) = [*sending-data*])
∧
(*ack* (*t*+*d*) = [*sending-data*] ∧ *a* (*Suc t*) = [*sc-ack*] ∧
(∀ (*k*::*nat*). *k* ≤ (*d*+*1*) ⟶ *lose* (*t*+*k*) = [*False*])
⟶ *vc* ((*Suc t*) + *d*) = [*vc-com*]))

definition
GatewaySystemReq ::
reqType istream ⇒ *ECall-Info istream* ⇒
stopType istream ⇒ *bool istream* ⇒ *nat* ⇒
GatewayStatus istream ⇒ *vcType istream*
⇒ *bool*
where
GatewaySystemReq req dt stop lose d ack vc
≡
((*msg* (*1*::*nat*) *req*) ∧ (*msg* (*1*::*nat*) *stop*) ∧ (*ts lose*))
⟶
(∀ (*t*::*nat*) (*k*::*nat*).
(*ack t* = [*init-state*] ∧ *req* (*Suc t*) = [*init*]
∧ (∀ *t1*. *t1* ≤ *t* ⟶ *req t1* = [])
∧ *req* (*t*+*2*) = []
∧ (∀ *m*. *m* < *k* + *3* ⟶ *req* (*t* + *m*) ≠ [*send*])
∧ *req* (*t*+*3*+*k*) = [*send*] ∧ *inf-last-ti dt* (*t*+*2*) ≠ []
∧ (∀ (*j*::*nat*).
j ≤ (*4* + *k* + *d* + *d*) ⟶ *lose* (*t*+*j*) = [*False*])
⟶ *vc* (*t* + *4* + *k* + *d* + *d*) = [*vc-com*]))

end

15 Gateway: Verification

theory *Gateway-proof-aux*
imports *Gateway BitBoolTS*
begin

15.1 Properties of the defined data types

lemma *aType-empty*:
assumes *h1*:*msg* (*Suc 0*) *a*
and *h2*: *a t* ≠ [*sc-ack*]
shows *a t* = []
proof (*cases a t*)
assume *a1*:*a t* = []
from *this* **show** *?thesis* **by** *simp*
next
fix *aa l*
assume *a2*:*a t* = *aa* # *l*
show *?thesis*
proof (*cases aa*)
assume *a3*:*aa* = *sc-ack*
from *h1* **have** *sg1*:*length* (*a t*) ≤ *Suc 0* **by** (*simp add*: *msg-def*)
from *this* **and** *h1* **and** *h2* **and** *a2* **and** *a3* **show** *?thesis* **by** *auto*
qed
qed

lemma *aType-nonempty*:
assumes *h1*:*msg* (*Suc 0*) *a*
and *h2*: *a t* ≠ []
shows *a t* = [*sc-ack*]
proof (*cases a t*)
assume *a1*:*a t* = []
from *this* **and** *h2* **show** *?thesis* **by** *simp*
next
fix *aa l*
assume *a2*:*a t* = *aa* # *l*
from *a2* **and** *h1* **have** *sg1*: *l* = [] **by** (*simp add*: *msg-nonempty1*)
from *a2* **and** *h1* **and** *sg1* **show** *?thesis*
proof (*cases aa*)
assume *a3*:*aa* = *sc-ack*
from *this* **and** *sg1* **and** *h2* **and** *a2* **show** *?thesis* **by** *simp*
qed
qed

lemma *aType-lemma*:
assumes *h1*:*msg* (*Suc 0*) *a*
shows *a t* = [] ∨ *a t* = [*sc-ack*]
using *assms*
apply *auto*
by (*simp add*: *aType-empty*)

lemma *stopType-empty*:
assumes *h1*:*msg* (*Suc 0*) *a*
and *h2*:*a t* ≠ [*stop-vc*]
shows *a t* = []
proof (*cases a t*)
assume *a1*:*a t* = []
from *this* **show** *?thesis* **by** *simp*
next
fix *aa l*
assume *a2*:*a t* = *aa* # *l*
show *?thesis*
proof (*cases aa*)
assume *a3*:*aa* = *stop-vc*
from *h1* **have** *sg1*:*length* (*a t*) ≤ *Suc 0* **by** (*simp add*: *msg-def*)
from *this* **and** *h1* **and** *h2* **and** *a2* **and** *a3* **show** *?thesis* **by** *auto*
qed
qed

lemma *stopType-nonempty*:
assumes *h1*:*msg* (*Suc 0*) *a*
and *h2*:*a t* ≠ []
shows *a t* = [*stop-vc*]
proof (*cases a t*)
assume *a1*:*a t* = []
from *this* **and** *h2* **show** *?thesis* **by** *simp*
next
fix *aa l*
assume *a2*:*a t* = *aa* # *l*
show *?thesis*
proof (*cases aa*)
assume *a3*:*aa* = *stop-vc*
from *h1* **have** *sg1*:*length* (*a t*) ≤ *Suc 0* **by** (*simp add*: *msg-def*)
from *this* **and** *h1* **and** *h2* **and** *a2* **and** *a3* **show** *?thesis* **by** *auto*
qed
qed

lemma *stopType-lemma*:
assumes *h1*:*msg* (*Suc 0*) *a*
shows *a t* = [] ∨ *a t* = [*stop-vc*]
using *assms*
apply *auto*
by (*simp add*: *stopType-empty*)

lemma *vcType-empty*:
assumes *h1*:*msg* (*Suc 0*) *a*
and *h2*:*a t* ≠ [*vc-com*]
shows*a t* = []
proof (*cases a t*)

```
  assume a1:a t = []
  from this show ?thesis by simp
next
  fix aa l
  assume a2:a t = aa # l
  show ?thesis
    proof (cases aa)
      assume a3:aa = vc-com
      from h1 have sg1:length (a t) ≤ Suc 0 by (simp add: msg-def)
      from this and h1 and h2 and a2 and a3 show ?thesis by auto
    qed
qed

lemma vcType-lemma:
  assumes h1:msg (Suc 0) a
  shows       a t = [] ∨ a t = [vc-com]
using assms
  apply auto
  by (simp add: vcType-empty)
```

15.2 Properties of the Delay component

```
lemma Delay-L1:
 assumes h1:∀ t1 < t. i1 t1 = []
     and h2:Delay y i1 d x i2
     and h3:t2 < t + d
   shows i2 t2 = []
proof (cases t2 < d)
  assume a1:t2 < d
  from h2 have sg1:t2 < d ⟶ i2 t2 = []
    by (simp add: Delay-def)
  from sg1 and a1 show ?thesis by simp
next
  assume a2:¬ t2 < d
  from h2 have sg2:d ≤ t2 ⟶ i2 t2 = i1 (t2 − d)
    by (simp add: Delay-def)
  from a2 and sg2 have sg3:i2 t2 = i1 (t2 − d) by simp
  from h1 and a2 and h3 and sg3 show ?thesis by auto
qed


lemma Delay-L2:
 assumes h1:∀ t1 < t. i1 t1 = []
     and h2:Delay y i1 d x i2
   shows ∀ t2 < t + d. i2 t2 = []
using assms by (clarify, rule Delay-L1, auto)


lemma Delay-L3:
```

assumes *h1*:$\forall\, t1 \leq t.\ y\ t1 = []$
and *h2*:*Delay y i1 d x i2*
and *h3*:$t2 \leq t + d$
shows $x\ t2 = []$
proof (*cases* $t2 < d$)
assume *a1*:$t2 < d$
from *h2* **have** *sg1*:$t2 < d \longrightarrow x\ t2 = []$
by (*simp add*: *Delay-def*)
from *sg1* **and** *a1* **show** *?thesis* **by** *simp*
next
assume *a2*:$\neg\ t2 < d$
from *h2* **have** *sg2*:$d \leq t2 \longrightarrow x\ t2 = y\ (t2 - d)$
by (*simp add*: *Delay-def*)
from *a2* **and** *sg2* **have** *sg3*:$x\ t2 = y\ (t2 - d)$ **by** *simp*
from *h1* **and** *a2* **and** *h3* **and** *sg3* **show** *?thesis* **by** *auto*
qed

lemma *Delay-L4*:
assumes *h1*:$\forall\, t1 \leq t.\ y\ t1 = []$
and *h2*:*Delay y i1 d x i2*
shows $\forall\, t2 \leq t + d.\ x\ t2 = []$
using *assms* **by** (*clarify*, *rule Delay-L3*, *auto*)

lemma *Delay-lengthOut1*:
assumes *h1*:$\forall\, t.\ length\ (x\ t) \leq Suc\ 0$
and *h2*:*Delay x i1 d y i2*
shows $length\ (y\ t) \leq Suc\ 0$
proof (*cases* $t < d$)
assume *a1*:$t < d$
from *h2* **have** *sg1*:$t < d \longrightarrow y\ t = []$
by (*simp add*: *Delay-def*)
from *a1* **and** *sg1* **show** *?thesis* **by** *auto*
next
assume *a2*:$\neg\ t < d$
from *h2* **have** *sg2*:$t \geq d \longrightarrow (y\ t = x\ (t-d))$
by (*simp add*: *Delay-def*)
from *a2* **and** *sg2* **and** *h1* **show** *?thesis* **by** *auto*
qed

lemma *Delay-msg1*:
assumes *h1*:$msg\ (Suc\ 0)\ x$
and *h2*:*Delay x i1 d y i2*
shows $msg\ (Suc\ 0)\ y$
using *assms*
by (*simp add*: *msg-def Delay-lengthOut1*)

15.3 Properties of the Loss component

lemma *Loss-L1*:
assumes *h1*:$\forall$ *t2*<*t*. *i2 t2* = []
and *h2*:*Loss lose a i2 y i*
and *h3*:*t2* < *t*
and *h4*:*ts lose*
shows *i t2* = []
proof (*cases lose t2* = [*False*])
assume *a1*:*lose t2* = [*False*]
from *assms* **and** *a1* **show** *?thesis* **by** (*simp add*: *Loss-def*)
next
assume *a2*:*lose t2* ≠ [*False*]
from *a2* **and** *h4* **have** *sg1*:*lose t2* = [*True*] **by** (*simp add*: *ts-bool-True*)
from *assms* **and** *sg1* **show** *?thesis* **by** (*simp add*: *Loss-def*)
qed

lemma *Loss-L2*:
assumes *h1*:$\forall$ *t2*<*t*. *i2 t2* = []
and *h2*:*Loss lose a i2 y i*
and *h3*:*ts lose*
shows $\forall$ *t2*<*t*. *i t2* = []
using *assms*
apply *clarify*
by (*rule Loss-L1*, *auto*)

lemma *Loss-L3*:
assumes *h1*:$\forall$ *t2*<*t*. *a t2* = []
and *h2*:*Loss lose a i2 y i*
and *h3*:*t2* < *t*
and *h4*:*ts lose*
shows *y t2* = []
proof (*cases lose t2* = [*False*])
assume *a1*:*lose t2* = [*False*]
from *assms* **and** *a1* **show** *?thesis* **by** (*simp add*: *Loss-def*)
next
assume *a2*:*lose t2* ≠ [*False*]
from *a2* **and** *h4* **have** *sg1*:*lose t2* = [*True*] **by** (*simp add*: *ts-bool-True*)
from *assms* **and** *sg1* **show** *?thesis* **by** (*simp add*: *Loss-def*)
qed

lemma *Loss-L4*:
assumes *h1*:$\forall$ *t2*<*t*. *a t2* = []
and *h2*:*Loss lose a i2 y i*
and *h3*:*ts lose*
shows $\forall$ *t2*<*t*. *y t2* = []
using *assms*
apply *clarify*
by (*rule Loss-L3*, *auto*)

lemma *Loss-L5*:
assumes *h1*:$\forall\, t1 \leq t.\ a\ t1 = []$
and *h2*:*Loss lose a i2 y i*
and *h3*:$t2 \leq t$
and *h4*:*ts lose*
shows $y\ t2 = []$
proof (*cases lose t2* = [*False*])
assume *a1*:*lose t2* = [*False*]
from *assms* **and** *a1* **show** *?thesis* **by** (*simp add*: *Loss-def*)
next
assume *a2*:*lose t2* $\neq$ [*False*]
from *a2* **and** *h4* **have** *sg1*:*lose t2* = [*True*] **by** (*simp add*: *ts-bool-True*)
from *assms* **and** *sg1* **show** *?thesis* **by** (*simp add*: *Loss-def*)
qed

lemma *Loss-L5Suc*:
assumes *h1*:$\forall\, j \leq d.\ a\ (t + Suc\ j) = []$
and *h2*:*Loss lose a i2 y i*
and *h3*:*Suc j* $\leq d$
and *h4*:*ts lose*
shows $y\ (t + Suc\ j) = []$
proof (*cases lose* $(t + Suc\ j)$ = [*False*])
assume *a1*:*lose* $(t + Suc\ j)$ = [*False*]
from *assms* **and** *a1* **show** *?thesis* **by** (*simp add*: *Loss-def*)
next
assume *a2*:*lose* $(t + Suc\ j) \neq$ [*False*]
from *a2* **and** *h4* **have** *sg1*:*lose* $(t + Suc\ j)$ = [*True*] **by** (*simp add*: *ts-bool-True*)
from *assms* **and** *sg1* **show** *?thesis* **by** (*simp add*: *Loss-def*)
qed

lemma *Loss-L6*:
assumes *h1*:$\forall\, t2 \leq t.\ a\ t2 = []$
and *h2*:*Loss lose a i2 y i*
and *h3*:*ts lose*
shows $\forall\, t2 \leq t.\ y\ t2 = []$
using *assms*
apply *clarify*
by (*rule Loss-L5*, *auto*)

lemma *Loss-lengthOut1*:
assumes *h1*:$\forall\, t.$ *length* $(a\ t) \leq$ *Suc 0*
and *h2*:*Loss lose a i2 x i*
shows *length* $(x\ t) \leq$ *Suc 0*
proof (*cases lose t* = [*False*])
assume *a1*:*lose t* = [*False*]
from *a1* **and** *h2* **have** *sg1*:$x\ t = a\ t$ **by** (*simp add*: *Loss-def*)
from *h1* **have** *sg2*:*length* $(a\ t) \leq$ *Suc 0* **by** *auto*
from *sg1* **and** *sg2* **show** *?thesis* **by** *simp*
next

assume *a2*:*lose t* ≠ [*False*]
from *a2* **and** *h2* **have** *sg2*:*x t* = [] **by** (*simp add*: *Loss-def*)
from *sg2* **show** *?thesis* **by** *simp*
qed

lemma *Loss-lengthOut2*:
assumes *h1*:∀ *t*. *length* (*a t*) ≤ *Suc 0*
and *h2*:*Loss lose a i2 x i*
shows ∀ *t*. *length* (*x t*) ≤ *Suc 0*
using *assms*
by (*simp add*: *Loss-lengthOut1*)

lemma *Loss-msg1*:
assumes *h1*:*msg* (*Suc 0*) *a*
and *h2*:*Loss lose a i2 x i*
shows *msg* (*Suc 0*) *x*
using *assms*
by (*simp add*: *msg-def Loss-def Loss-lengthOut1*)

15.4 Properties of the composition of Delay and Loss components

lemma *Loss-Delay-length-y*:
assumes *h1*:∀ *t*. *length* (*a t*) ≤ *Suc 0*
and *h2*:*Delay x i1 d y i2*
and *h3*:*Loss lose a i2 x i*
shows *length* (*y t*) ≤ *Suc 0*
proof −
from *h1* **and** *h3* **have** *sg1*:∀ *t*. *length* (*x t*) ≤ *Suc 0*
by (*simp add*: *Loss-lengthOut2*)
from *this* **and** *h2* **show** *?thesis*
by (*simp add*: *Delay-lengthOut1*)
qed

lemma *Loss-Delay-msg-a*:
assumes *h1*:*msg* (*Suc 0*) *a*
and *h2*:*Delay x i1 d y i2*
and *h3*:*Loss lose a i2 x i*
shows *msg* (*Suc 0*) *y*
using *assms*
by (*simp add*: *msg-def Loss-Delay-length-y*)

15.5 Auxiliary Lemmas

lemma *inf-last-ti2*:
assumes *h1*:*inf-last-ti dt* (*Suc* (*Suc t*)) ≠ []
shows *inf-last-ti dt* (*Suc* (*Suc* (*t* + *k*))) ≠ []
using *assms*
proof (*induct k*)

```
  case 0
  from this show ?case by auto
next
  case Suc
  from this show ?case by auto
qed


lemma aux-ack-t2:
  assumes h1:∀ m≤k. ack (Suc (Suc (t + m))) = [connection-ok]
     and h2:Suc (Suc t) < t2
     and h3:t2 < t + 3 + k
  shows      ack t2 = [connection-ok]
proof −
  from h3 have sg1:t2 − Suc (Suc t) ≤ k by arith
  from h1 and sg1
    obtain m where a1:m = t2 − Suc (Suc t)
             and a2:ack (Suc (Suc (t + m))) = [connection-ok]
    by auto
  from h2 have sg2:(Suc (Suc (t2 − 2))) =  t2 by arith
  from h2 have sg3:Suc (Suc (t + (t2 − Suc (Suc t)))) =  t2 by arith
  from sg1 and a1 and a2 and sg2 and sg3 show ?thesis by simp
qed


lemma aux-lemma-lose-1:
  assumes h1:∀ j≤((2::nat) * d + ((4::nat) + k)). (lose (t + j) = x)
     and h2:ka≤Suc d
  shows      lose (Suc (Suc (t + k + ka))) = x
proof −
  from h2 have sg1:k + (2::nat) + ka ≤ (2::nat) * d + ((4::nat) + k) by arith
  from h2 and sg1 have sg2:Suc (Suc (k + ka)) ≤2 * d + (4 + k) by arith
  from sg1 and sg2 and h1 and h2  obtain j where a1:j = k + (2::nat) + ka
                                  and a2:lose (t + j) = x
    by arith
  have sg3:Suc (Suc (t + (k + ka))) = Suc (Suc (t + k + ka)) by arith
  from a1 and a2 and sg3 show ?thesis  by simp
qed


lemma aux-lemma-lose-2:
  assumes h1:∀ j≤(2::nat) * d + ((4::nat) + k). lose (t + j) = [False]
  shows   ∀ x≤d + (1::nat). lose (t + x) = [False]
using assms by auto


lemma aux-lemma-lose-3a:
  assumes h1:∀ j≤2 * d + (4 + k). lose (t + j) = [False]
     and h2:ka ≤ Suc d
```

shows *lose* $(d + (t + (3 + k)) + ka) = [False]$
proof −
from *h2* **have** *sg1*:$(d + 3 + k + ka) \leq 2 * d + (4 + k)$
by *arith*
from *h1* **and** *h2* **and** *sg1* **obtain** *j* **where** *a1*:$j = (d + 3 + k + ka)$ **and**
a2:*lose* $(t + j) = [False]$
by *simp*
from *h2* **and** *sg1* **have** *sg2*:$(t + (d + 3 + k + ka)) = (d + (t + (3 + k)) + ka)$
by *arith*
from *h1* **and** *h2* **and** *a1* **and** *a2* **and** *sg2* **show** *?thesis*
by *simp*
qed

lemma *aux-lemma-lose-3*:
assumes *h1*:$\forall j \leq 2 * d + (4 + k).$ *lose* $(t + j) = [False]$
shows $\forall ka \leq Suc\ d.$ *lose* $(d + (t + (3 + k)) + ka) = [False]$
using *assms*
by (*auto*, *simp add*: *aux-lemma-lose-3a*)

lemma *aux-arith1-Gateway7*:
assumes *h1*:$t2 - t \leq (2::nat) * d + (t + ((4::nat) + k))$
and *h2*:$t2 < t + (3::nat) + k + d$
and *h3*:$\neg\ t2 - d < (0::nat)$
shows $t2 - d < t + (3::nat) + k$
using *assms* **by** *arith*

lemma *ts-lose-ack-st1ts*:
assumes *h1*:*ts lose*
and *h2*:*lose* $t = [True] \longrightarrow ack\ t = [x] \wedge st\text{-}out\ t = x$
and *h3*:*lose* $t = [False] \longrightarrow ack\ t = [y] \wedge st\text{-}out\ t = y$
shows *ack* $t = [st\text{-}out\ t]$
proof (*cases lose* $t = [False]$)
assume *a1*:*lose* $t = [False]$
from *this* **and** *h3* **show** *?thesis* **by** *simp*
next
assume *a2*:*lose* $t \neq [False]$
from *this* **and** *h1* **have** *ag1*:*lose* $t = [True]$ **by** (*simp add*: *ts-bool-True*)
from *this* **and** *a2* **and** *h2* **show** *?thesis* **by** *simp*
qed

lemma *ts-lose-ack-st1*:
assumes *h1*:*lose* $t = [True] \vee$ *lose* $t = [False]$
and *h2*:*lose* $t = [True] \longrightarrow ack\ t = [x] \wedge st\text{-}out\ t = x$
and *h3*:*lose* $t = [False] \longrightarrow ack\ t = [y] \wedge st\text{-}out\ t = y$

shows *ack t* = [*st-out t*]
proof (*cases lose t* = [*False*])
assume *a1*:*lose t* = [*False*]
from *this* **and** *h3* **show** *?thesis* **by** *simp*
next
assume *a2*:*lose t* ≠ [*False*]
from *this* **and** *h1* **have** *ag1*:*lose t* = [*True*] **by** (*simp add*: *ts-bool-True*)
from *this* **and** *a2* **and** *h2* **show** *?thesis* **by** *simp*
qed

lemma *ts-lose-ack-st2ts*:
assumes *h1*:*ts lose*
and *h2*:*lose t* = [*True*] ⟶
ack t = [*x*] ∧ *i1 t* = [] ∧ *vc t* = [] ∧ *st-out t* = *x*
and *h3*:*lose t* = [*False*] ⟶
ack t = [*y*] ∧ *i1 t* = [] ∧ *vc t* = [] ∧ *st-out t* = *y*
shows *ack t* = [*st-out t*]
proof (*cases lose t* = [*False*])
assume *a1*:*lose t* = [*False*]
from *this* **and** *h3* **show** *?thesis* **by** *simp*
next
assume *a2*:*lose t* ≠ [*False*]
from *this* **and** *h1* **have** *ag1*:*lose t* = [*True*] **by** (*simp add*: *ts-bool-True*)
from *this* **and** *a2* **and** *h2* **show** *?thesis* **by** *simp*
qed

lemma *ts-lose-ack-st2*:
assumes *h1*:*lose t* = [*True*] ∨ *lose t* = [*False*]
and *h2*:*lose t* = [*True*] ⟶
ack t = [*x*] ∧ *i1 t* = [] ∧ *vc t* = [] ∧ *st-out t* = *x*
and *h3*:*lose t* = [*False*] ⟶
ack t = [*y*] ∧ *i1 t* = [] ∧ *vc t* = [] ∧ *st-out t* = *y*
shows *ack t* = [*st-out t*]
proof (*cases lose t* = [*False*])
assume *a1*:*lose t* = [*False*]
from *this* **and** *h3* **show** *?thesis* **by** *simp*
next
assume *a2*:*lose t* ≠ [*False*]
from *this* **and** *h1* **have** *ag1*:*lose t* = [*True*] **by** (*simp add*: *ts-bool-True*)
from *this* **and** *a2* **and** *h2* **show** *?thesis* **by** *simp*
qed

lemma *ts-lose-ack-st2vc-com*:
assumes *h1*:*lose t* = [*True*] ∨ *lose t* = [*False*]
and *h2*:*lose t* = [*True*] ⟶
ack t = [*x*] ∧ *i1 t* = [] ∧ *vc t* = [] ∧ *st-out t* = *x*
and *h3*:*lose t* = [*False*] ⟶

ack t = [*y*] ∧ *i1 t* = [] ∧ *vc t* = [*vc-com*] ∧ *st-out t* = *y*
shows *ack t* = [*st-out t*]
proof (*cases lose t* = [*False*])
assume *a1*:*lose t* = [*False*]
from *this* **and** *h3* **show** *?thesis* **by** *simp*
next
assume *a2*:*lose t* ≠ [*False*]
from *this* **and** *h1* **have** *ag1*:*lose t* = [*True*] **by** (*simp add*: *ts-bool-True*)
from *this* **and** *a2* **and** *h2* **show** *?thesis* **by** *simp*
qed

lemma *ts-lose-ack-st2send*:
assumes *h1*:*lose t* = [*True*] ∨ *lose t* = [*False*]
and *h2*:*lose t* = [*True*] ⟶
ack t = [*x*] ∧ *i1 t* = [] ∧ *vc t* = [] ∧ *st-out t* = *x*
and *h3*:*lose t* = [*False*] ⟶
ack t = [*y*] ∧ *i1 t* = *b t* ∧ *vc t* = [] ∧ *st-out t* = *y*
shows *ack t* = [*st-out t*]
proof (*cases lose t* = [*False*])
assume *a1*:*lose t* = [*False*]
from *this* **and** *h3* **show** *?thesis* **by** *simp*
next
assume *a2*:*lose t* ≠ [*False*]
from *this* **and** *h1* **have** *ag1*:*lose t* = [*True*] **by** (*simp add*: *ts-bool-True*)
from *this* **and** *a2* **and** *h2* **show** *?thesis* **by** *simp*
qed

lemma *tiTable-ack-st-splitten*:
assumes *h1*:*ts lose*
and *h2*:*msg* (*Suc 0*) *a1*
and *h3*:*msg* (*Suc 0*) *stop*
and *h4*:*st-in t* = *init-state* ∧ *req t* = [*init*] ⟶
ack t = [*call*] ∧ *i1 t* = [] ∧ *vc t* = [] ∧ *st-out t* = *call*
and *h5*:*st-in t* = *init-state* ∧ *req t* ≠ [*init*] ⟶
ack t = [*init-state*] ∧ *i1 t* = [] ∧ *vc t* = [] ∧ *st-out t* = *init-state*
and *h6*:(*st-in t* = *call* ∨ *st-in t* = *connection-ok* ∧ *req t* ≠ [*send*]) ∧ *lose t* = [*False*] ⟶
ack t = [*connection-ok*] ∧ *i1 t* = [] ∧ *vc t* = [] ∧ *st-out t* = *connection-ok*
and *h7*:(*st-in t* = *call* ∨ *st-in t* = *connection-ok* ∨ *st-in t* = *sending-data*) ∧ *lose t* = [*True*] ⟶
ack t = [*init-state*] ∧ *i1 t* = [] ∧ *vc t* = [] ∧ *st-out t* = *init-state*
and *h8*:*st-in t* = *connection-ok* ∧ *req t* = [*send*] ∧ *lose t* = [*False*] ⟶
ack t = [*sending-data*] ∧ *i1 t* = *b t* ∧ *vc t* = [] ∧ *st-out t* = *sending-data*
and *h9*:*st-in t* = *sending-data* ∧ *a1 t* = [] ∧ *lose t* = [*False*] ⟶
ack t = [*sending-data*] ∧ *i1 t* = [] ∧ *vc t* = [] ∧ *st-out t* = *sending-data*
and *h10*:*st-in t* = *sending-data* ∧ *a1 t* = [*sc-ack*] ∧ *lose t* = [*False*] ⟶
ack t = [*voice-com*] ∧ *i1 t* = [] ∧ *vc t* = [*vc-com*] ∧ *st-out t* = *voice-com*

```
    and h11:st-in t = voice-com ∧ stop t = [] ∧ lose t = [False] ⟶
        ack t = [voice-com] ∧ i1 t = [] ∧ vc t = [vc-com] ∧ st-out t = voice-com
    and h12:st-in t = voice-com ∧ stop t = [] ∧ lose t = [True] ⟶
        ack t = [voice-com] ∧ i1 t = [] ∧ vc t = [] ∧ st-out t = voice-com
    and h13:st-in t = voice-com ∧ stop t = [stop-vc] ⟶
        ack t = [init-state] ∧ i1 t = [] ∧ vc t = [] ∧ st-out t = init-state
  shows ack t = [st-out t]
proof −
  from h1 and h6 and h7 have sg1:lose t = [True] ∨ lose t = [False]
    by (simp add: ts-bool-True-False)
show ?thesis
proof (cases st-in t)
  assume a1:st-in t = init-state
  from a1 and h4 and h5 show ?thesis
  proof (cases req t = [init])
    assume a11:req t = [init]
    from a11 and a1 and h4 and h5 show ?thesis by simp
  next
    assume a12:req t ≠ [init]
    from a12 and a1 and h4 and h5 show ?thesis by simp
  qed
next
  assume a2:st-in t = call
  from a2 and sg1 and h6 and h7 show ?thesis
     apply simp
     by (rule ts-lose-ack-st2, assumption+)
next
  assume a3:st-in t = connection-ok
  from a3 and h6 and h7 and h8 show ?thesis apply simp
  proof (cases req t = [send])
    assume a31:req t = [send]
    from this and a3 and h6 and h7 and h8 and sg1 show ?thesis
      apply simp
      by (rule ts-lose-ack-st2send, assumption+)
  next
    assume a32:req t ≠ [send]
    from this and a3 and h6 and h7 and h8 and sg1 show ?thesis
      apply simp
      by (rule ts-lose-ack-st2, assumption+)
  qed
next
  assume a4:st-in t = sending-data
  from sg1 and a4 and h7 and h9 and h10  show ?thesis apply simp
  proof (cases a1 t = [])
    assume a41:a1 t = []
    from this and a4 and sg1 and h7 and h9 and h10 show ?thesis
      apply simp
      by (rule ts-lose-ack-st2, assumption+)
  next
```

```
    assume a42:a1 t ≠ []
    from this and h2 have a1 t = [sc-ack] by (simp add: aType-nonempty)
    from this and a4 and a42 and sg1 and h7 and h9 and h10 show ?thesis
      apply simp
      by (rule ts-lose-ack-st2vc-com, assumption+)
  qed
next
  assume a5:st-in t = voice-com
  from a5 and h11 and h12 and h13 show ?thesis apply simp
  proof (cases stop t = [])
    assume a51:stop t = []
    from this and a5 and h11 and h12 and h13 and sg1 show ?thesis
      apply simp
      by (rule ts-lose-ack-st2vc-com, assumption+)
  next
    assume a52:stop t ≠ []
    from this and h3 have sg7:stop t = [stop-vc]
      by (simp add: stopType-nonempty)
    from this and a5 and a52 and h13 show ?thesis by simp
  qed
qed
qed

lemma tiTable-ack-st:
  assumes h1:tiTable-SampleT req a1 stop lose st-in b ack i1 vc st-out
      and h2:ts lose
      and h3:msg (Suc 0) a1
      and h4:msg (Suc 0) stop
  shows      ack t = [st-out t]
proof −
  from assms have sg1:
   st-in t = init-state ∧ req t = [init] ⟶
    ack t = [call] ∧ i1 t = [] ∧ vc t = [] ∧ st-out t = call
     by (simp add: tiTable-SampleT-def)
  from assms have sg2:
   st-in t = init-state ∧ req t ≠ [init] ⟶
    ack t = [init-state] ∧ i1 t = [] ∧ vc t = [] ∧ st-out t = init-state
     by (simp add: tiTable-SampleT-def)
  from assms have sg3:
   (st-in t = call ∨ st-in t = connection-ok ∧ req t ≠ [send]) ∧
     lose t = [False] ⟶
     ack t = [connection-ok] ∧ i1 t = [] ∧ vc t = [] ∧ st-out t = connection-ok
     by (simp add: tiTable-SampleT-def)
  from assms have sg4:
   (st-in t = call ∨ st-in t = connection-ok ∨ st-in t = sending-data) ∧
     lose t = [True] ⟶
     ack t = [init-state] ∧ i1 t = [] ∧ vc t = [] ∧ st-out t = init-state
     by (simp add: tiTable-SampleT-def)
  from assms have sg5:
```

```
   st-in t = connection-ok ∧ req t = [send] ∧ lose t = [False] ⟶
    ack t = [sending-data] ∧ i1 t = b t ∧ vc t = [] ∧ st-out t = sending-data
    by (simp add: tiTable-SampleT-def)
  from assms have sg6:
   st-in t = sending-data ∧ a1 t = [] ∧ lose t = [False] ⟶
    ack t = [sending-data] ∧ i1 t = [] ∧ vc t = [] ∧ st-out t = sending-data
     by (simp add: tiTable-SampleT-def)
  from assms have sg7:
   st-in t = sending-data ∧ a1 t = [sc-ack] ∧ lose t = [False] ⟶
    ack t = [voice-com] ∧ i1 t = [] ∧ vc t = [vc-com] ∧ st-out t = voice-com
    by (simp add: tiTable-SampleT-def)
  from assms have sg8:
   st-in t = voice-com ∧ stop t = [] ∧ lose t = [False] ⟶
    ack t = [voice-com] ∧ i1 t = [] ∧ vc t = [vc-com] ∧ st-out t = voice-com
    by (simp add: tiTable-SampleT-def)
  from assms have sg9:
   st-in t = voice-com ∧ stop t = [] ∧ lose t = [True] ⟶
    ack t = [voice-com] ∧ i1 t = [] ∧ vc t = [] ∧ st-out t = voice-com
    by (simp add: tiTable-SampleT-def)
  from assms have sg10:
   st-in t = voice-com ∧ stop t = [stop-vc] ⟶
    ack t = [init-state] ∧ i1 t = [] ∧ vc t = [] ∧ st-out t = init-state
    by (simp add: tiTable-SampleT-def)
  from h2 and h3 and h4 and sg1 and sg2 and sg3 and sg4 and sg5 and
  sg6 and sg7 and sg8 and sg9 and sg10 show ?thesis
    by (rule tiTable-ack-st-splitten)
qed

lemma tiTable-ack-st-hd:
  assumes h1:tiTable-SampleT req a1 stop lose st-in b ack i1 vc st-out
      and h2:ts lose
      and h3:msg (Suc 0) a1
      and h4:msg (Suc 0) stop
  shows st-out t =  hd (ack t)
using assms by (simp add:  tiTable-ack-st)

lemma tiTable-ack-connection-ok:
  assumes h1:tiTable-SampleT req x stop lose st-in b ack i1 vc st-out
      and h2:ack t = [connection-ok]
      and h3:msg (Suc 0) x
      and h4:ts lose
      and h5:msg (Suc 0) stop
  shows (st-in t = call ∨ st-in t = connection-ok ∧ req t ≠ [send]) ∧
        lose t = [False]
proof −
  from h1 and h4 have sg1:lose t = [True] ∨ lose t = [False]
    by (simp add: ts-bool-True-False)
  from h1 and h3 have sg2:x t = [] ∨ x t = [sc-ack]
    by (simp add: aType-lemma)
```

from *h1* **and** *h5* **have** *sg3*:*stop t* = [] ∨ *stop t* = [*stop-vc*]
by (*simp add*: *stopType-lemma*) **show** *?thesis*
proof (*cases st-in t*)
assume *a1*:*st-in t* = *init-state*
show *?thesis*
proof (*cases req t* = [*init*])
assume *a11*:*req t* = [*init*]
from *h1* **and** *a1* **and** *a11* **and** *h2* **show** *?thesis* **by** (*simp add*: *tiTable-SampleT-def*)
next
assume *a12*:*req t* ≠ [*init*]
from *h1* **and** *a1* **and** *a12* **and** *h2* **show** *?thesis* **by** (*simp add*: *tiTable-SampleT-def*)
qed
next
assume *a2*:*st-in t* = *call*
show *?thesis*
proof (*cases lose t* = [*True*])
assume *a21*:*lose t* = [*True*]
from *h1* **and** *a2* **and** *a21* **and** *h2* **show** *?thesis* **by** (*simp add*: *tiTable-SampleT-def*)
next
assume *a22*:*lose t* ≠ [*True*]
from *this* **and** *h4* **have** *a22a*:*lose t* = [*False*] **by** (*simp add*: *ts-bool-False*)
from *h1* **have**
(*st-in t* = *call* ∨ *st-in t* = *connection-ok* ∧ *req t* ≠ [*send*]) ∧
lose t = [*False*] ⟶
ack t = [*connection-ok*] ∧ *i1 t* = [] ∧ *vc t* = [] ∧ *st-out t* = *connection-ok*
by (*simp add*: *tiTable-SampleT-def*)
from *this* **and** *a2* **and** *a22a* **and** *h2* **show** *?thesis* **by** *simp*
qed
next
assume *a3*:*st-in t* = *connection-ok*
show *?thesis*
proof (*cases lose t* = [*True*])
assume *a31*:*lose t* = [*True*]
from *h1* **have**
(*st-in t* = *call* ∨ *st-in t* = *connection-ok* ∨ *st-in t* = *sending-data*) ∧
lose t = [*True*] ⟶
ack t = [*init-state*] ∧ *i1 t* = [] ∧ *vc t* = [] ∧ *st-out t* = *init-state*
by (*simp add*: *tiTable-SampleT-def*)
from *this* **and** *a3* **and** *a31* **and** *h2* **show** *?thesis* **by** *simp*
next
assume *a32*:*lose t* ≠ [*True*]
from *this* **and** *h4* **have** *a32a*:*lose t* = [*False*] **by** (*simp add*: *ts-bool-False*)
show *?thesis*
proof (*cases req t* = [*send*])
assume *a321*:*req t* = [*send*]
from *h1* **and** *a3* **and** *a32a* **and** *a321* **and** *h2* **show** *?thesis*
by (*simp add*: *tiTable-SampleT-def*)
next
assume *a322*:*req t* ≠ [*send*]

```
      from h1 and a3 and a32a and a322 and h2 show ?thesis
        by (simp add: tiTable-SampleT-def)
    qed
  qed
 next
  assume a4:st-in t = sending-data
  show ?thesis
  proof (cases lose t = [True])
   assume a41:lose t = [True]
  from h1 and a4 and a41 and h2 show ?thesis by (simp add: tiTable-SampleT-def)
  next
   assume a42:lose t ≠ [True]
   from this and h4 have a42a:lose t = [False] by (simp add: ts-bool-False)
   show ?thesis
   proof (cases x t = [sc-ack])
    assume a421:x t = [sc-ack]
    from h1 and a4 and a42a and a421 and h2 show ?thesis
      by (simp add: tiTable-SampleT-def)
   next
    assume a422: x t ≠ [sc-ack]
    from this and h3  have a422a:x t = [] by (simp add: aType-empty)
    from h1 and a4 and a42a and a422a and h2 show ?thesis
      by (simp add: tiTable-SampleT-def)
   qed
  qed
 next
  assume a5:st-in t = voice-com
  show ?thesis
  proof (cases stop t = [stop-vc])
   assume a51:stop t = [stop-vc]
   from h1 and a5 and a51 and h2 show ?thesis
     by (simp add: tiTable-SampleT-def)
  next
   assume a52:stop t ≠ [stop-vc]
   from this and h5 have a52a:stop t = [] by (simp add: stopType-empty)
   show ?thesis
   proof (cases lose t = [True])
    assume a521:lose t = [True]
    from h1 and a5 and a52a and a521 and h2 show ?thesis
      by (simp add: tiTable-SampleT-def)
   next
    assume a522:lose t ≠ [True]
   from this and h4 have a522a:lose t = [False] by (simp add: ts-bool-False)
    from h1 and a5 and a52a and a522a and h2 show ?thesis
      by (simp add: tiTable-SampleT-def)
   qed
  qed
 qed
qed
```

```
lemma tiTable-i1-1:
  assumes h1:tiTable-SampleT req x stop lose st-in b ack i1 vc st-out
      and h2:ts lose
      and h3:msg (Suc 0) x
      and h4:msg (Suc 0) stop
      and h5:ack t = [connection-ok]
  shows i1 t = []
proof −
  from assms have sg1:
   (st-in t = call ∨ st-in t = connection-ok ∧ req t ≠ [send]) ∧
    lose t = [False]
    by (simp add: tiTable-ack-connection-ok)
  from this and h1 show ?thesis by (simp add: tiTable-SampleT-def)
qed

lemma tiTable-ack-call:
  assumes h1:tiTable-SampleT req x stop lose st-in b ack i1 vc st-out
      and h2:ack t = [call]
      and h3:msg (Suc 0) x
      and h4:ts lose
      and h5:msg (Suc 0) stop
  shows st-in t = init-state ∧ req t = [init]
proof −
  from h1 and h4 have sg1:lose t = [True] ∨ lose t = [False]
    by (simp add: ts-bool-True-False)
  from h1 and h3 have sg2:x t = [] ∨ x t = [sc-ack]
    by (simp add: aType-lemma)
  from h1 and h5 have sg3:stop t = [] ∨ stop t = [stop-vc]
    by (simp add: stopType-lemma)
  show ?thesis
  proof (cases st-in t)
    assume a1:st-in t = init-state
    show ?thesis
    proof (cases req t = [init])
      assume a11:req t = [init]
      from h1 and a1 and a11 and h2 show ?thesis
        by (simp add: tiTable-SampleT-def)
    next
      assume a12:req t ≠ [init]
      from h1 and a1 and a12 and h2 show ?thesis
        by (simp add: tiTable-SampleT-def)
    qed
  next
    assume a2:st-in t = call
    show ?thesis
    proof (cases lose t = [True])
      assume a21:lose t = [True]
      from h1 and a2 and a21 and h2 show ?thesis
```

```
    by (simp add: tiTable-SampleT-def)
  next
    assume a22:lose t ≠ [True]
    from this and h4 have a22a:lose t = [False] by (simp add: ts-bool-False)
    from h1 and a2 and a22a and h2 show ?thesis
      by (simp add: tiTable-SampleT-def)
  qed
next
  assume a3:st-in t = connection-ok
  show ?thesis
  proof (cases lose t = [True])
    assume a31:lose t = [True]
  from h1 and a3 and a31 and h2 show ?thesis by (simp add: tiTable-SampleT-def)
  next
    assume a32:lose t ≠ [True]
    from this and h4 have a32a:lose t = [False] by (simp add: ts-bool-False)
    show ?thesis
    proof (cases req t = [send])
      assume a321:req t = [send]
      from h1 and a3 and a32a and a321 and h2 show ?thesis
        by (simp add: tiTable-SampleT-def)
    next
      assume a322:req t ≠ [send]
      from h1 and a3 and a32a and a322 and h2 show ?thesis
        by (simp add: tiTable-SampleT-def)
    qed
  qed
next
  assume a4:st-in t = sending-data
  show ?thesis
  proof (cases lose t = [True])
    assume a41:lose t = [True]
    from h1 and a4 and a41 and h2 show ?thesis
      by (simp add: tiTable-SampleT-def)
  next
    assume a42:lose t ≠ [True]
    from this and h4 have a42a:lose t = [False] by (simp add: ts-bool-False)
    show ?thesis
    proof (cases x t = [sc-ack])
      assume a421:x t = [sc-ack]
      from h1 and a4 and a42a and a421 and h2 show ?thesis
        by (simp add: tiTable-SampleT-def)
    next
      assume a422: x t ≠ [sc-ack]
      from this and h3  have a422a:x t = [] by (simp add: aType-empty)
      from h1 and a4 and a42a and a422a and h2 show ?thesis
        by (simp add: tiTable-SampleT-def)
    qed
  qed
```

```
  next
    assume a5:st-in t = voice-com
    show ?thesis
    proof (cases stop t = [stop-vc])
      assume a51:stop t = [stop-vc]
      from h1 and a5 and a51 and h2 show ?thesis
        by (simp add: tiTable-SampleT-def)
    next
      assume a52:stop t ≠ [stop-vc]
      from this and h5 have a52a:stop t = [] by (simp add: stopType-empty)
      show ?thesis
      proof (cases lose t = [True])
        assume a521:lose t = [True]
        from h1 and a5 and a52a and a521 and h2 show ?thesis
          by (simp add: tiTable-SampleT-def)
      next
        assume a522:lose t ≠ [True]
       from this and h4 have a522a:lose t = [False] by (simp add: ts-bool-False)
        from h1 and a5 and a52a and a522a and h2 show ?thesis
          by (simp add: tiTable-SampleT-def)
      qed
    qed
  qed
qed

lemma tiTable-i1-2:
  assumes h1:tiTable-SampleT req a1 stop lose st-in b ack i1 vc st-out
      and h2:ts lose
      and h3:msg (Suc 0) a1  and h4:msg (Suc 0) stop
      and h5:ack t = [call]
  shows i1 t = []
proof −
  from assms have sg1:st-in t = init-state ∧ req t = [init]
    by (simp add: tiTable-ack-call)
  from this and h1 show ?thesis
    by (simp add: tiTable-SampleT-def)
qed

lemma tiTable-ack-init0:
  assumes h1:tiTable-SampleT req a1 stop lose
                (fin-inf-append [init-state] st)
                 b ack i1 vc st
      and h2:req 0 = []
  shows ack 0 = [init-state]
proof −
  have sg1:(fin-inf-append [init-state] st) (0::nat) = init-state
    by (simp add: fin-inf-append-def)
  from h1 and sg1 and h2 show ?thesis by (simp add: tiTable-SampleT-def)
qed
```

lemma *tiTable-ack-init*:
assumes *h1*:*tiTable-SampleT req a1 stop lose*
(*fin-inf-append* [*init-state*] *st*)
b ack i1 vc st
and *h2*:*ts lose*
and *h3*:*msg* (*Suc 0*) *a1*
and *h4*:*msg* (*Suc 0*) *stop*
and *h5*:∀ *t1* ≤ *t*. *req t1* = []
shows *ack t* = [*init-state*]
using *assms*
proof (*induction t*)
case *0*
from *this* **show** *?case*
by (*simp add*: *tiTable-ack-init0*)
next
case (*Suc t*)
from *Suc* **have** *sg1*: *st t* = *hd* (*ack t*)
by (*simp add*: *tiTable-ack-st-hd*)
from *Suc* **and** *sg1* **have** *sg2*:
(*fin-inf-append* [*init-state*] *st*) (*Suc t*) = *init-state*
by (*simp add*: *correct-fin-inf-append2*)
from *Suc* **and** *sg1* **and** *sg2* **show** *?case*
by (*simp add*: *tiTable-SampleT-def*)
qed

lemma *tiTable-i1-3*:
assumes *h1*:*tiTable-SampleT req x stop lose*
(*fin-inf-append* [*init-state*] *st*)
b ack i1 vc st
and *h2*:*ts lose*
and *h3*:*msg* (*Suc 0*) *x*
and *h4*:*msg* (*Suc 0*) *stop*
and *h5*:∀ *t1* ≤ *t*. *req t1* = []
shows *i1 t* = []
proof −
from *assms* **have** *sg1*:*ack t* = [*init-state*]
by (*simp add*: *tiTable-ack-init*)
from *assms* **have** *sg2*:*st t* = *hd* (*ack t*)
by (*simp add*: *tiTable-ack-st-hd*)
from *sg1* **and** *sg2* **have** *sg3*:
(*fin-inf-append* [*init-state*] *st*) (*Suc t*) = *init-state*
by (*simp add*: *correct-fin-inf-append2*)
from *h1* **and** *h2* **have** *sg4*:*lose t* = [*True*] ∨ *lose t* = [*False*]
by (*simp add*: *ts-bool-True-False*)
from *h1* **and** *h3* **have** *sg5*:*x t* = [] ∨ *x t* = [*sc-ack*]
by (*simp add*: *aType-lemma*)

```
from h1 and h4 have sg6:stop t = [] ∨ stop t = [stop-vc]
  by (simp add: stopType-lemma)
show ?thesis
proof (cases fin-inf-append [init-state] st t)
  assume a1:fin-inf-append [init-state] st t = init-state
  from assms and sg1 and sg2 and sg3 and a1 show ?thesis
    by (simp add:  tiTable-SampleT-def)
next
  assume a2:fin-inf-append [init-state] st t = call
  show ?thesis
  proof (cases lose t = [True])
    assume a21:lose t = [True]
   from h1 and a2 and a21 show ?thesis by (simp add: tiTable-SampleT-def)
  next
    assume a22:lose t ≠ [True]
    from this and h2 have a22a:lose t = [False] by (simp add: ts-bool-False)
   from h1 and a2 and a22a show ?thesis by (simp add: tiTable-SampleT-def)
  qed
next
  assume a3:fin-inf-append [init-state] st t = connection-ok
  show ?thesis
  proof (cases lose t = [True])
    assume a31:lose t = [True]
   from h1 and a3 and a31 show ?thesis by (simp add: tiTable-SampleT-def)
  next
    assume a32:lose t ≠ [True]
    from this and h2 have a32a:lose t = [False] by (simp add: ts-bool-False)
    from h5 have a322:req t ≠ [send] by auto
    from h1 and a3 and a32a and a322 show ?thesis
      by (simp add: tiTable-SampleT-def)
  qed
next
  assume a4:fin-inf-append [init-state] st t = sending-data
  show ?thesis
  proof (cases lose t = [True])
    assume a41:lose t = [True]
   from h1 and a4 and a41 show ?thesis by (simp add: tiTable-SampleT-def)

  next
    assume a42:lose t ≠ [True]
    from this and h2 have a42a:lose t = [False] by (simp add: ts-bool-False)
    show ?thesis
    proof (cases x t = [sc-ack])
      assume a421:x t = [sc-ack]
      from h1 and a4 and a42a and a421 and h2 show ?thesis
        by (simp add: tiTable-SampleT-def)
    next
      assume a422: x t ≠ [sc-ack]
      from this and h3  have a422a:x t = [] by (simp add: aType-empty)
```

```
      from h1 and a4 and a42a and a422a and h2 show ?thesis
        by (simp add: tiTable-SampleT-def)
    qed
  qed
 next
  assume a5:fin-inf-append [init-state] st t = voice-com
  show ?thesis
  proof (cases stop t = [stop-vc])
   assume a51:stop t = [stop-vc]
  from h1 and a5 and a51 and h2 show ?thesis by (simp add: tiTable-SampleT-def)
  next
   assume a52:stop t ≠ [stop-vc]
   from this and h4 have a52a:stop t = [] by (simp add: stopType-empty)
   show ?thesis
   proof (cases lose t = [True])
    assume a521:lose t = [True]
    from h1 and a5 and a52a and a521 and h2 show ?thesis
     by (simp add: tiTable-SampleT-def)
   next
    assume a522:lose t ≠ [True]
   from this and h2 have a522a:lose t = [False] by (simp add: ts-bool-False)
    from h1 and a5 and a52a and a522a and h2 show ?thesis
     by (simp add: tiTable-SampleT-def)
   qed
  qed
 qed
qed


lemma tiTable-st-call-ok:
 assumes h1:tiTable-SampleT req x stop lose
                (fin-inf-append [init-state] st)
                 b ack i1 vc st
    and h2:ts lose
    and h3:∀ m ≤ k. ack (Suc (Suc (t + m))) = [connection-ok]
    and h4:st (Suc t) = call
 shows st (Suc (Suc t)) = connection-ok
proof −
   from h4 have sg1:
    (fin-inf-append [init-state] st) (Suc (Suc t)) = call
     by (simp add: correct-fin-inf-append2)
  from h1 and h2 have sg2:lose (Suc (Suc t)) = [True] ∨ lose (Suc (Suc t)) =
[False]
   by (simp add: ts-bool-True-False)
  show ?thesis
  proof (cases lose (Suc (Suc t)) = [False])
   assume a1:lose (Suc (Suc t)) = [False]
   from h1 and a1 and sg1 show ?thesis
    by (simp add: tiTable-SampleT-def)
```

```
  next
    assume a2:lose (Suc (Suc t)) ≠ [False]
    from h3 have sg3:ack (Suc (Suc t)) = [connection-ok] by auto
    from h1 and a2 and sg1 and sg2 and sg3 show ?thesis
      by (simp add: tiTable-SampleT-def)
  qed
qed


lemma tiTable-i1-4b:
  assumes h1:tiTable-SampleT req x stop lose
                (fin-inf-append [init-state] st)
                 b ack i1 vc st
      and h2:ts lose
      and h3:msg (Suc 0) x
      and h4:msg (Suc 0) stop
      and h5:∀ t1 ≤ t. req t1 = []
      and h6:req (Suc t) = [init]
      and h7:∀ m < k + 3. req (t + m) ≠ [send]
      and h7:∀ m ≤ k. ack (Suc (Suc (t + m))) = [connection-ok]
      and h8:∀ j ≤ k + 3. lose (t + j) = [False]
      and h9:t2 < (t + 3 + k)
  shows i1 t2 = []
proof (cases t2 ≤ t)
  assume a1:t2 ≤ t
  from assms and a1 show ?thesis by (simp add: tiTable-i1-3)
next
  assume a2:¬ t2 ≤ t
  from assms have sg1:ack t = [init-state] by (simp add: tiTable-ack-init)
  from assms have sg2:st t =  hd (ack t) by (simp add: tiTable-ack-st-hd)
  from sg1 and sg2 have sg3:
   (fin-inf-append [init-state] st) (Suc t) = init-state
    by (simp add: correct-fin-inf-append2)
  from assms and sg3 have sg4:st (Suc t) = call
    by (simp add: tiTable-SampleT-def)
  show ?thesis
  proof (cases t2 = Suc t)
    assume a3:t2 = Suc t
    from assms and sg3 and a3 show ?thesis
      by (simp add: tiTable-SampleT-def)
  next
    assume a4:t2 ≠ Suc t
   from assms and sg4 and a4 and a2 have sg7:st (Suc (Suc t)) = connection-ok
      by (simp add: tiTable-st-call-ok)
    from assms have sg8:ack (Suc (Suc t)) = [st (Suc (Suc t))]
      by (simp add: tiTable-ack-st)
    show ?thesis
    proof (cases t2 =  Suc (Suc t))
      assume a5:t2 =  Suc (Suc t)
```

```
    from h7 and h9 and a5 have sg9:ack t2 = [connection-ok] by auto
    from assms and sg9 show ?thesis by (simp add:  tiTable-i1-1)
   next
    assume a6:t2 ≠ Suc (Suc t)
    from a6 and a4 and a2 have sg10:Suc (Suc t) < t2 by arith
    from h7 and h9 and sg10 have sg11:ack t2 = [connection-ok]
     by (simp add: aux-ack-t2)
    from assms and a6 and sg7 and sg8 and sg11 show ?thesis
     by (simp add:  tiTable-i1-1)
   qed
  qed
qed


lemma tiTable-i1-4:
  assumes h1:tiTable-SampleT req a1 stop lose
                (fin-inf-append [init-state] st)
                 b ack i1 vc st
     and h2:ts lose
     and h3:msg (Suc 0) a1
     and h4:msg (Suc 0) stop
     and h5:∀ t1 ≤ t. req t1 = []
     and h6:req (Suc t) = [init]
     and h7:∀ m < k + 3. req (t + m) ≠ [send]
     and h7:∀ m ≤ k. ack (Suc (Suc (t + m))) = [connection-ok]
     and h8:∀ j ≤ k + 3. lose (t + j) = [False]
  shows ∀ t2 < (t + 3 + k). i1 t2 = []
using assms by (simp add: tiTable-i1-4b)


lemma tiTable-ack-ok:
  assumes h1:∀ j≤ d + 2. lose (t + j) = [False]
     and h2:ts lose
     and h4:msg (Suc 0) stop
     and h5:msg (Suc 0) a1
     and h6:req (Suc t) ≠ [send]
     and h7:ack t = [connection-ok]
     and h8:tiTable-SampleT req a1 stop lose (fin-inf-append [init-state] st) b ack
i1 vc st
  shows ack (Suc t) = [connection-ok]
proof −
  from h8 and h2 and h5 and h4 have sg1:st t =  hd (ack t)
   by (simp add: tiTable-ack-st-hd)
  from sg1 and h7 have sg2:
   (fin-inf-append [init-state] st) (Suc t) =  connection-ok
    by (simp add: correct-fin-inf-append2)
  have sg3a:Suc 0 ≤ d + 2 by arith
  from h1 and sg3a have sg3:lose (t + Suc 0) = [False] by auto
  from sg2 and sg3 and h6 and h8 show ?thesis
```

by (*simp add*: *tiTable-SampleT-def*)
qed

lemma *Gateway-L7a*:
assumes *h1*:*Gateway req dt a stop lose d ack i vc*
and *h2*:*msg* (*Suc 0*) *a*
and *h3*:*msg* (*Suc 0*) *stop*
and *h4*:*msg* (*Suc 0*) *req*
and *h5*:*ts lose*
and *h6*:$\forall j \leq d + 2$. *lose* $(t + j) = [False]$
and *h7*:*req* (*Suc t*) $\neq [send]$
and *h8*:*ack* (*t*) $= [connection\text{-}ok]$
shows *ack* (*Suc t*) $= [connection\text{-}ok]$
proof −
from *h1* **and** *h3* **and** *h4* **and** *h7* **obtain** *i1 i2 a1 a2* **where**
ah1:*Sample req dt a1 stop lose ack i1 vc* **and**
ah2:*Delay a2 i1 d a1 i2* **and**
ah3:*Loss lose a i2 a2 i*
by (*simp add*: *Gateway-def*, *auto*)
from *ah2* **and** *ah3* **and** *h2* **have** *sg1*:*msg* (*Suc 0*) *a1*
by (*simp add*: *Loss-Delay-msg-a*)
from *ah1* **and** *sg1* **and** *h3* **and** *h4* **obtain** *st buffer* **where**
ah4:*Sample-L req dt a1 stop lose* (*fin-inf-append* [*init-state*] *st*)
(*fin-inf-append* [[]] *buffer*)
ack i1 vc st buffer
by (*simp add*: *Sample-def*, *auto*)
from *ah4* **have** *sg2*:
tiTable-SampleT req a1 stop lose (*fin-inf-append* [*init-state*] *st*)
(*fin-inf-append* [[]] *buffer*)
ack i1 vc st
by (*simp add*: *Sample-L-def*)
from *h6* **and** *h5* **and** *h3* **and** *sg1* **and** *h7* **and** *h8* **and** *sg2* **show** *?thesis*
by (*simp add*: *tiTable-ack-ok*)
qed

lemma *Sample-L-buffer*:
assumes *h1*:
Sample-L req dt a1 stop lose (*fin-inf-append* [*init-state*] *st*)
(*fin-inf-append* [[]] *buffer*)
ack i1 vc st buffer
shows *buffer t* $=$ *inf-last-ti dt t*
proof −
from *h1* **have** *sg1*:
$\forall t$. *buffer t* $=$
(*if dt t* $=$ [] *then fin-inf-append* [[]] *buffer t else dt t*)
by (*simp add*: *Sample-L-def*)
from *sg1* **show** *?thesis*

```
  proof (induct t)
    case 0
    from this show ?case
      by (simp add: fin-inf-append-def)
  next
    fix t
    case (Suc t)
    from this show ?case
    proof (cases dt t = [])
      assume a1:dt t = []
      from a1 and Suc show ?thesis
        by (simp add: correct-fin-inf-append1)
    next
      assume a2:dt t ≠ []
      from a2 and Suc show ?thesis
        by (simp add: correct-fin-inf-append1)
    qed
  qed
qed


lemma tiTable-SampleT-i1-buffer:
  assumes h1:ack t = [connection-ok]
      and h2:req (Suc t) = [send]
      and h3:∀ k≤Suc d. lose (t + k) = [False]
      and h4: buffer t = inf-last-ti dt t
     and h6:tiTable-SampleT req a1 stop lose (fin-inf-append [init-state] st)
      (fin-inf-append [[]] buffer) ack
      i1 vc st
     and h7:st t = hd (ack t)
     and h8:fin-inf-append [init-state] st (Suc t) = connection-ok
  shows i1 (Suc t) = inf-last-ti dt t
proof −
  have sg1:Suc 0 ≤Suc d by arith
  from h3 and sg1 have sg2:lose (Suc t) = [False] by auto
  from h6 have
   fin-inf-append [init-state] st (Suc t) = connection-ok ∧
    req (Suc t) = [send] ∧
    lose (Suc t) = [False] ⟶
    ack (Suc t) = [sending-data] ∧
    i1 (Suc t) = (fin-inf-append [[]] buffer) (Suc t) ∧
    vc (Suc t) = [] ∧ st (Suc t) = sending-data
    by (simp add: tiTable-SampleT-def)
  from this and h8 and h2 and sg2 have
   i1 (Suc t) = (fin-inf-append [[]] buffer) (Suc t) by simp
  from this and h4 show ?thesis by (simp add: correct-fin-inf-append1)
qed
```

lemma *Sample-L-i1-buffer*:
assumes *h1*:*msg* (*Suc 0*) *req*
and *h2*:*msg* (*Suc 0*) *a*
and *h3*:*msg* (*Suc 0*) *stop*
and *h4*:*msg* (*Suc 0*) *a1*
and *h5*:*ts lose*
and *h6*:*ack t* = [*connection-ok*]
and *h7*:*req* (*Suc t*) = [*send*]
and *h8*:∀ *k*≤*Suc d*. *lose* (*t* + *k*) = [*False*]
and *h9*:*Sample-L req dt a1 stop lose*
(*fin-inf-append* [*init-state*] *st*)
(*fin-inf-append* [[]] *buffer*) *ack i1 vc st buffer*
shows *i1* (*Suc t*) = *buffer t*
proof −
from *h9* **have** *sg1*:*buffer t* = *inf-last-ti dt t*
by (*simp add*: *Sample-L-buffer*)
from *h9* **have** *sg2*:
∀ *t*. *buffer t* = (*if dt t* = [] *then fin-inf-append* [[]] *buffer t else dt t*)
by (*simp add*: *Sample-L-def*)
from *h9* **have** *sg3*:
tiTable-SampleT req a1 stop lose (*fin-inf-append* [*init-state*] *st*)
(*fin-inf-append* [[]] *buffer*) *ack*
i1 vc st
by (*simp add*: *Sample-L-def*)
from *sg3* **and** *h5* **and** *h4* **and** *h3* **have** *sg4*:*st t* = *hd* (*ack t*)
by (*simp add*: *tiTable-ack-st-hd*)
from *h6* **and** *sg4* **have** *sg5*:
(*fin-inf-append* [*init-state*] *st*) (*Suc t*) = *connection-ok*
by (*simp add*: *correct-fin-inf-append1*)
from *h6* **and** *h7* **and** *h8* **and** *sg1* **and** *sg3* **and** *sg4* **and** *sg5* **have** *sg6*:
i1 (*Suc t*) = *inf-last-ti dt t*
by (*simp add*: *tiTable-SampleT-i1-buffer*)
from *this* **and** *sg1* **show** *?thesis* **by** *simp*
qed

lemma *tiTable-SampleT-sending-data*:
assumes *h1*: *tiTable-SampleT req a1 stop lose* (*fin-inf-append* [*init-state*] *st*)
(*fin-inf-append* [[]] *buffer*)
ack i1 vc st
and *h2*:∀ *j*≤*2* ∗ *d*. *lose* (*t* + *j*) = [*False*]
and *h3*:∀ *t4*≤*t* + *d* + *d*. *a1 t4* = []
and *h4*:*ack* (*t* + *x*) = [*sending-data*]
and *h5*:*fin-inf-append* [*init-state*] *st* (*Suc* (*t* + *x*)) = *sending-data*
and *h6*:*Suc* (*t* + *x*) ≤ *2* ∗ *d* + *t*
shows *ack* (*Suc* (*t* + *x*)) = [*sending-data*]
proof −
from *h6* **have** *Suc x* ≤ *2* ∗ *d* **by** *arith*
from *this* **and** *h2* **have** *sg1*:*lose* (*t* + *Suc x*) = [*False*] **by** *auto*

from *h6* **have** *Suc* $(t + x) \leq t + d + d$ **by** *arith*
from *this* **and** *h3* **have** *sg2*:*a1* (*Suc* $(t + x)) = []$ **by** *auto*
from *h1* **and** *sg1* **and** *sg2* **and** *h5* **show** *?thesis*
by (*simp add*: *tiTable-SampleT-def*)
qed

lemma *Sample-sending-data*:
assumes *h1*:*msg* (*Suc 0*) *stop*
and *h2*:*ts lose*
and *h3*:*msg* (*Suc 0*) *req*
and *h4*:*msg* (*Suc 0*) *a1*
and *h5*:$\forall j \leq 2 * d$. *lose* $(t + j) = [False]$
and *h6*:*ack* $t = [sending\text{-}data]$
and *h7*:*Sample req dt a1 stop lose ack i1 vc*
and *h8*:$x \leq d + d$
and *h9*:$\forall t4 \leq t + d + d$. *a1 t4* $= []$
shows *ack* $(t + x) = [sending\text{-}data]$
using *assms*
proof −
from *h1* **and** *h3* **and** *h4* **and** *h7* **obtain** *st buffer* **where** *a1*:
Sample-L req dt a1 stop lose (*fin-inf-append* [*init-state*] *st*)
(*fin-inf-append* [[]] *buffer*) *ack*
i1 vc st buffer
by (*simp add*: *Sample-def*, *auto*)
from *a1* **have** *sg1*:
tiTable-SampleT req a1 stop lose (*fin-inf-append* [*init-state*] *st*)
(*fin-inf-append* [[]] *buffer*)
ack i1 vc st
by (*simp add*: *Sample-L-def*)
from *a1* **have** *sg2*:
$\forall t$. *buffer* $t =$ (*if dt* $t = []$ *then fin-inf-append* [[]] *buffer t else dt t*)
by (*simp add*: *Sample-L-def*)
from *h1* **and** *h2* **and** *h4* **and** *h6* **and** *h8* **and** *sg1* **and** *sg2* **show** *?thesis*
proof (*induct x*)
case *0*
from *this* **show** *?case* **by** *simp*
next
fix *x*
case (*Suc x*)
from *this* **have** *sg3*:*st* $(t + x) = hd$ (*ack* $(t + x)$)
by (*simp add*: *tiTable-ack-st-hd*)
from *Suc* **have** *sg4*:$x \leq d + d$ **by** *arith*
from *Suc* **and** *sg3* **and** *sg4* **have** *sg5*:
(*fin-inf-append* [*init-state*] *st*) (*Suc* $(t + x)$) = *sending-data*
by (*simp add*: *fin-inf-append-def*)
from *Suc* **have** *sg6*:*Suc* $(t + x) \leq 2 * d + t$ **by** *simp*
from *Suc* **have** *sg7*:*ack* $(t + x) = [sending\text{-}data]$ **by** *simp*
from *sg1* **and** *h5* **and** *h9* **and** *sg7* **and** *sg5* **and** *sg6* **have** *sg7*:

ack (*Suc* (*t* + *x*)) = [*sending-data*]
by (*simp add*: *tiTable-SampleT-sending-data*)
from *this* **show** *?case* **by** *simp*
qed
qed

15.6 Properties of the ServiceCenter component

lemma *ServiceCenter-a-l*:
assumes *h1*:*ServiceCenter i a*
shows *length* (*a t*) ≤ (*Suc 0*)
proof (*cases t*)
case *0*
from *this* **and** *h1* **show** *?thesis* **by** (*simp add*: *ServiceCenter-def*)
next
fix *m* **assume** *Suc*:*t* = *Suc m*
from *this* **and** *h1* **show** *?thesis* **by** (*simp add*: *ServiceCenter-def*)
qed

lemma *ServiceCenter-a-msg*:
assumes *h1*:*ServiceCenter i a*
shows *msg* (*Suc 0*) *a*
using *assms* **by** (*simp add*: *msg-def ServiceCenter-a-l*)

lemma *ServiceCenter-L1*:
assumes *h1*:∀ *t2* < *x*. *i t2* = []
and *h2*:*ServiceCenter i a*
and *h3*:*t* ≤ *x*
shows *a t* = []
using *assms*
proof (*induct t*)
case *0*
from *this* **show** *?case* **by** (*simp add*: *ServiceCenter-def*)
next
case (*Suc t*)
from *this* **show** *?case* **by** (*simp add*: *ServiceCenter-def*)
qed

lemma *ServiceCenter-L2*:
assumes *h1*:∀ *t2* < *x*. *i t2* = []
and *h2*:*ServiceCenter i a*
shows ∀ *t3* ≤ *x*. *a t3* = []
using *assms* **by** (*clarify*, *simp add*: *ServiceCenter-L1*)

15.7 General properties of stream values

lemma *streamValue1*:
assumes *h1*:∀*j*≤ *D* + (*z*::*nat*). *str* (*t* + *j*) = *x*
and *h2*: *j*≤ *D*
shows *str* (*t* + *j* + *z*) = *x*

proof −
  from *h2* **have** *sg1*: $j + z \leq D + z$ **by** *arith*
  have *sg2*:$t + j + z = t + (j + z)$ **by** *arith*
  from *h1* **and** *sg1* **and** *sg2* **show** *?thesis* **by** (*simp* (*no-asm-simp*))
qed

lemma *streamValue2*:
 assumes *h1*:$\forall j \leq D + (z::nat).\ str\ (t + j) = x$
 shows $\forall j \leq D.\ str\ (t + j + z) = x$
using *assms* **by** (*clarify*, *simp add*: *streamValue1*)

lemma *streamValue3*:
 assumes *h1*:$\forall j \leq D.\ str\ (t + j + (Suc\ y)) = x$
  and *h2*:$j \leq D$
  and *h3*:$str\ (t + y) = x$
 shows $str\ (t + j + y) = x$
using *assms*
proof (*induct j*)
 case *0*
 from *h3* **show** *?case* **by** *simp*
next
 case (*Suc j*)
 from *this* **show** *?case* **by** *auto*
qed

lemma *streamValue4*:
 assumes *h1*:$\forall j \leq D.\ str\ (t + j + (Suc\ y)) = x$
  and *h3*:$str\ (t + y) = x$
 shows $\forall j \leq D.\ str\ (t + j + y) = x$
using *assms*
 by (*clarify*, *simp add*: *streamValue3*)

lemma *streamValue5*:
 assumes *h1*:$\forall j \leq D.\ str\ (t + j + ((i::nat) + k)) = x$
  and *h2*:$j \leq D$
 shows $str\ (t + i + k + j) = x$
proof −
  have *sg1*:$t + i + k + j = t + j + (i + k)$ **by** *arith*
  from *assms* **and** *sg1* **show** *?thesis* **by** (*simp* (*no-asm-simp*))
qed

lemma *streamValue6*:
 assumes *h1*:$\forall j \leq D.\ str\ (t + j + ((i::nat) + k)) = x$
 shows $\forall j \leq D.\ str\ (t + (i::nat) + k + j) = x$
using *assms* **by** (*clarify*, *simp add*: *streamValue5*)

lemma *streamValue7*:
 assumes *h1*:$\forall j \leq d.\ str\ (t + i + k + d + Suc\ j) = x$
  and *h2*:$str\ (t + i + k + d) = x$

```
    and h3:j≤ Suc d
  shows      str (t + i + k + d + j) = x
proof −
  from h1 have sg1:str (t + i + k + d + Suc d) = x
    by (simp (no-asm-simp), simp)
  from assms show ?thesis
  proof (cases j = Suc d)
    assume a1:j = Suc d
    from a1 and sg1 show ?thesis by simp
  next
    assume a2:j ≠ Suc d
    from a2 and h3 have sg2:j≤d by auto
    from assms and sg2 show ?thesis
    proof (cases j > 0)
      assume a3:0 < j
      from a3 and h3 have sg3:j − (1::nat) ≤ d by simp
      from a3 have sg4:Suc (j − (1::nat)) = j  by arith
      from sg3 and h1 and sg4 have sg5:str (t + i + k + d + j) = x by auto
      from sg5 show ?thesis by simp
    next
      assume a4:¬ 0 < j
      from a4 have sg6:j = 0 by simp
      from h2 and sg6 show ?thesis by simp
    qed
  qed
qed

lemma streamValue8:
  assumes h1:∀ j≤d. str (t + i + k + d + Suc j) = x
    and h2:str (t + i + k + d) = x
  shows      ∀ j≤ Suc d. str (t + i + k + d + j) = x
using assms by (clarify, simp add: streamValue7)


lemma arith-streamValue9aux:
Suc (t + (j + d) + (i + k)) =  Suc (t + i + k + d + j)
by arith

lemma streamValue9:
  assumes h1:∀ j≤2 ∗ d. str (t + j + Suc (i + k)) = x
    and h2:j≤d
  shows      str (t + i + k + d + Suc j) = x
proof −
  from h2 have (j+d) ≤2 ∗ d by arith
  from h1 and this have str (t + (j + d) + Suc (i + k)) = x by auto
  from this show ?thesis  by (simp add: arith-streamValue9aux)
qed
```

lemma *streamValue10*:
assumes *h1*:$\forall j{\leq}2 * d.\ str\ (t + j + Suc\ (i + k)) = x$
shows $\forall j{\leq}d.\ str\ (t + i + k + d + Suc\ j) = x$
using *assms*
apply *clarify*
by (*rule streamValue9*, *auto*)

lemma *arith-sum1*:$(t::nat) + (i + k + d) = t + i + k + d$
by *arith*

lemma *arith-sum2*:$Suc\ (Suc\ (t + k + j)) = Suc\ (Suc\ (t + (k + j)))$
by *arith*

lemma *arith-sum4*:$t + 3 + k + d = Suc\ (t + (2::nat) + k + d)$
by *arith*

lemma *streamValue11*:
assumes *h1*:$\forall j{\leq}2 * d + (4 + k).\ lose\ (t + j) = x$
and *h2*:$j{\leq}Suc\ d$
shows $lose\ (t + 2 + k + j) = x$
proof −
from *h2* **have** *sg1*:$2 + k + j \leq 2 * d + (4 + k)$ **by** *arith*
have *sg2*:$Suc\ (Suc\ (t + k + j)) = Suc\ (Suc\ (t + (k + j)))$ **by** *arith*
from *sg1* **and** *h1* **have** $lose\ (t + (2 + k + j)) = x$ **by** *blast*
from *this* **and** *sg2* **show** *?thesis* **by** (*simp add*: *arith-sum2*)
qed

lemma *streamValue12*:
assumes *h1*:$\forall j{\leq}2 * d + (4 + k).\ lose\ (t + j) = x$
shows $\forall j{\leq}Suc\ d.\ lose\ (t + 2 + k + j) = x$
using *assms*
apply *clarify* **by** (*rule streamValue11*, *auto*)

lemma *streamValue43*:
assumes *h1*:$\forall j{\leq}2 * d + ((4::nat) + k).\ lose\ (t + j) = [False]$
shows $\forall j{\leq}2 * d.\ lose\ ((t + (3::nat) + k) + j) = [False]$
proof −
from *h1* **have** *sg1*:$\forall j{\leq}2 * d.\ lose\ (t + j + (4 + k)) = [False]$
by (*simp add*: *streamValue2*)
have *sg2*:$Suc\ (3 + k) = (4 + k)$ **by** *arith*
from *sg1* **and** *sg2* **have** *sg3*:$\forall j{\leq}2 * d.\ lose\ (t + j + Suc\ (3 + k)) = [False]$
by (*simp* (*no-asm-simp*))
from *h1* **have** *sg4*:$lose\ (t + (3 + k)) = [False]$ **by** *auto*
from *sg3* **and** *sg4* **have** *sg5*:$\forall j{\leq}2 * d.\ lose\ (t + j + (3 + k)) = [False]$
by (*rule streamValue4*)
from *sg5* **show** *?thesis* **by** (*rule streamValue6*)
qed

end

theory *Gateway-proof*
imports *Gateway-proof-aux*
begin

15.8 Properties of the Gateway

lemma *Gateway-L1*:
  assumes *h1*:*Gateway req dt a stop lose d ack i vc*
      and *h2*:*msg* (*Suc 0*) *req*
      and *h3*:*msg* (*Suc 0*) *a*
      and *h4*:*msg* (*Suc 0*) *stop*
      and *h5*:*ts lose*
      and *h6*:*ack t* = [*init-state*]
      and *h7*:*req* (*Suc t*) = [*init*]
      and *h8*:*lose* (*Suc t*) = [*False*]
      and *h9*:*lose* (*Suc* (*Suc t*)) = [*False*]
  shows *ack* (*Suc* (*Suc t*)) = [*connection-ok*]
proof −
  from *h1* **obtain** *i1 i2 x y*
    where *a1*:*Sample req dt x stop lose ack i1 vc*
      and *a2*:*Delay y i1 d x i2*
      and *a3*:*Loss lose a i2 y i*
    by (*simp only*: *Gateway-def*, *auto*)
  from *a2* **and** *a3* **and** *h3* **have** *sg1*:*msg* (*Suc 0*) *x*
    by (*simp add*: *Loss-Delay-msg-a*)
  from *a1* **and** *h2* **and** *h4* **and** *sg1* **obtain** *st buffer* **where** *a4*:
    tiTable-SampleT req x stop lose
        (*fin-inf-append* [*init-state*] *st*) (*fin-inf-append* [[]] *buffer*) *ack*
         i1 vc st
     by (*simp add*: *Sample-def Sample-L-def*, *auto*)
  from *a4* **and** *h5* **and** *sg1* **and** *h4* **have** *sg2*:*st t* = *hd* (*ack t*)
    by (*simp add*: *tiTable-ack-st-hd*)
  from *h6* **and** *sg1* **and** *sg2* **and** *h4* **have** *sg3*:
   (*fin-inf-append* [*init-state*] *st*) (*Suc t*) = *init-state*
    by (*simp add*: *correct-fin-inf-append1*)
  from *a4* **and** *h7* **and** *sg3* **have** *sg4*:*st* (*Suc t*) = *call*
    by (*simp add*: *tiTable-SampleT-def*)
  from *sg4* **have** *sg5*:(*fin-inf-append* [*init-state*] *st*) (*Suc* (*Suc t*)) = *call*
    by (*simp add*: *correct-fin-inf-append1*)
  from *a4* **and** *sg5* **and** *assms* **show** *?thesis*
    by (*simp add*: *tiTable-SampleT-def*)
qed

lemma *Gateway-L2*:
assumes *h1*:*Gateway req dt a stop lose d ack i vc*
and *h2*:*msg* (*Suc 0*) *req*
and *h3*:*msg* (*Suc 0*) *a*
and *h4*:*msg* (*Suc 0*) *stop*
and *h5*:*ts lose*
and *h6*:*ack t* = [*connection-ok*]
and *h7*:*req* (*Suc t*) = [*send*]
and *h8*:∀ *k*≤*Suc d*. *lose* (*t* + *k*) = [*False*]
shows *i* (*Suc* (*t* + *d*)) = *inf-last-ti dt t*
proof −
from *h1* **obtain** *i1 i2 x y*
where *a1*:*Sample req dt x stop lose ack i1 vc*
and *a2*:*Delay y i1 d x i2*
and *a3*:*Loss lose a i2 y i*
by (*simp only*: *Gateway-def*, *auto*)
from *a2* **and** *a3* **and** *h3* **have** *sg1*:*msg* (*Suc 0*) *x*
by (*simp add*: *Loss-Delay-msg-a*)
from *a1* **and** *h2* **and** *h4* **and** *sg1* **obtain** *st buffer* **where** *a4*:
Sample-L req dt x stop lose (*fin-inf-append* [*init-state*] *st*)
(*fin-inf-append* [[]] *buffer*) *ack i1 vc st buffer*
by (*simp add*: *Sample-def*, *auto*)
from *a4* **have** *sg2*:*buffer t* = *inf-last-ti dt t*
by (*simp add*: *Sample-L-buffer*)
from *assms* **and** *a1* **and** *a4* **and** *sg1* **and** *sg2* **have** *sg3*:*i1* (*Suc t*) = *buffer t*
by (*simp add*: *Sample-L-i1-buffer*)
from *a2* **and** *sg1* **have** *sg4*:*i2* ((*Suc t*) + *d*) = *i1* (*Suc t*)
by (*simp add*: *Delay-def*)
from *a3* **and** *h8* **have** *sg5*:*i* ((*Suc t*) + *d*) = *i2* ((*Suc t*) + *d*)
by (*simp add*: *Loss-def*, *auto*)
from *sg5* **and** *sg4* **and** *sg3* **and** *sg2* **show** *?thesis* **by** *simp*
qed

lemma *Gateway-L3*:
assumes *h1*:*Gateway req dt a stop lose d ack i vc*
and *h2*:*msg* (*Suc 0*) *req*
and *h3*:*msg* (*Suc 0*) *a*
and *h4*:*msg* (*Suc 0*) *stop*
and *h5*:*ts lose*
and *h6*:*ack t* = [*connection-ok*]
and *h7*:*req* (*Suc t*) = [*send*]
and *h8*:∀ *k*≤*Suc d*. *lose* (*t* + *k*) = [*False*]
shows *ack* (*Suc t*) = [*sending-data*]
proof −
from *h1* **obtain** *i1 i2 x y*
where *a1*:*Sample req dt x stop lose ack i1 vc*
and *a2*:*Delay y i1 d x i2*
and *a3*:*Loss lose a i2 y i*
by (*simp only*: *Gateway-def*, *auto*)

```
  from a2 and a3 and h3 have sg1:msg (Suc 0) x
    by (simp add: Loss-Delay-msg-a)
  from a1 and h2 and h4 and sg1 obtain st buffer where a4:
    tiTable-SampleT req x stop lose
        (fin-inf-append [init-state] st) (fin-inf-append [[]] buffer) ack
         i1 vc st
     by (simp add: Sample-def Sample-L-def, auto)
  from a4 and h5 and sg1 and h4 have sg2:st t =  hd (ack t)
    by (simp add: tiTable-ack-st-hd)
 from sg2 and h6 have sg3:(fin-inf-append [init-state] st) (Suc t) = connection-ok
    by (simp add: correct-fin-inf-append1)
  from h8 have sg4:lose (Suc t) = [False] by auto
  from a4 and sg3 and sg4 and h7 have sg5:st (Suc t) = sending-data
    by (simp add: tiTable-SampleT-def)
  from a4 and h2 and sg1 and h4 and h5 have sg6:ack (Suc t) = [st (Suc t)]
    by (simp add: tiTable-ack-st)
  from sg5 and sg6 show ?thesis by simp
qed

lemma Gateway-L4:
  assumes h1:Gateway req dt a stop lose d ack i vc
      and h2:msg (Suc 0) req
      and h3:msg (Suc 0) a
      and h4:msg (Suc 0) stop
      and h5:ts lose
      and h6:ack (t + d) = [sending-data]
      and h7:a (Suc t) = [sc-ack]
      and h8:∀ k≤Suc d. lose (t + k) = [False]
  shows vc (Suc (t + d)) = [vc-com]
proof −
  from h1 obtain i1 i2 x y
    where a1:Sample req dt x stop lose ack i1 vc
      and a2:Delay y i1 d x i2
      and a3:Loss lose a i2 y i
    by (simp only: Gateway-def, auto)
  from a2 and a3 and h3 have sg1:msg (Suc 0) x
    by (simp add: Loss-Delay-msg-a)
  from a1 and h2 and h4 and sg1 obtain st buffer where a4:
    tiTable-SampleT req x stop lose
        (fin-inf-append [init-state] st) (fin-inf-append [[]] buffer) ack
         i1 vc st
     by (simp add: Sample-def Sample-L-def, auto)
  from a4 and h5 and sg1 and h4 have sg2:st (t+d) =  hd (ack (t+d))
    by (simp add: tiTable-ack-st-hd)
 from sg2 and h6 have sg3:(fin-inf-append [init-state] st) (Suc (t+d)) = sending-data
    by (simp add: correct-fin-inf-append1)
  from a3 and h8 have sg4:y (Suc t)  =  a (Suc t)
    by (simp add: Loss-def, auto)
  from a2 and sg1 have sg5:x ((Suc t) + d)  =  y (Suc t)
```

by (*simp add*: *Delay-def*)
from *sg5* **and** *sg4* **and** *h7* **have** *sg6*: *x* (*Suc* (*t* + *d*)) = [*sc-ack*] **by** *simp*
from *h8* **have** *sg7*:*lose* (*Suc* (*t* + *d*)) = [*False*] **by** *auto*
from *sg6* **and** *a4* **and** *h2* **and** *sg1* **and** *h4* **and** *h5* **and** *sg7* **and** *sg3* **show** *?thesis*
by (*simp add*: *tiTable-SampleT-def*)
qed

lemma *Gateway-L5*:
assumes *h1*:*Gateway req dt a stop lose d ack i vc*
and *h2*:*msg* (*Suc 0*) *req*
and *h3*:*msg* (*Suc 0*) *a*
and *h4*:*msg* (*Suc 0*) *stop*
and *h5*:*ts lose*
and *h6*:*ack* (*t* + *d*) = [*sending-data*]
and *h7*:∀ *j* ≤ *Suc d*. *a* (*t*+*j*) = []
and *h8*:∀ *k*≤ (*d* + *d*). *lose* (*t* + *k*) = [*False*]
shows *j* ≤ *d* ⟶ *ack* (*t*+*d*+*j*) = [*sending-data*]
proof −
from *h1* **obtain** *i1 i2 x y*
where *a1*:*Sample req dt x stop lose ack i1 vc*
and *a2*:*Delay y i1 d x i2*
and *a3*:*Loss lose a i2 y i*
by (*simp only*: *Gateway-def*, *auto*)
from *a2* **and** *a3* **and** *h3* **have** *sg1*:*msg* (*Suc 0*) *x*
by (*simp add*: *Loss-Delay-msg-a*)
from *a1* **and** *h2* **and** *h4* **and** *sg1* **obtain** *st buffer* **where** *a4*:
tiTable-SampleT req x stop lose
(*fin-inf-append* [*init-state*] *st*) (*fin-inf-append* [[]] *buffer*) *ack*
i1 vc st
by (*simp add*: *Sample-def Sample-L-def*, *auto*)
from *assms* **and** *a2* **and** *a3* **and** *sg1* **and** *a4* **show** *?thesis*
proof (*induct j*)
case *0*
from *0* **show** *?case* **by** *simp*
next
case (*Suc j*)
from *Suc* **show** *?case*
proof (*cases Suc j* ≤ *d*)
assume ¬ *Suc j* ≤ *d* **from** *this* **show** *?thesis* **by** *simp*
next
assume *a0*:*Suc j* ≤ *d*
from *a0* **have** *sg2*:*d* + *Suc j* ≤ *d* + *d* **by** *arith*
from *sg2* **have** *sg3*:*Suc* (*d* + *j*) ≤ *d* + *d* **by** *arith*
from *a4* **and** *h2* **and** *sg1* **and** *h4* **and** *h5* **have** *sg4*:
st (*t*+*d*+*j*) = *hd* (*ack* (*t*+*d*+*j*))
by (*simp add*: *tiTable-ack-st-hd*)
from *Suc* **and** *a0* **and** *sg4* **have** *sg5*:
(*fin-inf-append* [*init-state*] *st*) (*Suc* (*t*+*d*+*j*)) = *sending-data*

```
    by (simp add: correct-fin-inf-append1)
   from h7 and a0 have sg6:∀ j≤ d. a (t + Suc j) = [] by auto
   from sg6 and a3 and a0 and h5 have sg7:y (t + (Suc j)) = []
    by (rule Loss-L5Suc)
   from sg7 and a2 have sg8a:x (t + d + (Suc j)) = []
    by (simp add: Delay-def)
   from sg8a have sg8:x (Suc (t + d + j)) = [] by simp
   have sg9:Suc (t + d + j) = Suc (t + (d + j)) by arith
   from a4 have sg10:
    fin-inf-append [init-state] st (Suc (t + d + j)) = sending-data ∧
     x (Suc (t + d + j)) = [] ∧
     lose (Suc (t + d + j)) = [False] ⟶
     ack (Suc (t + d + j)) = [sending-data]
    by (simp add: tiTable-SampleT-def)
   from h8 and sg3 have sg11:lose (t + Suc (d + j)) = [False] by blast
   have sg12:Suc (t + d + j) = t + Suc (d + j) by arith
   from sg12 and sg11 have sg13:lose (Suc (t + d + j)) = [False]
    by (simp (no-asm-simp), simp)
  from sg10 and sg5 and sg8a and sg13 show ?thesis by simp
 qed
 qed
qed

lemma Gateway-L6-induction:
 assumes h1:msg (Suc 0) req
    and h2:msg (Suc 0) x
    and h3:msg (Suc 0) stop
    and h4:ts lose
    and h5:∀ j≤ k. lose (t + j) = [False]
    and h6:∀ m ≤ k. req (t + m) ≠ [send]
    and h7:ack t = [connection-ok]
    and h8:Sample req dt x1 stop lose ack i1 vc
    and h9:Delay x2 i1 d x1 i2
    and h10:Loss lose x i2 x2 i
    and h11:m ≤ k
 shows ack (t + m) = [connection-ok]
using assms
proof (induct m)
 case 0 from this show ?case by simp
next
 case (Suc m)
 from Suc have sg1:msg (Suc 0) x1 by (simp add: Loss-Delay-msg-a)
 from Suc and sg1 obtain st buffer where
   a1:tiTable-SampleT req x1 stop lose (fin-inf-append [init-state] st)
       (fin-inf-append [[]] buffer) ack i1 vc st and
   a2:∀ t. buffer t = (if dt t = [] then fin-inf-append [[]] buffer t else dt t)
   by (simp add: Sample-def Sample-L-def, auto)
 from a1 and sg1 and h3 and h4 have sg2:st (t + m) = hd (ack (t + m))
   by (simp add: tiTable-ack-st-hd)
```

```
  from Suc have sg3:ack (t + m) = [connection-ok] by simp
  from a1 and sg2 and sg3 have sg4:
  (fin-inf-append [init-state] st) (Suc (t + m)) = connection-ok
    by (simp add: fin-inf-append-def)
  from Suc have sg5:Suc m ≤ k by simp
  from sg5 and h5 have sg6:lose (Suc (t + m)) = [False] by auto
  from h6 and sg5 have sg7:req (Suc (t + m)) ≠ [send] by auto
  from a1 and sg3 and sg4 and sg5 and sg6 and sg7 show ?case
    by (simp add: tiTable-SampleT-def)
qed

lemma Gateway-L6:
 assumes h1:Gateway req dt a stop lose d ack i vc
     and h2:∀ m≤k. req (t + m) ≠ [send]
     and h3:∀ j≤k. lose (t + j) = [False]
     and h4:ack t = [connection-ok]
     and h5:msg (Suc 0) req
     and h6:msg (Suc 0) stop
     and h7:msg (Suc 0) a
     and h8:ts lose
 shows ∀ m≤k. ack (t + m) = [connection-ok]
using assms
by (simp add: Gateway-def, clarify, simp add: Gateway-L6-induction)

lemma Gateway-L6a:
 assumes h1:Gateway req dt a stop lose d ack i vc
     and h2:∀ m≤k. req (t + 2 + m) ≠ [send]
     and h3:∀ j≤k. lose (t + 2 + j) = [False]
     and h4:ack (t + 2) = [connection-ok]
     and h5:msg (Suc 0) req
     and h6:msg (Suc 0) stop
     and h7:msg (Suc 0) a
     and h8:ts lose
 shows ∀ m≤k. ack (t + 2 + m) = [connection-ok]
using assms by (rule Gateway-L6)

lemma aux-k3req:
 assumes h1:∀ m<k + 3. req (t + m) ≠ [send]  and h2:m ≤ k
 shows req (Suc (Suc (t + m))) ≠ [send]
proof −
  from h2 have m + 2 < k + 3 by arith
  from h1 and this have req (t + (m + 2)) ≠ [send] by blast
  from this show ?thesis by simp
qed

lemma aux3lose:
  assumes h1:∀ j≤k + d + 3. lose (t + j) = [False]
     and h2:j ≤ k
  shows lose (Suc (Suc (t + j))) = [False]
```

proof −
from *h2* **have** $j + 2 \leq k + d + 3$ **by** *arith*
from *h1* **and** *this* **have** *lose* $(t + (j + 2)) = [False]$ **by** *blast*
from *this* **show** *?thesis* **by** *simp*
qed

lemma *Gateway-L7*:
assumes *h1*:*Gateway req dt a stop lose d ack i vc*
and *h2*:*ts lose*
and *h3*:*msg* $(Suc\ 0)$ *a*
and *h4*:*msg* $(Suc\ 0)$ *stop*
and *h5*:*msg* $(Suc\ 0)$ *req*
and *h6*:*req* $(Suc\ t) = [init]$
and *h7*:$\forall\, m < (k + 3).$ *req* $(t + m) \neq [send]$
and *h8*:*req* $(t + 3 + k) = [send]$
and *h9*:*ack* $t = [init\text{-}state]$
and *h10*:$\forall\, j \leq k + d + 3.$ *lose* $(t + j) = [False]$
and *h11*:$\forall\ t1 \leq t.$ *req* $t1 = []$
shows $\forall\ t2 < (t + 3 + k + d).$ *i* $t2 = []$
proof −
have $Suc\ 0 \leq k + d + 3$ **by** *arith*
from *h10* **and** *this* **have** *lose* $(t + Suc\ 0) = [False]$ **by** *blast*
from *this* **have** *sg1*:*lose* $(Suc\ t) = [False]$ **by** *simp*
have $Suc\ (Suc\ 0) \leq k + d + 3$ **by** *arith*
from *h10* **and** *this* **have** *lose* $(t + Suc\ (Suc\ 0)) = [False]$ **by** *blast*
from *this* **have** *sg2*:*lose* $(Suc\ (Suc\ t)) = [False]$ **by** *simp*
from *h1* **and** *h2* **and** *h3* **and** *h4* **and** *h5* **and** *h6* **and** *h9* **and** *sg1* **and** *sg2*
have *sg3*:
ack $(t + 2) = [connection\text{-}ok]$
by (*simp add*: *Gateway-L1*)
from *h7* **and** *this* **have** *sg4*:$\forall\, m \leq k.$ *req* $((t + 2) + m) \neq [send]$
by (*auto*, *simp add*: *aux-k3req*)
from *h10* **have** *sg5*:$\forall\, j \leq k.$ *lose* $((t + 2) + j) = [False]$
by (*auto*, *simp add*: *aux3lose*)
from *h1* **and** *sg4* **and** *sg5* **and** *sg3* **and** *h5* **and** *h4* **and** *h3* **and** *h2* **have** *sg6*:
$\forall\, m \leq k.$ *ack* $((t + 2) + m) = [connection\text{-}ok]$
by (*rule Gateway-L6a*)
from *sg6* **have** *sg7*:*ack* $(t + 2 + k) = [connection\text{-}ok]$ **by** *auto*
from *h1* **obtain** *i1 i2 x y* **where**
a1:*Sample req dt x stop lose ack i1 vc* **and**
a2:*Delay y i1 d x i2* **and**
a3:*Loss lose a i2 y i*
by (*simp add*: *Gateway-def*, *auto*)
from *h3* **and** *a2* **and** *a3* **have** *sg8*:*msg* $(Suc\ 0)$ *x*
by (*simp add*: *Loss-Delay-msg-a*)
from *a1* **and** *sg8* **and** *h4* **and** *h5* **obtain** *st buffer* **where**
a4:*tiTable-SampleT req x stop lose* (*fin-inf-append* [*init-state*] *st*)
(*fin-inf-append* [[]] *buffer*) *ack i1 vc st* **and**
a5:$\forall\ t.$ *buffer* $t =$ (*if dt* $t = []$ *then fin-inf-append* [[]] *buffer t else dt t*)

```
    by (simp add: Sample-def Sample-L-def, auto)
  from a4 and h2 and sg8 and h4 and h11 and h6 and h7 and sg6 and h10
  have sg9:∀ t1 < (t + 3 + k). i1 t1 = []
    by (simp add: tiTable-i1-4)
  from sg9 and a2 have sg10:∀ t2 < (t + 3 + k + d). i2 t2 = []
    by (rule Delay-L2)
  from sg10 and a3 and h2 show ?thesis by (rule Loss-L2)
qed

lemma Gateway-L8a:
  assumes h1:Gateway req dt a stop lose d ack i vc
      and h2:msg (Suc 0) req
      and h3:msg (Suc 0) stop
      and h4:msg (Suc 0) a
      and h5:ts lose
      and h6:∀ j≤2 * d. lose (t + j) = [False]
      and h7:ack t = [sending-data]
      and h8:∀ t3 ≤ t + d. a t3 = []
      and h9:x ≤ d + d
  shows ack (t + x) = [sending-data]
proof −
  from h1 obtain i1 i2 x y where
    a1:Sample req dt x stop lose ack i1 vc and
    a2:Delay y i1 d x i2 and
    a3:Loss lose a i2 y i
    by (simp add: Gateway-def, auto)
  from h8 and a3 and h5 have sg1:∀ t3 ≤ t + d. y t3 = [] by (rule Loss-L6)
  from sg1 and a2 have sg2:∀ t4 ≤ t + d + d. x t4 = []  by (rule Delay-L4)
 from h4 and a2 and a3 have sg3:msg (Suc 0) x by (simp add: Loss-Delay-msg-a)
  from h3 and h5 and h2 and sg3 and h6 and h7 and a1 and h9 and sg2
show ?thesis
    by (simp add: Sample-sending-data)
qed

lemma Gateway-L8:
  assumes h1:Gateway req dt a stop lose d ack i vc
      and h2:msg (Suc 0) req
      and h3:msg (Suc 0) stop
      and h4:msg (Suc 0) a
      and h5:ts lose
      and h6:∀ j≤2 * d. lose (t + j) = [False]
      and h7:ack t = [sending-data]
      and h8:∀ t3 ≤ t + d. a t3 = []
  shows ∀ x ≤ d + d. ack (t + x) = [sending-data]
using assms
  by (simp add: Gateway-L8a)
```

15.9 Proof of the Refinement Relation for the Gateway Requirements

lemma *Gateway-L0*:
assumes *h1*:*Gateway req dt a stop lose d ack i vc*
shows *GatewayReq req dt a stop lose d ack i vc*
using *assms*
by (*simp add*: *GatewayReq-def Gateway-L1 Gateway-L2 Gateway-L3 Gateway-L4*)

15.10 Lemmas about Gateway Requirements

lemma *GatewayReq-L1*:
assumes *h1*:*msg* (*Suc 0*) *req*
and *h2*:*msg* (*Suc 0*) *stop*
and *h3*:*msg* (*Suc 0*) *a*
and *h4*:*ts lose*
and *h6*:*req* (*t* + *3* + *k*) = [*send*]
and *h7*:∀ *j*≤*2* ∗ *d* + (*4* + *k*). *lose* (*t* + *j*) = [*False*]
and *h9*:∀ *m*≤ *k*. *ack* (*t* + *2* + *m*) = [*connection-ok*]
and *h10*:*GatewayReq req dt a stop lose d ack i vc*
shows *ack* (*t* + *3* + *k*) = [*sending-data*]
proof −
from *h9* **have** *sg1*:*ack* (*Suc* (*Suc* (*t* + *k*))) = [*connection-ok*] **by** *auto*
from *h7* **have** *sg2*:
∀ *ka*≤*Suc d*. *lose* (*Suc* (*Suc* (*t* + *k* + *ka*))) = [*False*]
by (*simp add*: *aux-lemma-lose-1*)
from *h1* **and** *h2* **and** *h3* **and** *h4* **and** *h6* **and** *h10* **and** *sg1* **and** *sg2* **have** *sg3*:
ack (*t* + *2* + *k*) = [*connection-ok*] ∧
req (*Suc* (*t* + *2* + *k*)) = [*send*] ∧ (∀ *k*≤*Suc d*. *lose* (*t* + *k*) = [*False*]) ⟶
ack (*Suc* (*t* + *2* + *k*)) = [*sending-data*]
by (*simp add*: *GatewayReq-def*)
have *sg4*:*t* + *3* + *k* = *Suc* (*Suc* (*Suc* (*t* + *k*))) **by** *arith*
from *sg3* **and** *sg1* **and** *h6* **and** *h7* **and** *sg4* **show** *?thesis*
by (*simp add*: *eval-nat-numeral*)
qed

lemma *GatewayReq-L2*:
assumes *h1*:*msg* (*Suc 0*) *req*
and *h2*:*msg* (*Suc 0*) *stop*
and *h3*:*msg* (*Suc 0*) *a*
and *h4*:*ts lose*
and *h5*:*GatewayReq req dt a stop lose d ack i vc*
and *h6*:*req* (*t* + *3* + *k*) = [*send*]
and *h7*:*inf-last-ti dt t* ≠ []
and *h8*:∀ *j*≤*2* ∗ *d* + (*4* + *k*). *lose* (*t* + *j*) = [*False*]
and *h9*:∀ *m*≤*k*. *ack* (*t* + *2* + *m*) = [*connection-ok*]
shows *i* (*t* + *3* + *k* + *d*) ≠ []
proof −
from *h8* **have** *sg1*:(∀ (*x*::*nat*). *x* ≤ (*d*+*1*) ⟶ *lose* (*t*+*x*) = [*False*])
by (*simp add*: *aux-lemma-lose-2*)

from *h8* **have** *sg2*:$\forall\, ka{\leq}Suc\ d.\ lose\ (Suc\ (Suc\ (t + k + ka))) = [False]$
by (*simp add*: *aux-lemma-lose-1*)
from *h9* **have** *sg3*:$ack\ (t + 2 + k) = [connection\text{-}ok]$ **by** *simp*
from *h1* **and** *h2* **and** *h3* **and** *h4* **and** *h5* **and** *h6* **and** *sg2* **and** *sg3* **have** *sg4*:
$ack\ (t + 2 + k) = [connection\text{-}ok] \wedge$
$req\ (Suc\ (t + 2 + k)) = [send] \wedge (\forall\, k{\leq}Suc\ d.\ lose\ (t + k) = [False]) \longrightarrow$
$i\ (Suc\ (t + 2 + k + d)) = inf\text{-}last\text{-}ti\ dt\ (t + 2 + k)$
by (*simp add*: *GatewayReq-def*, *auto*)
from *h7* **have** *sg5*:$inf\text{-}last\text{-}ti\ dt\ (t + 2 + k) \neq []$
by (*simp add*: *inf-last-ti-nonempty-k*)
have *sg6*:$t + 3 + k = Suc\ (Suc\ (Suc\ (t + k)))$ **by** *arith*
have *sg7*:$t + 2 + k = Suc\ (Suc\ (t + k))$ **by** *arith*
from *sg1* **and** *sg2* **and** *sg3* **and** *sg4* **and** *sg5* **and** *sg6* **and** *sg7* **and** *h6* **show** *?thesis*
by (*simp add*: *eval-nat-numeral*)
qed

15.11 Properties of the Gateway System

lemma *GatewaySystem-L1aux*:
assumes *h1*:$msg\ (Suc\ 0)\ req$
and *h2*:$msg\ (Suc\ 0)\ stop$
and *h3*:$msg\ (Suc\ 0)\ a$
and *h4*:$ts\ lose$
and *h5*:$msg\ (Suc\ 0)\ req \wedge msg\ (Suc\ 0)\ a \wedge msg\ (Suc\ 0)\ stop \wedge ts\ lose \longrightarrow$
$(\forall\, t.\ (ack\ t = [init\text{-}state] \wedge$
$req\ (Suc\ t) = [init] \wedge lose\ (Suc\ t) = [False] \wedge$
$lose\ (Suc\ (Suc\ t)) = [False] \longrightarrow$
$ack\ (Suc\ (Suc\ t)) = [connection\text{-}ok]) \wedge$
$(ack\ t = [connection\text{-}ok] \wedge req\ (Suc\ t) = [send] \wedge$
$(\forall\, k{\leq}Suc\ d.\ lose\ (t + k) = [False]) \longrightarrow$
$i\ (Suc\ (t + d)) = inf\text{-}last\text{-}ti\ dt\ t \wedge ack\ (Suc\ t) = [sending\text{-}data]) \wedge$
$(ack\ (t + d) = [sending\text{-}data] \wedge a\ (Suc\ t) = [sc\text{-}ack] \wedge$
$(\forall\, k{\leq}Suc\ d.\ lose\ (t + k) = [False]) \longrightarrow$
$vc\ (Suc\ (t + d)) = [vc\text{-}com]))$
shows $ack\ (t + 3 + k + d + d) = [sending\text{-}data] \wedge$
$a\ (Suc\ (t + 3 + k + d)) = [sc\text{-}ack] \wedge$
$(\forall\, ka{\leq}Suc\ d.\ lose\ (t + 3 + k + d + ka) = [False]) \longrightarrow$
$vc\ (Suc\ (t + 3 + k + d + d)) = [vc\text{-}com]$
using *assms* **by** *blast*

lemma *GatewaySystem-L3aux*:
assumes *h1*:$msg\ (Suc\ 0)\ req$
and *h2*:$msg\ (Suc\ 0)\ stop$
and *h3*:$msg\ (Suc\ 0)\ a$
and *h4*:$ts\ lose$
and *h5*:$msg\ (Suc\ 0)\ req \wedge msg\ (Suc\ 0)\ a \wedge msg\ (Suc\ 0)\ stop \wedge ts\ lose \longrightarrow$
$(\forall\, t.\ (ack\ t = [init\text{-}state] \wedge$
$req\ (Suc\ t) = [init] \wedge lose\ (Suc\ t) = [False] \wedge$

lose (*Suc* (*Suc t*)) = [*False*] ⟶
ack (*Suc* (*Suc t*)) = [*connection-ok*]) ∧
(*ack t* = [*connection-ok*] ∧ *req* (*Suc t*) = [*send*] ∧
(∀ *k*≤*Suc d*. *lose* (*t* + *k*) = [*False*]) ⟶
i (*Suc* (*t* + *d*)) = *inf-last-ti dt t* ∧ *ack* (*Suc t*) = [*sending-data*]) ∧
(*ack* (*t* + *d*) = [*sending-data*] ∧ *a* (*Suc t*) = [*sc-ack*] ∧
(∀ *k*≤*Suc d*. *lose* (*t* + *k*) = [*False*]) ⟶
vc (*Suc* (*t* + *d*)) = [*vc-com*]))
shows *ack* (*t* + *2* + *k*) = [*connection-ok*] ∧
req (*Suc* (*t* + *2* + *k*)) = [*send*] ∧
(∀ *j*≤*Suc d*. *lose* (*t* + *2* + *k* + *j*) = [*False*]) ⟶
i (*Suc* (*t* + *2* + *k* + *d*)) = *inf-last-ti dt* (*t* + *2* + *k*)
using *assms* **by** *blast*

lemma *GatewaySystem-L1*:
assumes *h2*:*ServiceCenter i a*
and *h3*:*GatewayReq req dt a stop lose d ack i vc*
and *h4*:*msg* (*Suc 0*) *req*
and *h5*:*msg* (*Suc 0*) *stop*
and *h6*:*msg* (*Suc 0*) *a*
and *h7*:*ts lose*
and *h9*:∀ *j*≤*2* ∗ *d* + (*4* + *k*). *lose* (*t* + *j*) = [*False*]
and *h11*:*i* (*t* + *3* + *k* + *d*) ≠ []
and *h14*:∀ *x* ≤ *d* + *d*. *ack* (*t* + *3* + *k* + *x*) = [*sending-data*]
shows *vc* (*2* ∗ *d* + (*t* + (*4* + *k*))) = [*vc-com*]
proof −
from *h2* **have** ∀ *t*. *a* (*Suc t*) = (*if i t* = [] *then* [] *else* [*sc-ack*])
by (*simp add*:*ServiceCenter-def*)
from *this* **have** *sg1*:
a (*Suc* (*t* + *3* + *k* + *d*)) = (*if i* (*t* + *3* + *k* + *d*) = [] *then* [] *else* [*sc-ack*])
by *blast*
from *sg1* **and** *h11* **have** *sg2*:*a* (*Suc* (*t* + *3* + *k* + *d*)) = [*sc-ack*] **by** *auto*
from *h14* **have** *sg3*:*ack* (*t* + *3* + *k* + *2*∗*d*) = [*sending-data*] **by** *simp*
from *h4* **and** *h5* **and** *h6* **and** *h7* **and** *h3* **have** *sg4*:
ack (*t* + *3* + *k* + *d* + *d*) = [*sending-data*] ∧ *a* (*Suc* (*t* + *3* + *k* + *d*)) =
[*sc-ack*] ∧
(∀ *ka*≤*Suc d*. *lose* (*t* + *3* + *k* + *d* + *ka*) = [*False*]) ⟶
vc (*Suc* (*t* + *3* + *k* + *d* + *d*)) = [*vc-com*]
apply (*simp only*: *GatewayReq-def*)
by (*rule GatewaySystem-L1aux*, *auto*)
from *h9* **have** *sg5*:∀ *ka*≤*Suc d*. *lose* (*d* + (*t* + (*3* + *k*)) + *ka*) = [*False*]
by (*simp add*: *aux-lemma-lose-3*)
have *sg5a*:*d* + (*t* + (*3* + *k*)) = *t* + *3* + *k* + *d* **by** *arith*
from *sg5* **and** *sg5a* **have** *sg5b*:∀ *ka*≤*Suc d*. *lose* (*t* + *3* + *k* + *d* + *ka*) = [*False*]
by *auto*
have *sg6*:(*t* + *3* + *k* + *2* ∗ *d*) = (*2* ∗ *d* + (*t* + (*3* + *k*))) **by** *arith*
have *sg7*:*Suc* (*Suc* (*Suc* (*t* + *k* + (*d* + *d*)))) = *Suc* (*Suc* (*Suc* (*t* + *k* + *d* +
d))) **by** *arith*

have *sg8*:*Suc* (*Suc* (*Suc* (*Suc* (*t* + *k* + *d* + *d*)))) =
Suc (*Suc* (*Suc* (*Suc* (*d* + *d* + (*t* + *k*))))) **by** *arith*
from *sg4* **and** *sg3* **and** *sg2* **and** *sg5b* **and** *sg6* **and** *sg7* **and** *sg8* **show** *?thesis*
by (*simp add*: *eval-nat-numeral*)
qed

lemma *aux4lose1*:
assumes *h1*:∀ *j*≤*2* ∗ *d* + (*4* + *k*). *lose* (*t* + *j*) = [*False*]
and *h2*:*j* ≤ *k*
shows *lose* (*t* + (*2*::*nat*) + *j*) = [*False*]
proof −
from *h2* **have** (*2*::*nat*) + *j* ≤ (*2*::*nat*) ∗ *d* + (*4* + *k*) **by** *arith*
from *h1* **and** *this* **have** *lose* (*t* + (*2* + *j*)) = [*False*] **by** *blast*
from *this* **show** *?thesis* **by** *simp*
qed

lemma *aux4lose2*:
assumes *h1*:∀ *j*≤*2* ∗ *d* + (*4* + *k*). *lose* (*t* + *j*) = [*False*]
and *h2*:*3* + *k* + *d* ≤ *2* ∗ *d* + (*4* + *k*)
shows *lose* (*t* + (*3*::*nat*) + *k* + *d*) = [*False*]
proof −
from *assms* **have** *lose* (*t* + ((*3*::*nat*) + *k* + *d*)) = [*False*] **by** *blast*
from *this* **show** *?thesis* **by** (*simp add*: *arith-sum1*)
qed

lemma *aux4req*:
assumes *h1*:∀ (*m*::*nat*) ≤ *k* + *2*. *req* (*t* + *m*) ≠ [*send*]
and *h2*:*m* ≤ *k*
and *h3*:*req* (*t* + *2* + *m*) = [*send*]
shows *False*
proof −
from *h2* **have** (*2*::*nat*) + *m* ≤ *k* + (*2*::*nat*) **by** *arith*
from *h1* **and** *this* **have** *req* (*t* + (*2* + *m*)) ≠ [*send*] **by** *blast*
from *this* **and** *h3* **show** *?thesis* **by** *simp*
qed

lemma *GatewaySystem-L2*:
assumes *h1*:*Gateway req dt a stop lose d ack i vc*
and *h2*:*ServiceCenter i a*
and *h3*:*GatewayReq req dt a stop lose d ack i vc*
and *h4*:*msg* (*Suc 0*) *req*
and *h5*:*msg* (*Suc 0*) *stop*
and *h6*:*msg* (*Suc 0*) *a*
and *h7*:*ts lose*
and *h8*:*ack t* = [*init-state*]
and *h9*:*req* (*Suc t*) = [*init*]
and *h10*:∀ *t1*≤*t*. *req t1* = []

and *h11*:$\forall\, m \leq k + 2.\ req\ (t + m) \neq [send]$
and *h12*:$req\ (t + 3 + k) = [send]$
and *h13*:$inf\text{-}last\text{-}ti\ dt\ t \neq []$
and *h14*:$\forall\, j \leq 2 * d + (4 + k).\ lose\ (t + j) = [False]$
shows $vc\ (2 * d + (t + (4 + k))) = [vc\text{-}com]$
proof −
have $Suc\ 0 \leq 2 * d + (4 + k)$ **by** *arith*
from *h14* **and** *this* **have** $lose\ (t + Suc\ 0) = [False]$ **by** *blast*
from *this* **have** *sg1*:$lose\ (Suc\ t) = [False]$ **by** *simp*
have $Suc\ (Suc\ 0) \leq 2 * d + (4 + k)$ **by** *arith*
from *h14* **and** *this* **have** $lose\ (t + Suc\ (Suc\ 0)) = [False]$ **by** *blast*
from *this* **have** *sg2*:$lose\ (Suc\ (Suc\ t)) = [False]$ **by** *simp*
from *h3* **and** *h4* **and** *h5* **and** *h6* **and** *h7* **and** *h8* **and** *h9* **and** *sg1* **and** *sg2* **have** *sg3*:
$ack\ (t + 2) = [connection\text{-}ok]$
by (*simp add*: *GatewayReq-def*)
from *h14* **have** *sg4*: $\forall\, j \leq k.\ lose\ (t + 2 + j) = [False]$
by (*clarify*, *rule aux4lose1*, *simp*)
from *h11* **have** *sg5*:$\forall\, m \leq k.\ req\ (t + 2 + m) \neq [send]$
by (*clarify*, *rule aux4req*, *auto*)

from *h1* **and** *sg5* **and** *sg4* **and** *sg3* **and** *h4* **and** *h5* **and** *h6* **and** *h7* **have** *sg6*:
$\forall\, m \leq k.\ ack\ (t + 2 + m) = [connection\text{-}ok]$
by (*rule Gateway-L6*)

from *h3* **and** *h4* **and** *h5* **and** *h6* **and** *h7* **and** *h12* **and** *h14* **and** *sg6* **have** *sg10*:
$ack\ (t + 3 + k) = [sending\text{-}data]$
by (*simp add*: *GatewayReq-L1*)
from *h3* **and** *h4* **and** *h5* **and** *h6* **and** *h7* **and** *h12* **and** *h13* **and** *h14* **and** *sg6* **have** *sg11*:
$i\ (t + 3 + k + d) \neq []$
by (*simp add*: *GatewayReq-L2*)

from *h11* **have** *sg12*:$\forall\, m < k + 3.\ req\ (t + m) \neq [send]$ **by** *auto*
from *h14* **have** *sg13*:$\forall\, j \leq k + d + 3.\ lose\ (t + j) = [False]$ **by** *auto*
from *h1* **and** *h7* **and** *h6* **and** *h5* **and** *h4* **and** *h9* **and** *sg12* **and** *h12* **and** *h8* **and** *sg13* **and** *h10*
have *sg14*:$\forall\ t2 < (t + 3 + k + d).\ i\ t2 = []$
by (*simp add*: *Gateway-L7*)
from *sg14* **and** *h2* **have** *sg15*:$\forall\ t3 \leq (t + 3 + k + d).\ a\ t3 = []$
by (*simp add*: *ServiceCenter-L2*)
from *h14* **have** *sg18*:$\forall\, j \leq 2 * d.\ lose\ ((t + 3 + k) + j) = [False]$
by (*simp add*: *streamValue43*)
from *h14* **have** *sg16a*:$\forall\, j \leq 2 * d.\ lose\ (t + j + (4 + k)) = [False]$
by (*simp add*: *streamValue2*)
have *sg16b*:$Suc\ (3 + k) = (4 + k)$ **by** *arith*
from *sg16a* **and** *sg16b* **have** *sg16*:$\forall\, j \leq 2 * d.\ lose\ (t + j + Suc\ (3 + k)) = [False]$

by (*simp* (*no-asm-simp*))
from *h1* **and** *h4* **and** *h5* **and** *h6* **and** *h7* **and** *sg18* **and** *sg10* **and** *sg15* **have** *sg19*:
$\forall x \leq d + d.\ ack\ (t + 3 + k + x) = [sending\text{-}data]$
by (*simp add*: *Gateway-L8*)
from *sg19* **have** *sg19a*:*ack* $(t + 3 + k + d + d) = [sending\text{-}data]$ **by** *auto*
from *sg16* **have** *sg20a*:$\forall j \leq d.\ lose\ (t + 3 + k + d + (Suc\ j)) = [False]$
by (*rule streamValue10*)
have *sg20b*:$3 + k + d \leq 2 * d + (4 + k)$ **by** *arith*
from *h14* **and** *sg20b* **have** *sg20c*:*lose* $(t + 3 + k + d) = [False]$
by (*rule aux4lose2*)
from *sg20a* **and** *sg20c* **have** *sg20*:$\forall j \leq Suc\ d.\ lose\ (t + 3 + k + d + j) = [False]$
by (*rule streamValue8*)
from *h4* **and** *h5* **and** *h6* **and** *h7* **and** *h3* **have** *sg21*:
$ack\ (t + 3 + k + d + d) = [sending\text{-}data] \wedge$
$a\ (Suc\ (t + 3 + k + d)) = [sc\text{-}ack] \wedge$
$(\forall j \leq Suc\ d.\ lose\ (t + 3 + k + d + j) = [False]) \longrightarrow$
$vc\ (Suc\ (t + 3 + k + d + d)) = [vc\text{-}com]$
apply (*simp only*: *GatewayReq-def*)
by (*rule GatewaySystem-L1aux*, *auto*)
from *h2* **and** *sg11* **have** *sg22*:$a\ (Suc\ (t + 3 + k + d)) = [sc\text{-}ack]$
by (*simp only*: *ServiceCenter-def*, *auto*)
from *sg21* **and** *sg19a* **and** *sg22* **and** *sg20* **have** *sg23*:
$vc\ (Suc\ (t + 3 + k + d + d)) = [vc\text{-}com]$ **by** *simp*
have *sg24*:$2 * d + (t + (4 + k)) = (Suc\ (t + 3 + k + d + d))$ **by** *arith*
from *sg23* **and** *sg24* **show** *?thesis*
by (*simp* (*no-asm-simp*), *simp*)
qed

lemma *GatewaySystem-L3*:
assumes *h1*:*Gateway req dt a stop lose d ack i vc*
and *h2*:*ServiceCenter i a*
and *h3*:*GatewayReq req dt a stop lose d ack i vc*
and *h4*:*msg* $(Suc\ 0)$ *req*
and *h5*:*msg* $(Suc\ 0)$ *stop*
and *h6*:*msg* $(Suc\ 0)$ *a*
and *h7*:*ts lose*
and *h8*: $dt\ (Suc\ t) \neq [] \vee dt\ (Suc\ (Suc\ t)) \neq []$
and *h9*: $ack\ t = [init\text{-}state]$
and *h10*:$req\ (Suc\ t) = [init]$
and *h11*:$\forall t1 \leq t.\ req\ t1 = []$
and *h12*:$\forall m \leq k + 2.\ req\ (t + m) \neq [send]$
and *h13*:$req\ (t + 3 + k) = [send]$
and *h14*:$\forall j \leq 2 * d + (4 + k).\ lose\ (t + j) = [False]$
shows $vc\ (2 * d + (t + (4 + k))) = [vc\text{-}com]$
proof −
have $Suc\ 0 \leq 2 * d + (4 + k)$ **by** *arith*

from *h14* **and** *this* **have** *lose* $(t + Suc\ 0) = [False]$ **by** *blast*
from *this* **have** *sg1*:*lose* $(Suc\ t) = [False]$ **by** *simp*
have $Suc\ (Suc\ 0) \leq 2 * d + (4 + k)$ **by** *arith*
from *h14* **and** *this* **have** *lose* $(t + Suc\ (Suc\ 0)) = [False]$ **by** *blast*
from *this* **have** *sg2*:*lose* $(Suc\ (Suc\ t)) = [False]$ **by** *simp*
from *h3* **and** *h4* **and** *h5* **and** *h6* **and** *h7* **and** *h10* **and** *h9* **and** *sg1* **and** *sg2* **have** *sg3*:
ack $(t + 2) = [connection\text{-}ok]$
by (*simp add*: *GatewayReq-def*)
from *h14* **have** *sg4*: $\forall j{\leq}k.\ lose\ (t + 2 + j) = [False]$
by (*clarify*, *rule aux4lose1*, *simp*)
from *h12* **have** *sg5*:$\forall\, m \leq k.\ req\ (t + 2 + m) \neq [send]$
by (*clarify*, *rule aux4req*, *auto*)

from *h1* **and** *sg5* **and** *sg4* **and** *sg3* **and** *h4* **and** *h5* **and** *h6* **and** *h7* **have** *sg6*:
$\forall\, m \leq k.\ ack\ (t + 2 + m) = [connection\text{-}ok]$
by (*rule Gateway-L6*)
from *sg6* **have** *sg6a*:*ack* $(t + 2 + k) = [connection\text{-}ok]$ **by** *simp*

from *h3* **and** *h4* **and** *h5* **and** *h6* **and** *h7* **and** *h13* **and** *h14* **and** *sg6* **have** *sg10*:
ack $(t + 3 + k) = [sending\text{-}data]$
by (*simp add*: *GatewayReq-L1*)
from *h3* **and** *h4* **and** *h5* **and** *h6* **and** *h7* **have** *sg11a*:
ack $(t + 2 + k) = [connection\text{-}ok] \wedge$
req $(Suc\ (t + 2 + k)) = [send] \wedge$
$(\forall j{\leq}Suc\ d.\ lose\ ((t + 2 + k) + j) = [False]) \longrightarrow$
i $(Suc\ (t + (2{::}nat) + k + d)) = inf\text{-}last\text{-}ti\ dt\ (t + 2 + k)$
apply (*simp only*: *GatewayReq-def*)
by (*rule GatewaySystem-L3aux*, *auto*)
have *sg12*:$Suc\ (t + 2 + k) = t + 3 + k$ **by** *arith*
from *h13* **and** *sg12* **have** *sg12a*:*req* $(Suc\ (t + 2 + k)) = [send]$
by (*simp add*: *eval-nat-numeral*)
from *h14* **have** *sg13*:$\forall j{\leq}Suc\ d.\ lose\ ((t + 2 + k) + j) = [False]$
by (*rule streamValue12*)
from *sg11a* **and** *sg6a* **and** *h13* **and** *sg12a* **and** *sg13* **have** *sg14*:
i $(Suc\ (t + (2{::}nat) + k + d)) = inf\text{-}last\text{-}ti\ dt\ (t + 2 + k)$ **by** *simp*
from *h8* **have** *sg15*:*inf-last-ti dt* $(t + 2 + k) \neq []$
by (*rule inf-last-ti-Suc2*)
from *sg14* **and** *sg15* **have** *sg16*: *i* $(t + 3 + k + d) \neq []$
by (*simp add*: *arith-sum4*)

from *h14* **have** *sg17*:$\forall j{\leq}k + d + 3.\ lose\ (t + j) = [False]$ **by** *auto*
from *h12* **have** *sg18*:$\forall\, m < (k + 3).\ req\ (t + m) \neq [send]$ **by** *auto*
from *h1* **and** *h4* **and** *h5* **and** *h6* **and** *h7* **and** *h10* **and** *sg18* **and** *h13* **and** *h9* **and** *sg17* **and** *h11*
have *sg19*:$\forall\ t2 < (t + 3 + k + d).\ i\ t2 = []$
by (*simp add*: *Gateway-L7*)
from *h2* **and** *sg19* **have** *sg20*:$\forall\ t3 \leq (t + 3 + k + d).\ a\ t3 = []$

by (*simp add*: *ServiceCenter-L2*)
from *h14* **have** *sg21*:$\forall\, j{\leq}2 * d.\ lose\ (t + 3 + k + j) = [False]$
by (*simp add*: *streamValue43*)
from *h1* **and** *h4* **and** *h5* **and** *h6* **and** *h7* **and** *sg21* **and** *sg10* **and** *sg20* **have** *sg22*:
$\forall\, x \leq d + d.\ ack\ (t + 3 + k + x) = [sending\text{-}data]$
by (*simp add*: *Gateway-L8*)
from *h2* **and** *h3* **and** *h4* **and** *h5* **and** *h6* **and** *h7* **and** *h14* **and** *sg16* **and** *sg22*
show *?thesis*
by (*simp add*: *GatewaySystem-L1*)
qed

15.12 Proof of the Refinement for the Gateway System

lemma *GatewaySystem-L0*:
assumes *h1*:*GatewaySystem req dt stop lose d ack vc*
shows *GatewaySystemReq req dt stop lose d ack vc*
proof −
from *h1* **obtain** *x i* **where**
a1:*Gateway req dt x stop lose d ack i vc* **and**
a2:*ServiceCenter i x*
by (*simp add*: *GatewaySystem-def*, *auto*)
from *a1* **have** *sg1*:*GatewayReq req dt x stop lose d ack i vc*
by (*simp add*: *Gateway-L0*)
from *a2* **have** *sg2*:*msg* (*Suc 0*) *x*
by (*simp add*: *ServiceCenter-a-msg*)
from *h1* **and** *a1* **and** *a2* **and** *sg1* **and** *sg2* **show** *?thesis*
apply (*simp add*: *GatewaySystemReq-def*, *auto*)
apply (*simp add*: *GatewaySystem-L3*)
apply (*simp add*: *GatewaySystem-L3*)
apply (*simp add*: *GatewaySystem-L3*)
by (*simp add*: *GatewaySystem-L2*)
qed

end

References

[1] M. Broy. Compositional refinement of interactive systems modelled by relations. *COMPOS'97: Revised Lectures from the International Symposium on Compositionality: The Significant Difference*, pages 130–149, 1998.

[2] M. Broy and K. Stølen. *Specification and Development of Interactive Systems: Focus on Streams, Interfaces, and Refinement*. Springer, 2001.

[3] FlexRay Consortium. http://www.flexray.com.

[4] FlexRay Consortium. *FlexRay Communication System - Protocol Specification - Version 2.0*, 2004.

[5] C. Kühnel and M. Spichkova. Fault-Tolerant Communication for Distributed Embedded Systems. In *Software Engineering and Fault Tolerance*, Series on Software Engineering and Knowledge Engineering, 2007.

[6] C. Kühnel and M. Spichkova. Upcoming automotive standards for fault-tolerant communication: FlexRay and OSEKtime FTCom. In *EFTS International Workshop on Engineering of Fault Tolerant Systems*, 2006.

[7] T. Nipkow, L. C. Paulson, and M. Wenzel. *Isabelle/HOL – A Proof Assistant for Higher-Order Logic*. LNCS. Springer, 2013.

[8] M. Spichkova, H. Schmidt, and I. Peake. *From abstract modelling to remote cyberphysical integration/interoperability testing*. In *Improving Systems and Software Engineering Conference (iSSEC)*, 2013.

[9] M. Spichkova and A. Campetelli. *Towards system development methodologies: From software to cyber-physical domain*. In *International Workshop on Formal Techniques for Safety-Critical Systems*, 2012.

[10] M. Spichkova. Towards Focus on Time. In *12th International Workshop on Automated Verification of Critical Systems (AVoCS'12)*, 2012.

[11] M. Spichkova. Architecture: Requirements+ Decomposition+ Refinement. In *Softwaretechnik-Trends 31 (4)*, 2011.

[12] M. Spichkova. *Specification and Seamless Verification of Embedded Real-Time Systems: FOCUS on Isabelle*. PhD thesis, 2007.

[13] M. Spichkova. *FlexRay: Verification of the FOCUS Specification in Isabelle/HOL. A Case Study*. Technische Universität München, Tech. Rep., TUM-I0602, 2006.

[14] Verisoft project. http://www.verisoft.de.

[15] M. Wenzel. *The Isabelle/Isar Reference Manual*. TU München, 2013.